

Rittal – The System.

Faster – better – everywhere.

▶ TS punched section with mounting flange, 23 x 73 mm – TS 8612.560

Date : Nov 28, 2019

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



TS punched section with mounting flange, 23 x 73 mm – TS 8612.560

created: 28.11.2019 build on www.rittal.com/uk-en

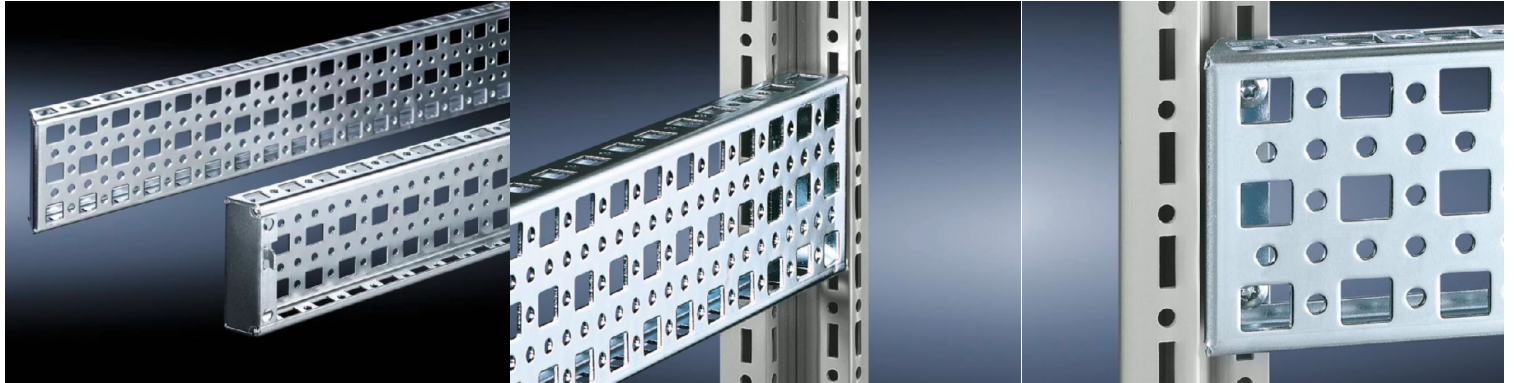

Product description

Description:	The alternative to the TS punched section with mounting flange 17 x 73 mm, with punchings for captive nuts/threaded blocks instead of the slotted holes top and bottom. Simply locate and secure.
Material:	Sheet steel
Surface finish:	Zinc-plated
Supply includes:	Assembly screws

Product features

To fit:	Enclosure type: the inner mounting level Width/depth: 600 mm
Installation options:	On the vertical TS, SE enclosure section
Packs of:	4 pc(s).
Weight/pack:	2.76 kg
Copper weight (kg per piece):	0
EAN:	4028177237391
Customs tariff number:	73269098

ETIM 7.0:	EC002625
ETIM 6.0:	EC002625
eCl@ss 8.0/8.1:	27189234
eCl@ss 6.0/6.1:	23159101
Product description:	TS TS punched section with mounting flange, 23 x 73 mm, for inner mounting level: W/D: 600 mm
Approvals	
Certificates:	EAC