

Bulletin 800FC
22.5 mm Configured Pendant Stations
 Product Selection

Product Selection
 Enclosures

Enclosure Type	Pkg. Quantity	Pendants — Yellow Plastic IP66 Cat. No.*
3-hole	1	800FC-3Z
5-hole		800FC-5Z
7-hole		800FC-7Z
9-hole		800FC-9Z

* Housings supplied with cable sleeve, hanger ring, cable clamp, wire guides, and gasket.



Cat. No. 800FC-3Z



Cat. No. 800FC-7Z

1-, 2-, and 3-Speed Operators §*

800FP - C $\frac{A}{a}$ $\frac{1}{b}$ $\frac{U243}{c}$



a


Operator Type	
Code	Description
A	1-speed single arrow
D	1-speed double arrow
B	2-speed
C	3-speed*

* Proper contact block assembly of these devices is required. Please see contact block information on page 104.

b

Cap Color	
Code	Description
1	White
2	Black

Arrow Direction Chart

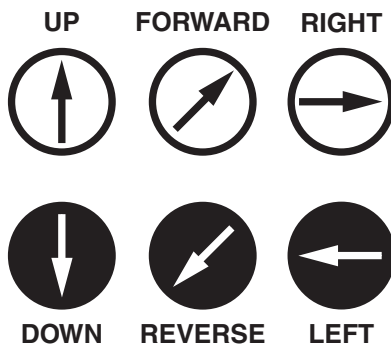

c

Symbol	Code	Valid with Table a Selections:	Description†			
			Vertical Mounting		Horizontal Mounting	
			Black with White Arrow	White with Black Arrow	White with Black Arrow	Black with White Arrow
	U100	A, B, C	Blank	Blank	Blank	Blank
One-Speed Operators						
	U241	A	DOWN	UP	—	—
	U243		—	—	RIGHT	LEFT
	U244		REVERSE	FORWARD	—	—
	U246		—	—	FORWARD	REVERSE
	U700		LEFT	RIGHT	UP	DOWN
	U261	D	DOWN FAST	UP FAST	—	—
	U263		—	—	RIGHT FAST	LEFT FAST
	U264		REVERSE FAST	FORWARD FAST	—	—
	U266		—	—	FORWARD FAST	REVERSE FAST
	U260		LEFT FAST	RIGHT FAST	UP FAST	DOWN FAST
Two-Speed Operators						
	U271	B	2-speed DOWN	2-speed UP	—	—
	U273		—	—	2-speed RIGHT	2-speed LEFT
	U274		2-speed REVERSE	2-speed FORWARD	—	—
	U276		—	—	2-speed FORWARD	2-speed REVERSE
	U270		2-speed LEFT	2-speed RIGHT	2-speed UP	2-speed DOWN
Three-Speed Operators						
	U291	C	3-speed DOWN	3-speed UP	—	—
	U293		—	—	3-speed RIGHT	3-speed LEFT
	U294		3-speed REVERSE	3-speed FORWARD	—	—
	U296		—	—	3-speed FORWARD	3-speed REVERSE
	U290		3-speed LEFT	3-speed RIGHT	3-speed UP	3-speed DOWN

Note: Please see page 104 for proper latch and contact block configurations.

† Text (DOWN, UP, LEFT, etc.) indicates arrow direction. Text is **not** printed on operators.

§ Cat. No. 800F-ALP (standard latch) and Cat. No. 800FC-ALP (mechanical interlock latch) can be used with these operators.

* Booted style of operators for pendant stations.