




DESCRIPTION:

Our range of insulated tabs and receptacles are suitable for wires from 0.25mm² to 6.0mm². All types have a copper reinforcement sleeve and are made from copper-alloy, electro-finned. They feature high mechanical and dielectric resistant insulation, with heat resistant up to +75°C.

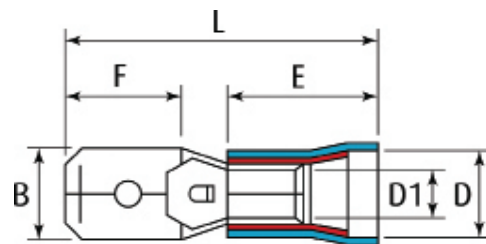

SPECIFICATION:

PVC:

MATERIAL: Electro-tin plated copper
INSULATION: Polyvinyl Chloride
APPROVALS: UL, E211389, RoHS compliant
MAX TEMPERATURE: 75°C
MAX VOLTAGE: 300V



NYLON:

MATERIAL: Electro-tin plated copper
INSULATION: Nylon
APPROVALS: UL, E211389, RoHS compliant
MAX TEMPERATURE: 105°C
MAX VOLTAGE: 300V



PART NUMBERS:

COLOUR/WIRE Ø mm ²	PART NO.		Max. elect. rating (A)	FOR TAB		DIMENSIONS (mm)						PACK QTY.
	PVC	NYLON		WIDTH (mm)	DEPTH (mm)	B	F	L	E	D	D1	
0.5 - 1.5 RED	CIPOM1	CNIPOM1	10	6.35	0.8	6.4	7.8	21.2	10.0	4.3	1.7	100
	CIPOM1-4.8x	CNIPOM1-4.8x	10	4.8	0.5	4.8	7.8	20.5	10.0	4.0	1.7	100
1.5 - 2.5 BLUE	CIPOM2	CNIPOM2	15	6.35	0.8	6.4	7.8	21.2	10.0	5.0	2.3	100
	CIPOM2-4.8x	CNIPOM2-4.8x	15	4.8	0.8	4.8	7.0	19.2	10.0	4.5	2.3	100
4-6 YELLOW	CIPOM3	CNIPOM3	24	6.35	0.8	6.4	7.8	23.7	12.5	6.5	3.4	50



Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297