



DESCRIPTION:


Our Nylon Insulated Halogen-Free Ring Terminals feature a 90° right angle. They are electro-tin plated for excellent conductivity and resistance to corrosion. They have a maximum temperature of 105°C with 600 volts maximum electrical rating. Ideal for tight spaces.

APPLICATIONS:

Our Halogen-Free terminals create a secure and reliable, electrical and mechanical connection. Ideal for tight spaces.

SPECIFICATION:

INSULATED MATERIAL: Easy Entry Nylon - Halogen Free
PLATING: Electro-Tin Plated
TERMINAL MATERIAL: Copper
MAX. TEMPERATURE: 105°C
MAX. ELECTRICAL RATING: 600 Volts

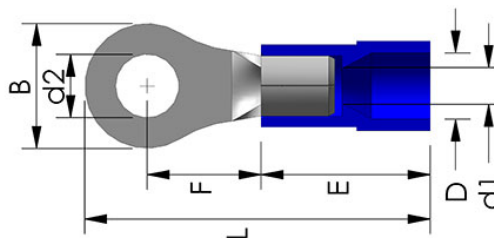

PART NUMBERS:

CABLECRAFT PART NUMBER	SUPPLIER PART NUMBER	COLOUR	STUD SIZE D2 (mm)	WIRE RANGE AWG/mm ²	D1	B	L	F	E	D	PACK SIZE
PACKS											
CNIR1-4RA	90R1-4LA	Red	4.3	22-16/0.5-1.5mm ²	1.7	8.0	22.0	7.0	11.0	4.1	100
CNIR1-5RA	90R1-5A	Red	5.3	22-16/0.5-1.5mm ²	1.7	8.0	22.0	7.0	11.0	4.1	100
CNIR2-4RA	90R2-4LA	Blue	4.3	16-14/1.5-2.5mm ²	2.3	8.5	23.0	7.8	11.0	4.1	100
CNIR2-5RA	90R2-5LA	Blue	5.3	16-14/1.5-2.5mm ²	2.3	9.5	23.0	7.3	11.0	4.5	100



Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297