

**DESCRIPTION:**


Made from Polyolefin, these connector strips are available in 12 way strips in: 5A, 15A, 30A and 60A. Easy-cut and low-cost; all screws are captive and raised for easy wiring.

**APPLICATION:**

A range of 12 way connector strips available in 5A, 15A, 30A and 60A.

**SPECIFICATIONS:**

<b>INSERTS:</b> Brass
<b>HOUSING:</b> Polyethylene (PE)
<b>TEMPERATURE:</b> 80°C
<b>SCREWS:</b> Galvanised Steel
<b>STANDARD:</b> CE
<b>COLOUR:</b> Natural

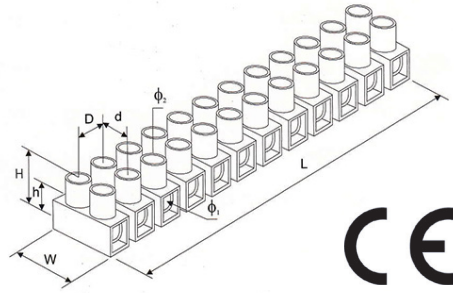

**PART NUMBERS:**

PART NUMBER	CROSS SECTION	RATED CURRENT	RATED VOLTAGE	DIMENSIONS (mm)								PACK SIZE
				L	W	Ø <sub>1</sub>	Ø <sub>2</sub>	D	d	H	h	
PCS5	6mm <sup>2</sup>	5-32A	380V	115	18.8	3.3	2.6	10	8	15	8.8	1
PCS15	12mm <sup>2</sup>	15-61A	400V	137	22.5	4.5	2.8	12	10	18.8	10.2	1
PCS30	16mm <sup>2</sup>	30-76A	400V	165	25.5	5.5	3.0	14	11	19.8	11.2	1
PCS60	25mm <sup>2</sup>	60-101A	400V	187	31.2	6.5	3.8	16.5	13	25.5	14.8	1

Cross Section: rated for rigid wires and cables (if for flexible wires, it should be reduced one-size, i.e. 6mm<sup>2</sup> to 4mm<sup>2</sup>)  
 Ø<sub>1</sub> wire entry hole diameter  
 Ø<sub>2</sub> fixing hole diameter



Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.  
 Phone: 01582 606033 • Fax: 01582 606063 • Email: sales@cablecraft.co.uk • Web: www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297

FILE NO. 5.0  
 ISSUE NO. 001