

Metal tongue cable ties have higher flexibility and resistance than normal nylon ties. They are infinitely adjustable for tight bundles through its entire bundle range.

- The special design of the metal tongue cable tie guarantees maximum resistance and safety even in the most extreme applications.
- The design of the head optimizes grip, thereby speeding up application.
- The increased size of the hardened stainless steel teeth (with added Molybdenum) ensures extremely high mechanical strength and optimal resistance to corrosion.




SPECIFICATION:

- COLOUR OPTIONS:** Black or Natural
- MATERIAL:** Nylon 6.6 with 316 Stainless Steel Tooth
- SERVICE TEMPERATURE RANGE:** -40°C to +65°C
- SELF-EXTINGUISHING:** MAF/05 with reference to UL94 classification: V2; UL File No. E160935.
- STANDARDS:** UL: E160935.



STAINLESS STEEL TOOTH WITH 60° CUTTING ANGLE AND 45° PITCH.

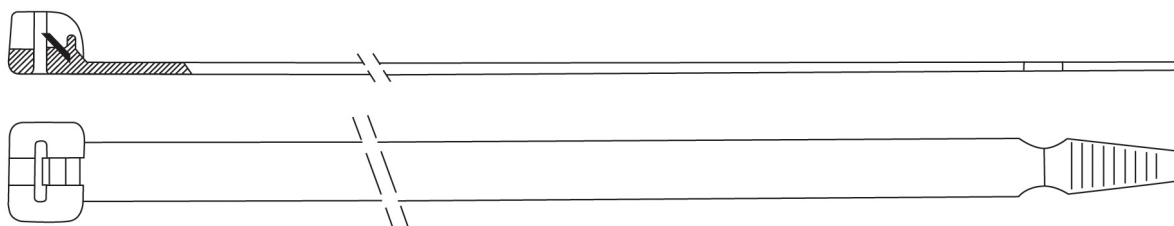

PART NUMBERS:

PART NO. NATURAL	PART NO. BLACK	WIDTH (mm)	LENGTH (mm)	MAX. BUNDLE DIA. (mm)	MIN. TENSILE STRENGTH Kg	PACK QTY
CTR 100MT	CTR 100BMT	2.5	100	24	18	100
CTR 200MT	CTR 200BMT		200	55	18	100
CTR 140MT	CTR 140BMT	3.5	140	36	28	100
CTR 200-3.6MT	CTR 200-3.6BMT		200	55	28	100
CTR 200-4.8MT	CTR 200-4.8BMT	4.5	200	55	40	100
CTR 300-4.8MT	CTR 300-4.8BMT		300	80	40	100
CTR 360-4.8MT	CTR 360-4.8BMT		360	101	40	100
CTR 360-7.6MT	CTR 360-7.6BMT	7.5	360	101	80	50



CABLECRAFT
creative wiring solutions



Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297