




DESCRIPTION:

Our range of insulated tabs and receptacles are suitable for wires from 0.5mm² to 6.0mm². All types have a copper reinforcement sleeve and are made from copper-alloy, electro tinned. They feature high mechanical and dielectric resistant insulation, with heat resistant up to +75°C.

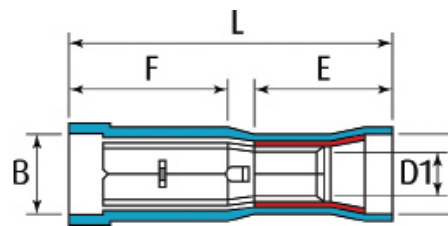

SPECIFICATION:

PVC:

MATERIAL: Electro-tin plated copper
INSULATION: Polyvinyl Chloride
APPROVALS: UL, E211389, RoHS compliant
MAX TEMPERATURE: 75°C
MAX VOLTAGE: 300V



NYLON:

MATERIAL: Electro-tin plated copper
INSULATION: Nylon
APPROVALS: UL, E211389, RoHS compliant
MAX TEMPERATURE: 105°C
MAX VOLTAGE: 300V



PART NUMBERS:

DIMENSIONS (mm)

COLOUR/WIRE Ø mm ²	PART NO.		Max. elect. rating (A)	B	L	F	E	D	D1	PACK QTY
	PVC	NYLON								
0.5-1.5 RED	CIAB1F	CNIAB1F	10	4.0	23.0	8.5	10.0	4.3	1.7	100
1.5-2.5 BLUE	CIAB2F	CNIAB2F	15	4.0	23.0	8.5	10.0	5.0	2.3	100
	CIAB2F5	CNIAB2F5	15	5.0	23.0	8.5	10.0	5.0	2.3	100
4-6 YELLOW	CIAB3F	CNIAB3F	24	5.0	25.0	8.5	13.0	6.5	3.4	100



Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297