




DESCRIPTION:

Our range of insulated tabs and receptacles are suitable for wires from 0.25mm² to 6.0mm². All types have a copper reinforcement sleeve and are made from copper-alloy, electro tinned. They feature high mechanical and dielectric resistant insulation, with heat resistant up to +75°C.

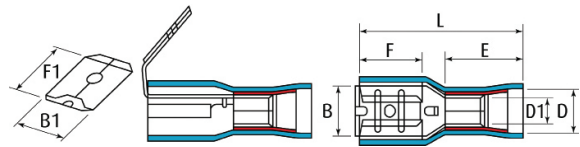

TAB WIDTH: 6.4mm
TAB THICKNESS: 0.8mm

SPECIFICATION:

PVC:

MATERIAL: Electro-tin plated copper
INSULATION: Polyvinyl Chloride
APPROVALS: UL, E211389, RoHS compliant
MAX TEMPERATURE: 75°C
MAX VOLTAGE: 300V



NYLON:

MATERIAL: Electro-tin plated copper
INSULATION: Nylon
APPROVALS: UL, E211389, RoHS compliant
MAX TEMPERATURE: 105°C
MAX VOLTAGE: 300V



PART NUMBERS:

DIMENSIONS (mm)

COLOUR/WIRE Ø mm ²	PART NO.		Max. elect. rating (A)	B	B1	F	F1	L	E	D	D1	PACK QTY
	PVC	NYLON										
0.5-1.5 RED	CIFPB1-6.3F	CNIFPB1-6.3F	10	6.6	6.4	8.0	8.2	22.0	10.0	4.3	1.7	50
1.5-2.5 BLUE	CIFPB2-6.3F	CNIFPB1-6.3F	15	6.6	6.4	8.0	8.2	22.0	10.0	5.0	2.3	50
4-6 YELLOW	CIFPB3-6.3F	CNIFPB1-6.3F	24	6.6	6.4	8.0	8.2	23.5	13	6.5	3.4	25



CABLECRAFT
creative wiring solutions



Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297