



Cablecraft's range contains sizes for cables from 10mm<sup>2</sup> - 95mm<sup>2</sup> and stud sizes from 4mm to 16.0mm. They maintain strength during the crimping cycle, and are electro tin plated for maximum corrosion resistance and conductivity. Din Standard 46234. The maximum electrical rating in AMPs has been tested at a constant working temperature of 50°C.

**SPECIFICATION:**

**MATERIAL:**


Electrolytic Copper, Electro-Tin Plated



**MAX. ELEC. RATING:**

- 10mm<sup>2</sup> - 70 AMP
- 16mm<sup>2</sup> - 95 AMP
- 25mm<sup>2</sup> - 125 AMP
- 35mm<sup>2</sup> - 170 AMP
- 50mm<sup>2</sup> - 230 AMP
- 70mm<sup>2</sup> - 265 AMP
- 95mm<sup>2</sup> - 310 AMP

**APPROVALS:** DIN STANDARD 46234

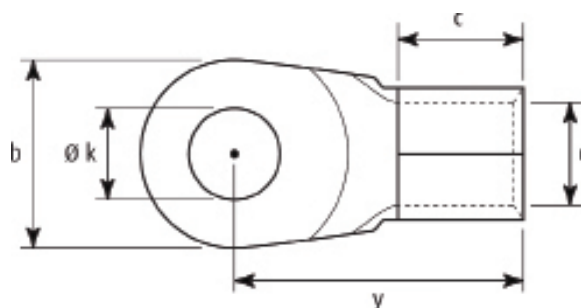

**DIMENSIONS (mm)**

CABLE SIZE (mm <sup>2</sup> )	PART NO.	STUD SIZE D2 (mm)	MAX. ELEC RATING (A)	d	y	b	c	ØK	PACK QTY
10	CST10-4	4	70	4.5	16.0	10.0	8.0	4.3	50
	CST10-5	5	70	4.5	16.0	10.0	8.0	5.3	50
	CST10-6	6	70	4.5	17.0	11.0	8.0	6.5	50
	CST10-8	8	70	4.5	20.0	14.0	8.0	8.4	50
	CST10-10	10	70	4.5	21.0	18.0	8.0	10.5	50
	CST10-12	12	70	4.5	23.0	22.0	8.0	13.0	50
16	CST16-5	5	95	5.8	20.0	11.0	10.0	5.3	50
	CST16-6	6	95	5.8	20.0	11.0	10.0	6.5	50
	CST16-8	8	95	5.8	22.0	14.0	10.0	8.4	50
	CST16-10	10	95	5.8	24.0	18.0	10.0	10.5	50
	CST16-12	12	95	5.8	26.0	22.0	10.0	13.0	50
25	CST25-5	5	125	7.5	25.0	12.0	11.0	5.3	50
	CST25-6	6	125	7.5	25.0	12.0	11.0	6.5	50
	CST25-8	8	125	7.5	25.0	16.0	11.0	8.4	50
	CST25-10	10	125	7.5	26.0	18.0	11.0	10.5	50
	CST25-12	12	125	7.5	31.0	22.0	11.0	13.0	50
	CST25-14	14	125	7.5	31.0	22.0	11.0	15.0	50
	CST25-16	16	125	7.5	35.0	28.0	11.0	17.0	50



CABLE SIZE (mm <sup>2</sup> )	PART NO.	STUD SIZE D2 (mm)	MAX. ELEC	DIMENSIONS (mm)					PACK QTY
				d	y	b	c	ØK	
35	CST35-6	6	170	9.0	26.0	15.0	12.0	6.5	50
	CST35-8	8	170	9.0	26.0	16.0	12.0	8.4	50
	CST35-10	10	170	9.0	27.0	18.0	12.0	10.5	50
	CST35-12	12	170	9.0	31.0	22.0	12.0	13.0	50
	CST35-14	14	170	9.0	31.0	22.0	12.0	15.0	50
	CST35-16	16	170	9.0	35.0	28.0	12.0	17.0	50
50	CST50-6	6	230	11.0	34.0	18.0	16.0	6.5	50
	CST50-8	8	230	11.0	34.0	18.0	16.0	8.4	50
	CST50-10	10	230	11.0	34.0	18.0	16.0	10.5	50
	CST50-12	12	230	11.0	36.0	22.0	16.0	13.0	50
	CST50-14	14	230	11.0	36.0	22.0	16.0	15.0	50
	CST50-16	16	230	11.0	40.0	22.0	16.0	17.0	50
70	CST70-8	8	265	13.0	38.0	22.0	18.0	8.4	25
	CST70-10	10	265	13.0	38.0	22.0	18.0	10.5	25
	CST70-12	12	265	13.0	38.0	22.0	18.0	13.0	25
	CST70-14	14	265	13.0	38.0	22.0	18.0	15.0	25
	CST70-16	16	265	13.0	42.0	28.0	18.0	17.0	25
95	CST95-10	10	310	15.0	42.0	24.0	20.0	10.5	25
	CST95-12	12	310	15.0	42.0	24.0	20.0	13.0	25
	CST95-14	14	310	15.0	42.0	24.0	20.0	15.0	25
	CST95-16	16	310	15.0	44.0	28.0	20.0	17.0	25



**CABLECRAFT**

creative wiring solutions



**INVESTORS  
IN PEOPLE**



Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.  
**Phone:** 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297