



CTT Vibration Resistant terminals have an additional copper sleeve fitted over the conductor barrel. This provides a strong mechanical grip on the cable insulation and protects the electrical connection from vibration and mechanical stresses. The high specification of the crimp is coupled with matched crimp tool and die; they fully conform to the performance and standards. Full product and crimping training is now available; please contact us for more details.



SPECIFICATION:

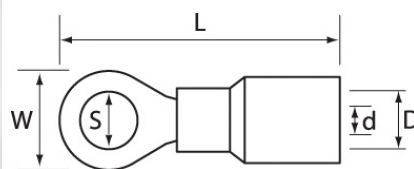

- Insulating Material: **Nylon**
- Maximum Working Temperature: **105°C**
- Crimp Performance: **RSE/STD/024 Part 7**
- Restricted neck ensures correct crimping of thin wall high performance cables.
- Strong mechanical grip on cable insulation.
- Brazed seam barrel.
- Suitable for any application subject to vibration.

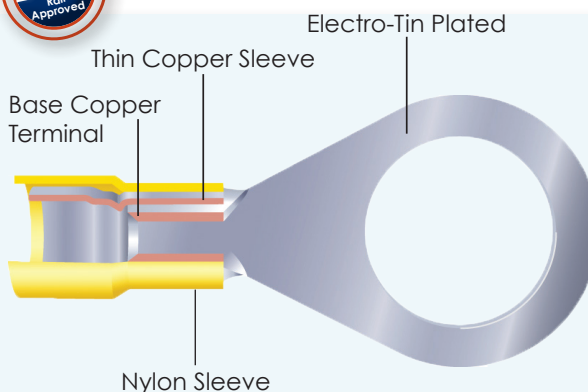

DIMENSIONS (mm)

WIRE mm ² /AWG	PART NO.	STUD SIZE (mm)	S	W	L	d	D	PACK QTY
0.30-1.65mm² 22-16 AWG RED	R37PR-VR-N	3.5	3.7	6.8	19.4	1.7	3.6	100
	R43PR-VR-N	4.0	4.3	8.0	21.1	1.7	3.6	100
	R53PR-VR-N	5.0	5.3	8.0	21.1	1.7	3.6	100
	R65PR-VR-N	6.0	6.4	12.0	25.7	1.7	3.6	100
	R85PR-VR-N	8.0	8.4	12.0	25.7	1.7	3.6	100
1.04-2.63mm² 16-14 AWG BLUE	B32PR-VR-N	3.0	3.2	8.5	23.0	2.3	4.5	100
	B37PR-VR-N	3.5	3.7	6.6	19.9	2.3	4.3	100
	B43PR-VR-N	4.0	4.3	8.0	21.6	2.3	4.3	100
	B53PR-VR-N	5.0	5.3	8.0	21.6	2.3	4.3	100
	B65PR-VR-N	6.0	6.4	12.0	27.0	2.3	4.3	100
	B85PR-VR-N	8.0	8.4	12.0	27.0	2.3	4.3	100
2.63-6.64mm² 12-10 AWG YELLOW	Y37PR-VR-N	3.5	3.7	9.0	25.7	3.4	6.0	100
	Y43PR-VR-N	4.0	4.3	9.5	27.0	3.4	6.0	100
	Y53PR-VR-N	5.0	5.3	9.5	27.0	3.4	6.0	100
	Y65PR-VR-N	6.0	6.4	12.0	30.5	3.4	6.0	100
	Y85PR-VR-N	8.0	8.4	15.0	35.5	3.4	6.0	100
	Y10PR-VR-N	10.0	10.5	15.0	35.5	3.4	6.0	100
	Y12PR-VR-N	12.0	13.0	19.2	40.0	3.4	6.0	100



CABLECRAFT
creative wiring solutions



Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • Fax: 01582 606063 • Email: sales@cablecraft.co.uk • Web: www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297