



INDUSTRY EXPERTISE
IN AUTOMATION
AND ELECTRONICS

CONTENTS





COMPANY OVERVIEW 4

TECHNOLOGY EXPERTISE 18

SUBRACKS 28

**INSTRUMENT CASES AND
SYSTEM ENCLOSURES** 94

COMPONENTS AND ACCESSORIES 124

INDUSTRIAL PC 204

SYSTEM PLATFORMS 218

LIST OF ORDER NUMBERS 258

LIST OF TECHNICAL TERMS 268

COMPANY OVERVIEW






CORE COMPETENCE

HEITEC is known for industrial expertise in automation and electronics and offers solutions, products and services in the fields of software, mechanics and electronics. Its customers improve their productivity and optimise their products with the help of HEITEC's state-of-the-art, reliable and economical system solutions. A work force of over 1000 employees at numerous sites worldwide provides high-quality industry skills close to the customer.

Our experienced employees have in-depth, specialised technical knowledge and are also familiar with the specific requirements of industries such as plant and machine construction, energy supply, transportation, aerospace and aeronautics, medical technology, information and communications technology, and measurement and test engineering.

We are always finding new applications for this accumulated knowledge and experience, and thus have access to a wealth of tried-and-tested solutions for a variety of fields. Our design and manufacturing processes are audited and certified to meet the requirements of their respective sectors, guaranteeing the robustness and long service life of our products.

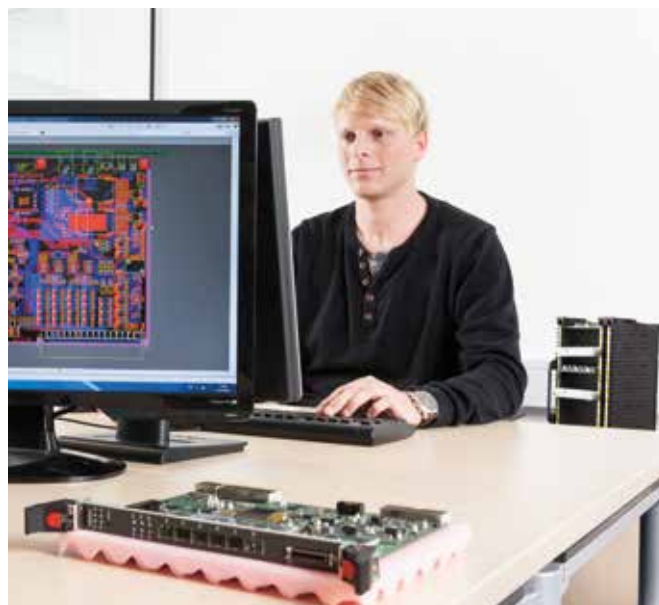

COMPANY OVERVIEW

INDUSTRY EXPERTISE IN AUTOMATION AND ELECTRONICS



HEITEC offers innovative automation solutions for both newly planned projects and system modernisations (retrofits) in plant and machine construction, as well as in production – from planning to all-inclusive implementation.

AUTOMATION

Faster to networked production

The solution portfolio from HEITEC's Business Unit Automation includes measurement and test engineering, robotics, complete production systems, and energy technology. As experts in automation and information technology, we can offer solutions for rapid production networking under the HEITEC 4.0 banner:

From digital plant and process planning to virtual commissioning and the monitoring of plants and manufacturing processes: our solutions make it possible to develop a smart factory with adaptive machines and systems, as well as decentralised manufacturing controls.

Practical, step-by-step introduction of Industry 4.0

- Optimisation of processes, plant and quality
- Shortened commissioning periods
- Reduced throughput times
- Reliable planning thanks to real-time data
- Optimised material and component consumption
- Improved construction quality





What is it that makes HEITEC electronics so special?

Three areas of expertise – design, chassis technology and manufacturing – that work together smoothly to meet the increasingly complex requirements of our customers:

Design: This is based on our 30-years history as an expert service provider in the area of electronic design.

Chassis technology: A stable, modular system of chassis technology and an extensive library of proven hardware, software and mechanical building blocks from Rittal's former portfolio of electronic packaging systems.

Manufacturing: Since we know how important it is to manufacture products flexibly and yet cost-effectively, particularly when it comes to low and medium module quantities, our portfolio is rounded out by the right manufacturing capacities to meet your needs.

ELECTRONICS


From idea to product

Our comprehensive portfolio helps you achieve your system solution more swiftly, cost effectively, flexibly and safely – from the module to the board design, all the way to the complete chassis. Thanks to our extensive experience from many projects, with differing levels of added value in a range of demanding industries and for many different target applications, we understand your specific requirements and reflect them in our solutions.

We have a comprehensive library of proven hardware, software and mechanical building blocks that we can draw on for every solution we create.

Expertise in tailor-made solutions

- Customer-specific products and solutions implemented more swiftly, safely, and cost-effectively
- Products perfectly optimised thanks to in-depth knowledge of the industry – including for demanding, regulated markets
- The same high design and manufacturing quality for both small and large series
- Optimised products with a large test depth
- Ongoing development of products throughout the entire lifecycle

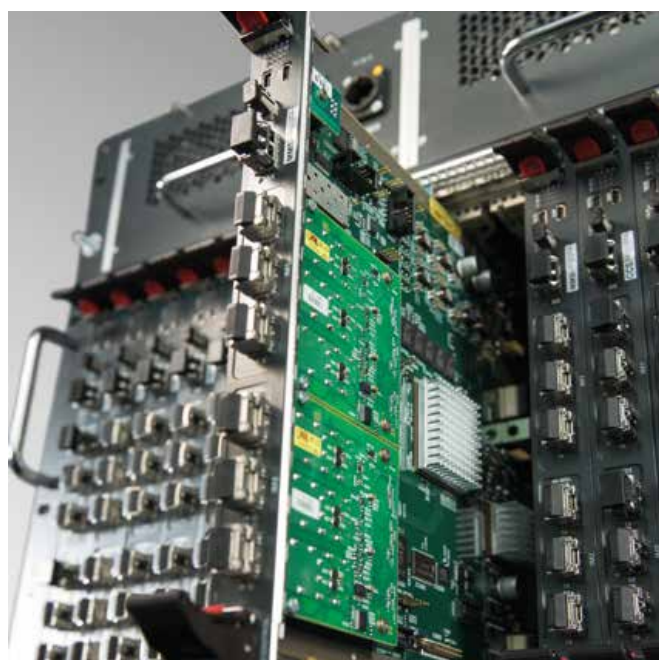

COMPANY OVERVIEW

EXPERTISE IN SOFTWARE, MECHANICS AND ELECTRONICS



INDUSTRY EXPERTISE: WE FOCUS ON THE APPLICATION

Our employees not only have profound technical specialist knowledge, they also have experience in numerous key industries such as industrial automation, aerospace and aeronautics, medical, energy, communications and transportation technology.

This means we have an in-depth understanding of your requirements – even if these are not always explicitly formulated.

INDUSTRIAL CONTROL



ENERGY



DEFENSE & AEROSPACE



MEDICAL



COMPANY OVERVIEW

EXPERTISE IN SOFTWARE, MECHANICS AND ELECTRONICS

QUALITY IS AT THE CORE OF OUR ACTIVITIES

Our products and services are based on established and certified processes, methods, and quality management systems. Additionally, we have industry-sector-specific process know-how.

Our skills in design and manufacturing the appropriate components and systems are confirmed by a range of certificates.



TRANSPORTATION



MEASUREMENT AND TEST



INFORMATION AND COMMUNICATION



| Certifications, Standards, Guidelines |
|--|
| ISO 9001 |
| EN ISO 13485 |
| EN ISO 14971 |
| EN 60601 |
| EN 62304 |
| DO-160, DO-178, DO-254 |
| NSQ 100 |
| EN 50155 |
| ETSI |
| NEBS |

COMPETENCE AND KNOW-HOW

Development of customer-specific systems

Manufacturing and testing of electronic products for batch sizes starting at quantity 1


Professional chassis technology from standard products to system solutions

We help you build the best system solutions

Our experience ranges from defining system architecture to developing and implementing individual components, through to manufacturing and integrating entire systems, throughout the entire life cycle of the systems in question. Coordinated processes guarantee excellent quality and provide the flexibility to adapt rapidly when new application requirements call for it. Our experienced employees have in-depth technical knowledge in their fields and understand the industry-specific requirements. Our design and manufacturing processes are coordinated with these requirements, and are audited and certified.

Our solutions minimize your design and production risks and can be applied to your product at lower cost and on time. We look after your products throughout their entire lifecycle. We strive to offer you the best system solution every time, one that will give you a lasting competitive edge.


Everything comes with the same quality objective – whether it's for a "simple" board or for a more complex system comprising hardware, software and chassis technology.

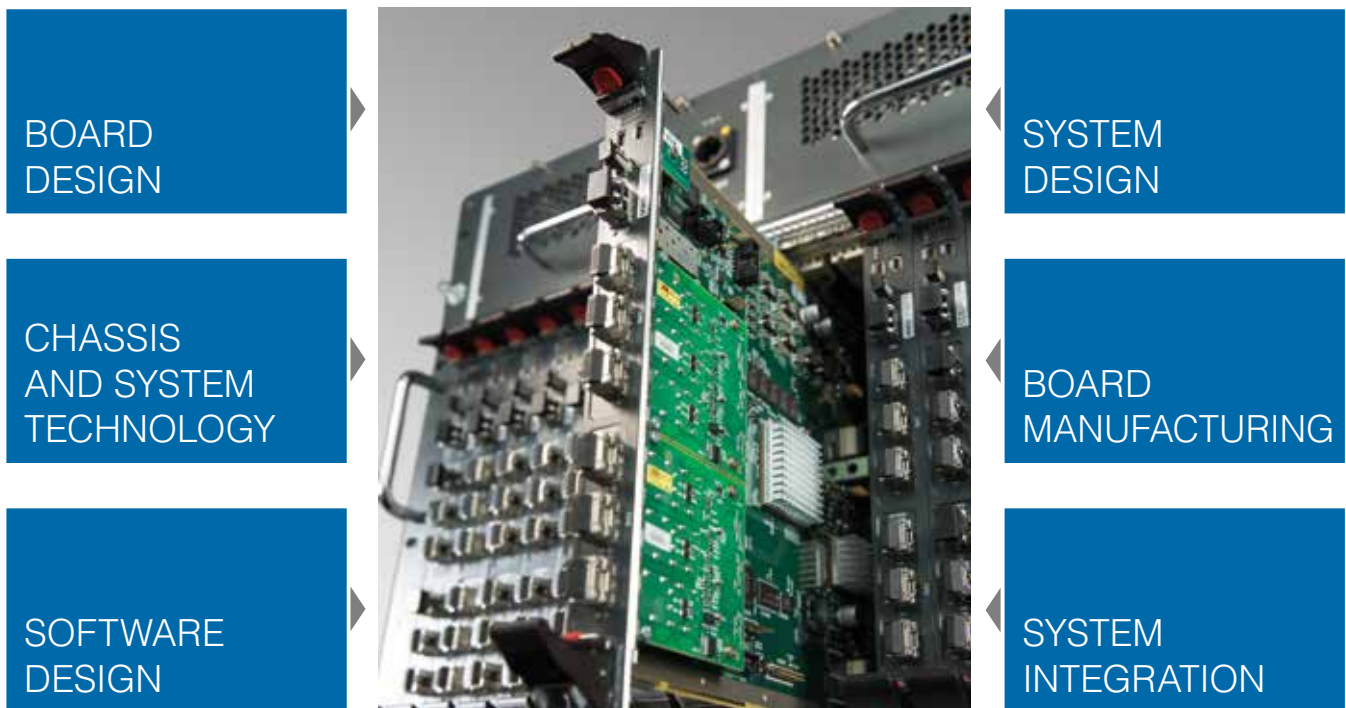



From idea to product: Expertise in tailor-made solutions

To turn your electronic product, which is often not more than a concept at first, into reality, you need reliable partners. We know all the steps and processes needed to make the transition from system design to prototyping, the necessary tests and inspections, through to series production. We know how important it is for design, manufacturing and service interfaces to mesh together. We create targeted industry applications with all the necessary certification. Whether it's electronic modules with the associated firmware, chassis systems in rail-mounted format or any kind of industrial PC for complex, high-availability systems, our teams will be there even after the project is completed to offer consulting, change management, after-sales service and long-term availability. HEITEC can provide everything from a single source – you maintain an overview of your projects and we provide the support and coordinate all the processes.

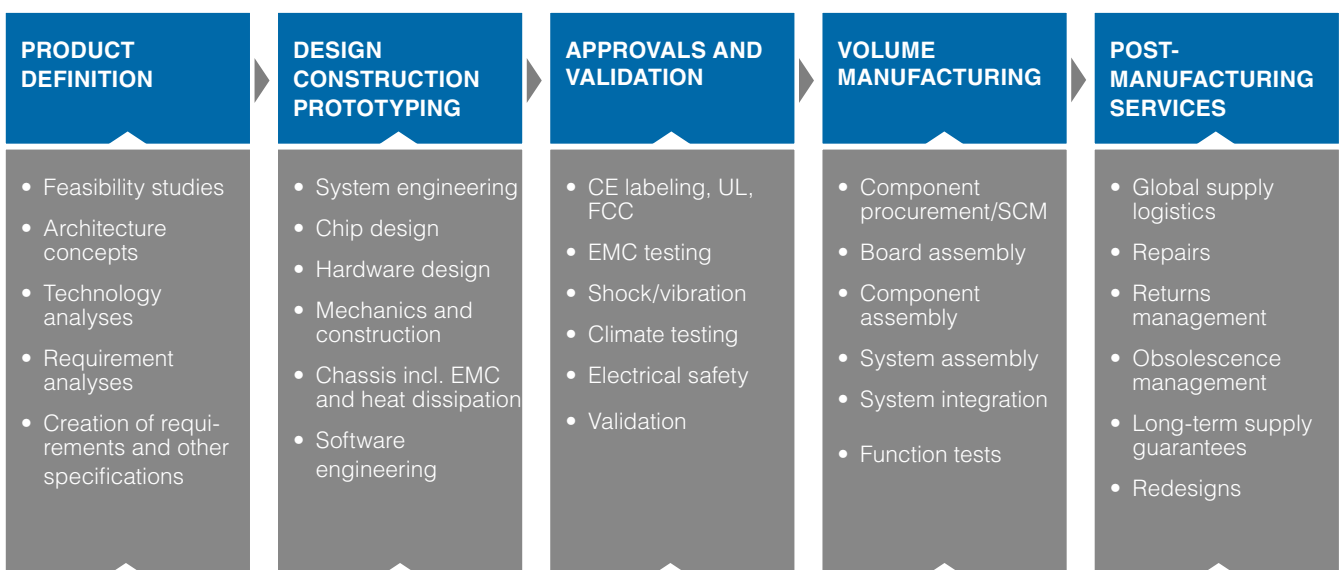

Use of building blocks:

- Library elements (software, mechanics and electronics)
- Wealth of experience from prior projects
- Chassis technology components and system platforms



**YOUR PARTNER FOR ELECTRONIC CHASSIS
AND SYSTEMS**

The current product portfolio offered by HEITEC AG in the area of electronic packaging systems and chassis is based originally on the corresponding product range from Rittal. Starting in early 2010, HEITEC has been steadily taking over this product range from Rittal and integrating it into its current range of products and services – constantly refining and expanding it.

2010

PRODUCT BRANDS



INTERNATIONAL SALES

**STANDARD CATALOG PRODUCTS
AND PRODUCT LINE OWNERSHIP**

**CUSTOMER-SPECIFIC
ELECTRONIC PACKAGING SYSTEMS
AND COMPONENTS**





CONSISTENCY AND CONTINUITY

HEITEC not only maintains the original Rittal part numbers but guarantees consistency, product longevity, supply chain security and continuous enhancement of its broad product range.

HEITEC was originally able to guarantee global customer support thanks to its partnership with Rittal subsidiaries abroad. Today, HEITEC has its own global network of sales partners that ensure customer support right around the world.

2013

2015

2016



In 2010, HEITEC took over Rittal's customer-specific products, followed by the complete product portfolio for electronic packaging systems, product line ownership and national sales in 2013. Starting in 2015, HEITEC began expanding its own global sales network of distribution and system integration partners in all key industrialised nations around the world. Lastly, in 2016, all product names and brands were changed over to the HEITEC range.

COMPANY OVERVIEW

PRODUCTS AND SERVICES

HEITEC's comprehensive portfolio of standard products and individual solutions gives you professional chassis technology – we “package” your electronics to suit your applications, every time.


We are constantly expanding this broad spectrum of chassis components, subracks, instrument cases and system enclosures as well as system platforms. We also offer individual adaptations to these products, in addition to special, customer-specific developments.

Selecting the right chassis technology is the basis for an efficient end product. Our skills lie in our many years of experience covering everything from mechanical

design to ensuring electromagnetic compatibility and effective heat dissipation concepts for highly complex systems. If you would prefer to take responsibility for the bulk of the system integration process yourself, you can order individual components, pre-assembled components or system enclosures from us to suit your requirements. If you prefer pre-integrated or fully integrated solutions, incorporating your own hardware and software if needed, we can provide a complete service through to a customer-specific system solution.

We support you in exactly those areas that match your business model best.

From components through to the complete system

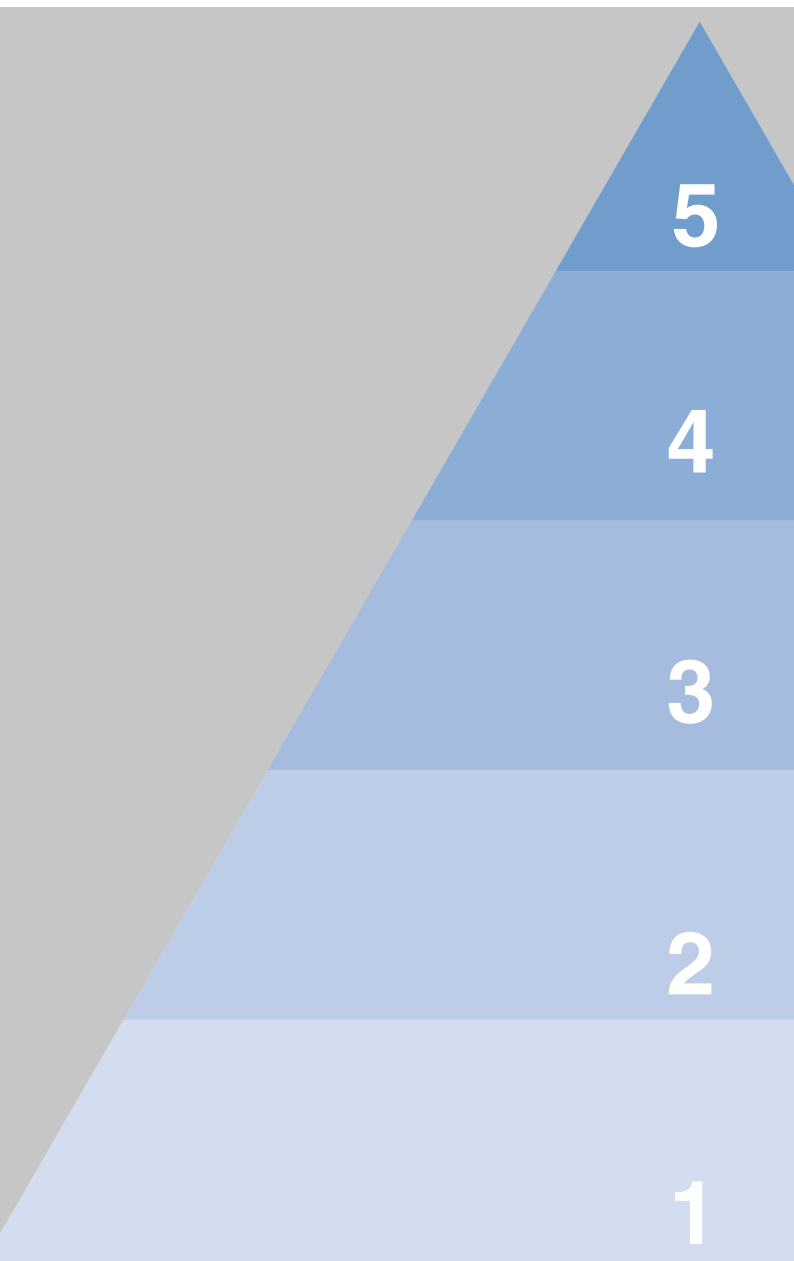



SYSTEM SOLUTION

Ready-to-use, fully integrated with hardware and software

PRE-INTEGRATED SYSTEMS

Partial or full integration of active modules and/or software

SYSTEM PLATFORMS

Chassis incl. ventilation/cooling, power supply, backplane

CHASSIS

Subracks, instrument cases and system enclosures, industrial PC, box-type plug-in units

COMPONENTS

Individual components and accessories
e.g. handles, front panels, EMC components

COMPANY OVERVIEW

PRODUCTS AND SERVICES

HEITEC is more than just a manufacturer of high-quality chassis solutions – it offers much more besides. Our highly flexible range of services maximizes customer benefit, even when low unit quantities are involved.

It doesn't matter if you want your preferred components assembled to suit your requirements, or if you need our experienced manufacturing staff to assemble all the mechanical, electrical and electronic components. We also strive to offer a long-term delivery capacity and delivery times to suit customer requirements.



Configuration

The wide range of variations available for chassis products means they can be combined easily and in many different ways

- Online configuration using the HEITEC subrack configurator
- Easy-to-follow product tables make it easy to put your desired product together

Assembly

HEITEC production facilities offer the latest in certified assembly and manufacturing options

- Skilled and reliable assembly, including final inspections, even for small unit quantities
- Assembly of individual parts, wiring, or even complete system configuration – depending on what the customer needs

Logistics


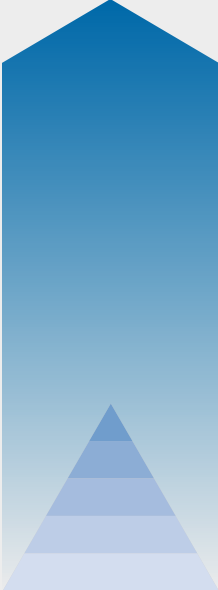





HEITEC's experienced logistics team can develop individual logistics plans to suit customer requirements

- Holding stocks of critical components for your project means HEITEC can guarantee a long-term delivery capacity
- HEITEC is a known Consignor that delivers worldwide

Customised adaptations and system solutions

HEITEC can provide adjustments from single-part level through to customer-specific system solutions

- Front panel processing, special colors for chassis and decorative elements
- Design and manufacturing of individual, ready-to-use system solutions

| | Individual | | 19-inch format |
|---|---|--|---|
| Ready-to-use system with integrated hardware and software, e.g. → Mobile charging station for cars |  |  |  |
| Subracks/chassis, e.g. → Small chassis → Din rail chassis |  | |  |
| Customised spare parts processing, e.g. → Front panel adaptations |  | |  |



Besides a multitude of standard products in this catalogue, we provide individual, tailor-made solutions.

Be it customer specific front panels – drilled, milled or printed according to your requirements, be it subracks, system enclosures or system configurations adapted to your application:

We create the appropriate product for you.

Please do not hesitate to contact our specialists.



TECHNOLOGY EXPERTISE



Overview of standards

Designs for electronic systems (dimensions for 19-inch design)

| | |
|-----------------|---|
| IEC 60297-3-100 | Basic dimensions of front panels, subracks, rack-mount systems, racks and cabinets |
| IEC 60297-3-101 | Subracks and assembly modules |
| IEC 60297-3-102 | Injector/extractor handle |
| IEC 60297-3-103 | Keying and guide pin |
| IEC 60297-3-104 | Connector dependent interface dimensions of subracks and assembly modules |
| IEC 60297-3-105 | Dimensions and layout of 1 U high rack-mount systems |
| IEC 60297-3-106 | Adaptation dimensions for subracks and rack-mount systems applicable with metric cabinets or racks in accordance with IEC 60917-2-1 |

Environmental conditions for designs as per IEC 60917, IEC 60297

| | |
|-------------------|---|
| DIN EN 61587-1 | Climatic and mechanic tests and safety aspects for cabinets, racks, subracks and rack-mount systems |
| DIN EN 61587-2 | Seismic tests for cabinets and racks |
| DIN EN 61587-3 | Electromagnetic shielding performance tests for cabinets and subracks |
| VG 95373, part 15 | Electromagnetic compatibility of equipment Part 15: Measuring method for coupling and shielding |

Safety

| | |
|-------------|---|
| IEC 60950-1 | Information Technology Equipment – Safety Part 1: General requirements |
|-------------|---|

Rail

| | |
|----------|--|
| EN 50155 | Electronic equipment used on rail vehicles |
|----------|--|

TECHNOLOGY EXPERTISE

19-INCH PACKAGING SYSTEM


19-inch technology: dimensional relationships

The 19" packaging system is based on internationally applicable dimensional standards that describe the coordinated, modular system structure. The various parts making up the IEC 60297 series of standards describes the mechanical structure of the system.


The objective of these provisions is to ensure that different devices and modules from all potential manufacturers can be combined and substituted without difficulty.

The 19" packaging system is now used in almost every area of industrial electronics: transportation, energy, IT and industrial control.

More specifically, the 19" packaging system can be divided into the following four levels:

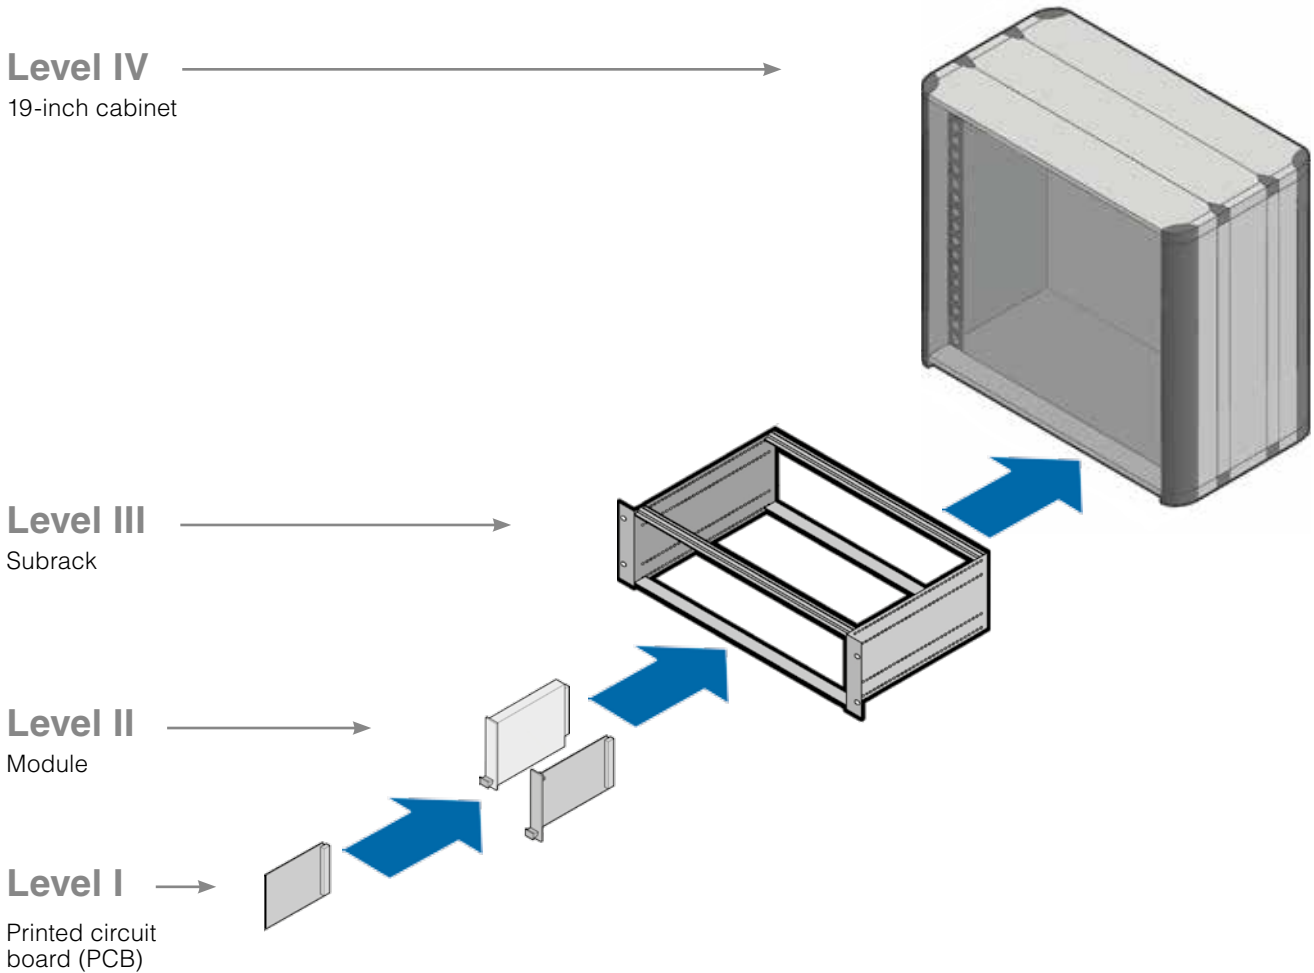

Level 1: Printed circuit board

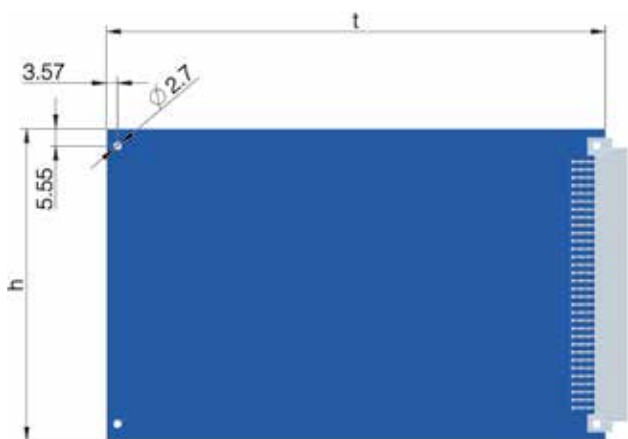

| Subrack height | PCB height h - 0.3 mm | PCB depth (mm) t - 0.3 mm | | | |
|----------------|--------------------------|------------------------------|--------|--------|--------|
| | | 100 mm | 160 mm | 220 mm | 280 mm |
| 3 U | 100 mm | - | x | x | - |
| 6 U | 233.35 mm | - | x | x | - |
| 9 U | 366.70 mm | - | x | x | - |


x most common dimensions

The PCB dimensions are defined on the basis of the eurocard format and are set forth in standard IEC 60297-3-101. Starting from a height of 100 mm and a depth of 160 mm as the basic dimensions, the height increases by multiples of one height unit (1 U = 44.45 mm) and the depth by multiples of 60 mm.

The table above shows the PCB formats most commonly used.

PCBs are generally 1.6 mm thick. Different, higher values must be coordinated between the user and the manufacturer to arrange suitable guide rails. Standard subrack depths are arranged in accordance with PCB depths of 160, 220 and 280 mm.

Level 2: Module

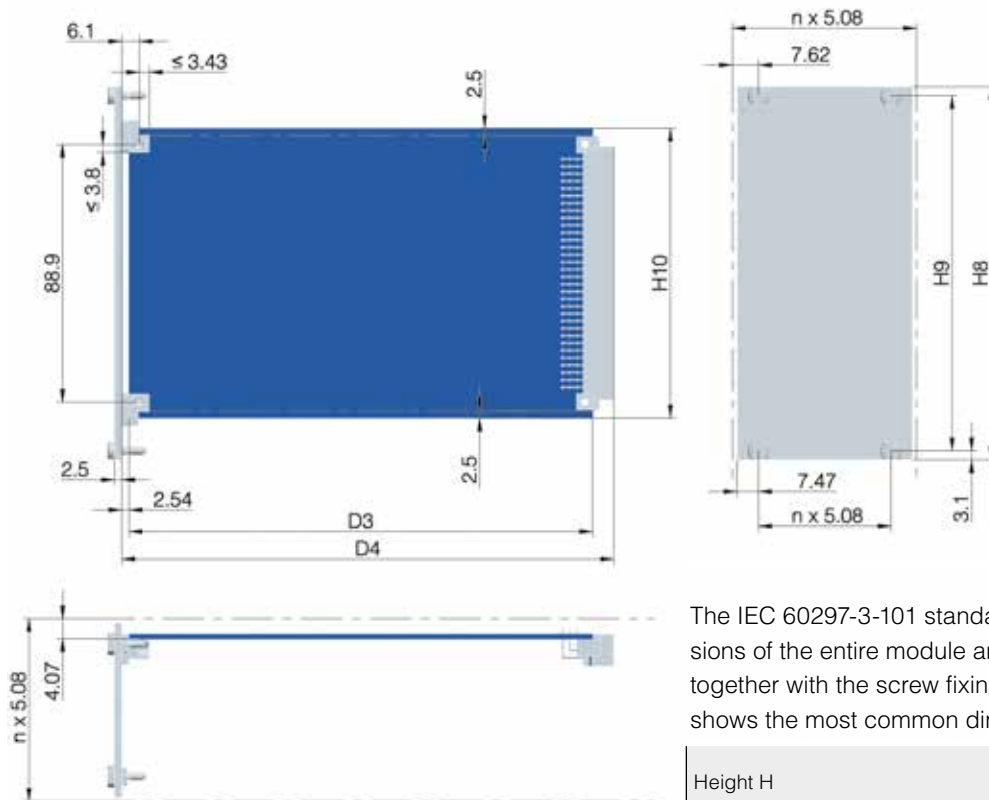


The IEC 60297-3-101 standard also describes the dimensions of the entire module and associated front panel, together with the screw fixing points. The following table shows the most common dimensions.

| Height H | | | | Depth D | | | |
|--------------|--------|--------|--------|-------------|--------|--------|--------|
| Height units | 3 U | 6 U | 9 U | Depth units | | | |
| H8 ± 0.15 | 128.55 | 261.9 | 395.25 | D1 ± 0.5 | 175.6 | 235.6 | 295.6 |
| H9 ± 0.2 | 122.5 | 255.85 | 389.2 | D3 - 0.3 | 160 | 180 | 220 |
| H10 +0 -0.3 | 100 | 233.35 | 366.7 | D4 ± 0.4 | 169.93 | 229.93 | 289.93 |

TECHNOLOGY EXPERTISE

19-INCH PACKAGING SYSTEM

Level 3: Subrack

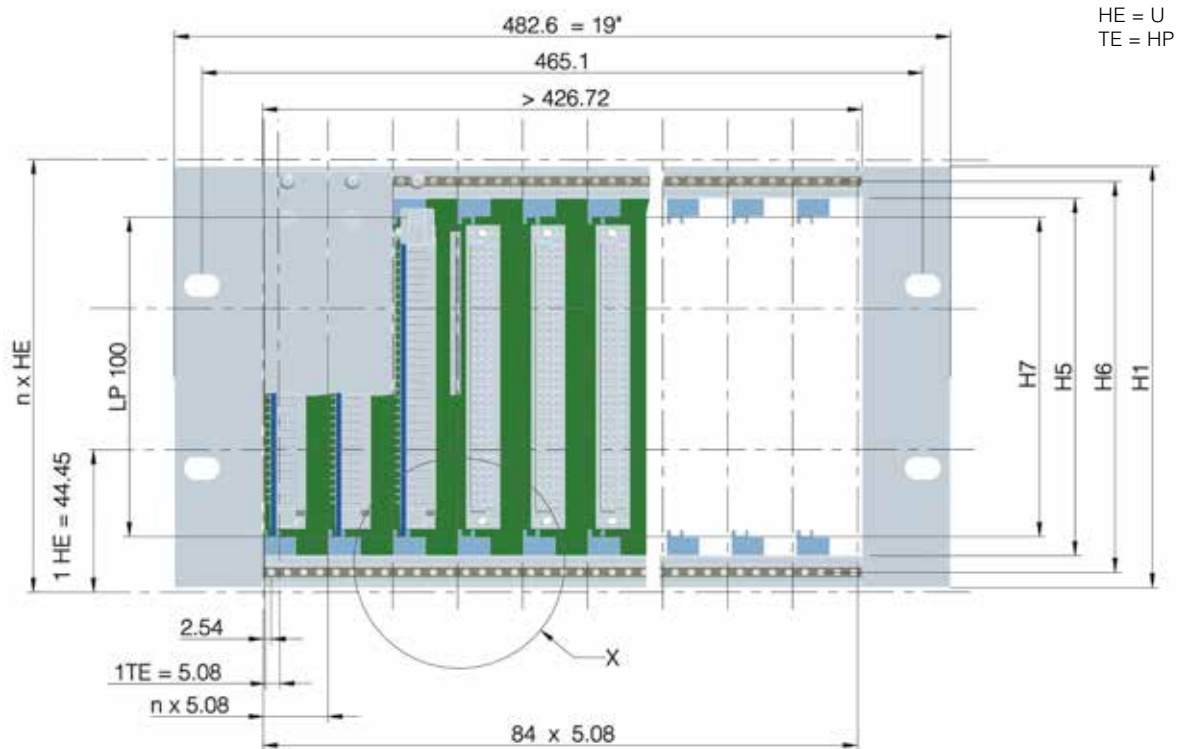

| Height units | 3 U | 6 U | 9 U |
|--------------|--------|--------|--------|
| H1 ± 0.4 | 132.55 | 265.90 | 399.25 |
| H5 ≥ | 112.00 | 245.35 | 378.70 |
| H6 ± 0.2 | 122.50 | 255.85 | 389.20 |
| H7 + 0.5 -0 | 100.20 | 233.55 | 366.90 |


DIN EN 60297-3-101 provides a figure of 482.6 mm (19 inches) for the width of the subrack front.

The maximum subrack height is given as a multiple of one height unit (1 U), or 44.45 mm. This ensures that the subrack height is coordinated with the height of the plug-in units used. Typical sizes are 3 U, 6 U and 9 U (refer to table).


The installation space for the modules is divided into horizontal pitch units (HP) of 5.08 mm (0.2 inch), or 84 HP for a subrack width of 19 inches.

Level 4: 19-inch cabinet

HE = U

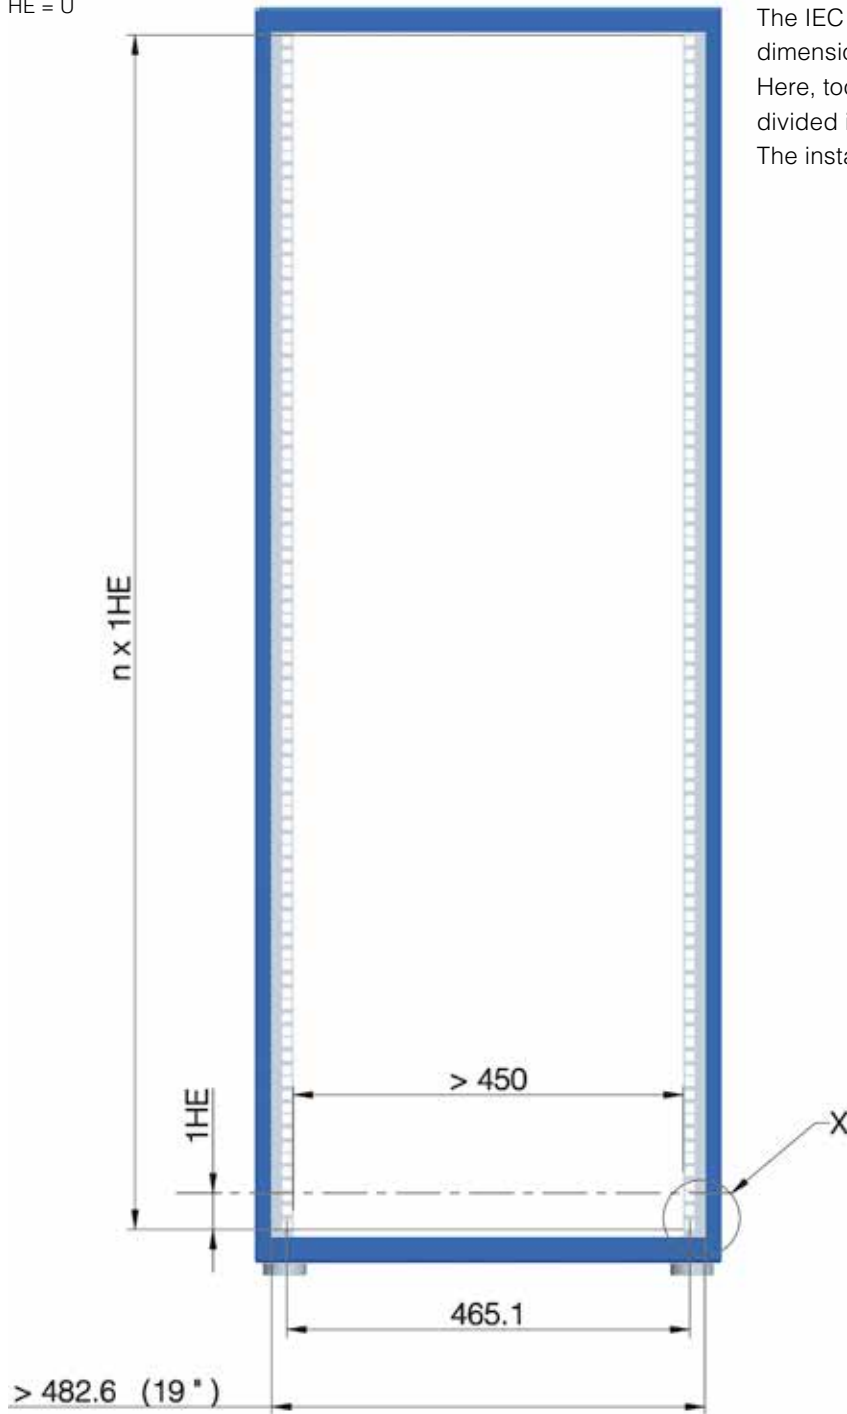


The IEC 60297-3-100 standard describes the basic dimensions of the 19-inch cabinet. Here, too, the space available to fit the subracks is divided into multiples of 1 U. The installation space must be at least 450 mm wide.

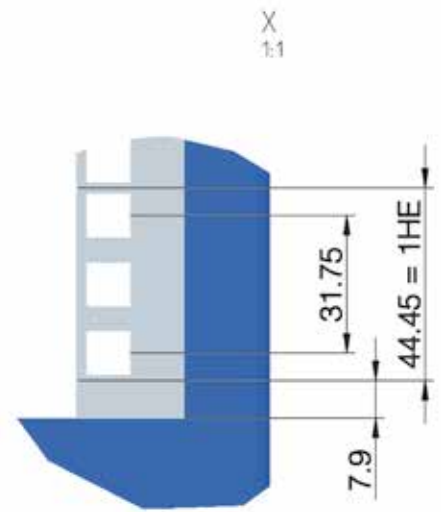

TECHNOLOGY EXPERTISE


19-INCH PACKAGING SYSTEM

Backplane

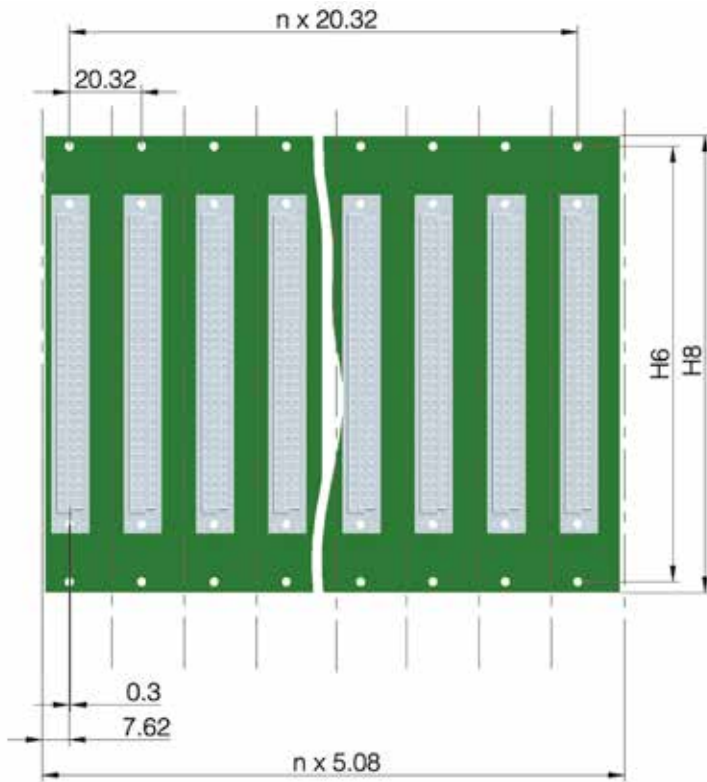

Backplane with plug connector as per
DIN 41612/IEC 60603-2 and IEC 61076-4-113

Typical application: VME/VME64 systems

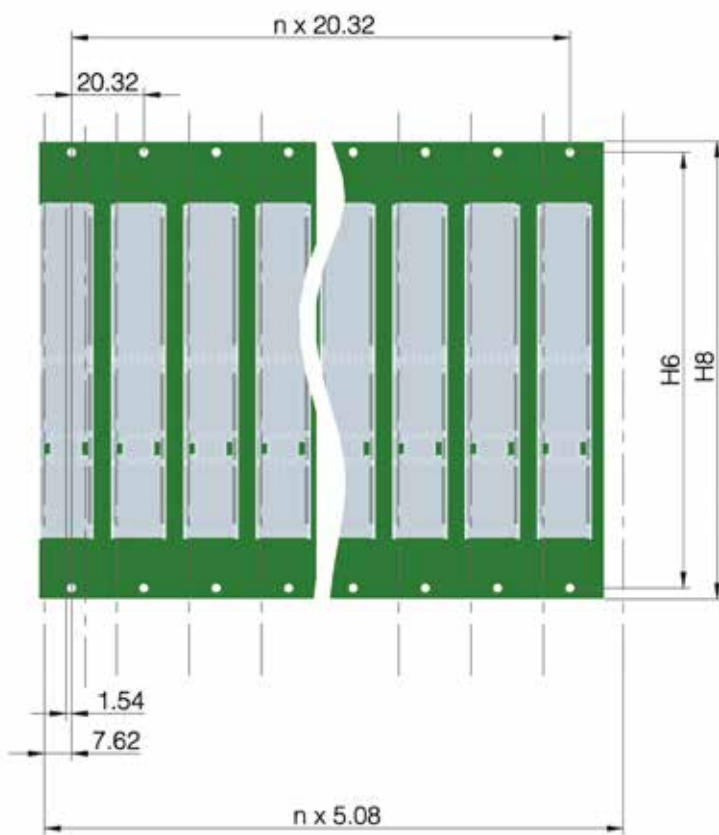

Backplane with plug connector as per
IEC 61076-4-101

Typical application: CPCI systems

The IEC 60297-3-104 standard describes the dimensions of the backplanes for the most common height variations (refer to table).

| Height units | 3 U | 6 U | 9 U |
|--------------|--------|--------|--------|
| H6 ± 0.2 | 122.50 | 255.85 | 389.20 |
| H8 ± 0.15 | 128.55 | 261.90 | 395.25 |

IP protection levels – chassis protection classes (IP code)



1st IP number

2nd IP number

Protection against solid objects

| | |
|---|--|
| 0 | No protection |
| 1 | Protected against solid objects over 50 mm in diameter |
| 2 | Protected against solid objects over 12.5 mm in diameter |
| 3 | Protected against solid objects over 2.5 mm in diameter |
| 4 | Protected against solid objects over 1.0 mm in diameter |
| 5 | Protected against dust (limited ingress, no harmful deposit) |
| 6 | Totally protected against dust |

Protection against contact


| | |
|---|---|
| 0 | No protection |
| 1 | Protected against contact with back of hand |
| 2 | Protected against contact with fingers |
| 3 | Protected against tools |
| 4 | Protected against wires |
| 5 | Complete protection against contact |
| 6 | Complete protection against contact |

Protection against liquid

| | |
|---|---|
| 0 | No protection |
| 1 | Protected against vertically falling drops of water, e.g. condensation |
| 2 | Protected against direct sprays of water up to 15 degrees from vertical |
| 3 | Protected against sprays up to 60 degrees from vertical |
| 4 | Protected against water sprayed from all directions |
| 5 | Protected against low-pressure jets of water from all directions |
| 6 | Protected against strong jets of water |
| 7 | Protected against the effects of short-term immersion |
| 8 | Protected against long periods of immersion |

TECHNOLOGY EXPERTISE PROTECTION REQUIREMENTS

Electromagnetic compatibility (EMC)

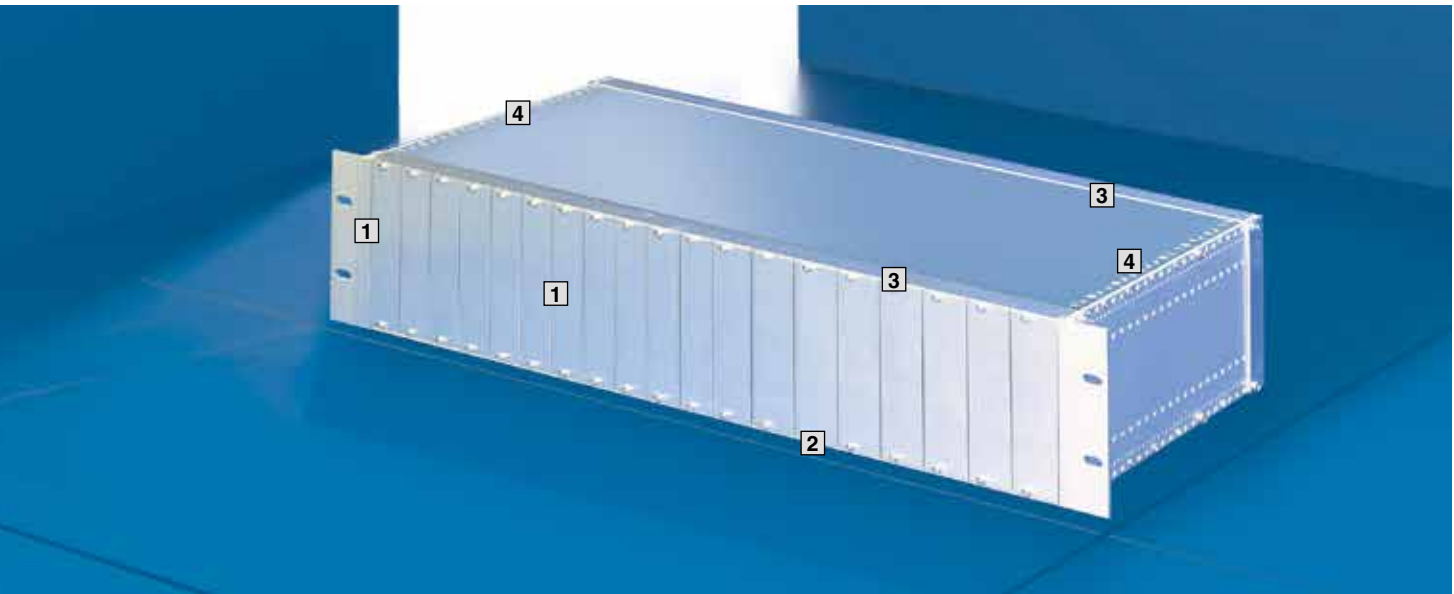

- 1 EMC gaskets, vertical
- 2 EMC gaskets, horizontal
- 3 EMC gaskets for cover plates
- 4 Mounting blocks


EMC (electromagnetic compatibility) refers to the ability of an electrical device to function satisfactorily in its electromagnetic environment without influencing this environment more than is admissible. These requirements were taken into account when developing the HEITEC subracks.

They are made entirely from metal and coated with a conductive surface finish. Stainless steel EMC gaskets ensure a conductive connection between the separate parts.

Testing of measurements of the shielding effectiveness of empty chassis is based on DIN EN 61587-3 or military standards, e.g. MIL STD 285 (US) or VG 95373 Part 15 (GER).

International EMC standards are published mainly by IEC (International Electrotechnical Commission) and CISPR (International Special Committee on Radio Interference).

Key series of EMC standards with global importance: IEC 61000

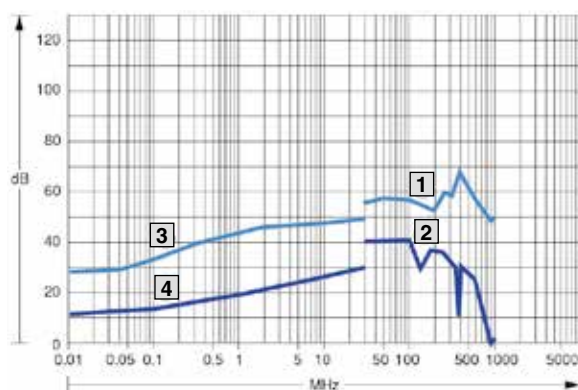


- MHz = frequency
- dB = HF attenuation
- 1 E-Field = electric field (V/m)
EMC chassis
- 2 E-Field standard chassis
- 3 H-Field = magnetic field (A/m)
EMC chassis
- 4 H-Field standard chassis

The above diagram shows the extent to which EMC shielding influences the attenuation of the electromagnetic field. The attenuation of a standard chassis with no suitable EMC components is thus much lower than that of a HeiPac Vario EMC subrack.

Of particular interest is the shielding factor provided by the attenuation.


| HF attenuation (dB) | Shielding (%) |
|---------------------|---------------|
| 6 | 50 |
| 20 | 90 |
| 40 | 99 |
| 60 | 99.9 |

Screws

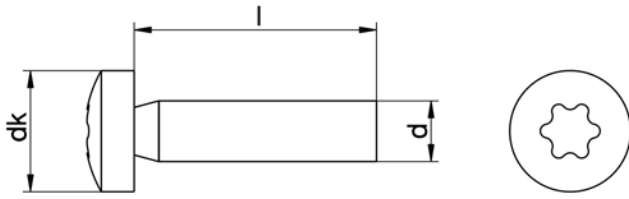


Screws are used to achieve a tight connection between two or more components. They form part of a screw gear consisting of two standardised, paired components. Friction on the wedge-shaped thread under load prevents the screws from coming loose.

Examples

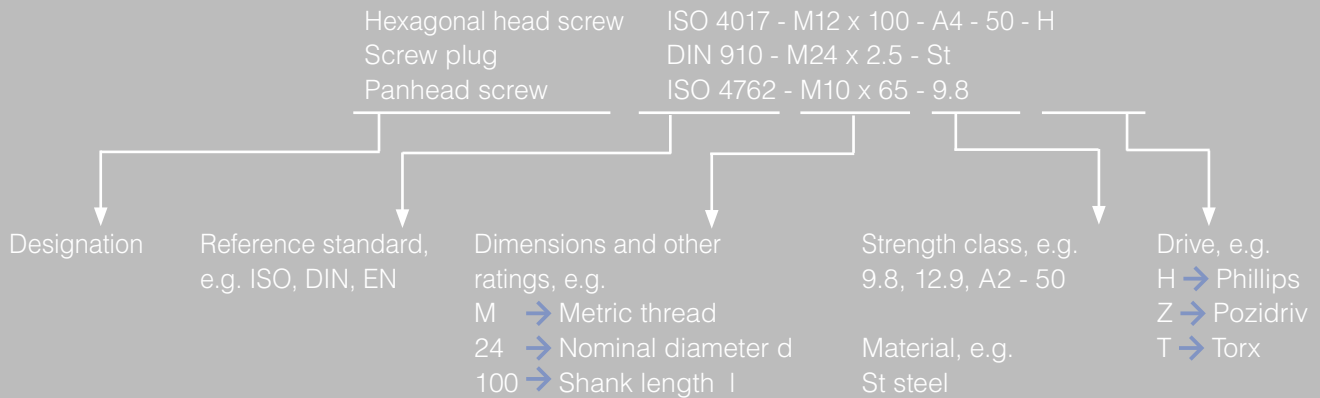


Nuts

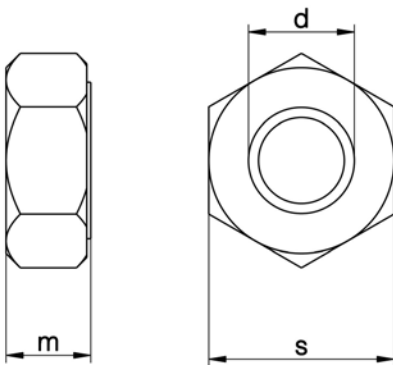

Nuts are the counterpart to the screws. They have a standardised inside thread that matches the thread of the screw. The prismatic outside contour is shaped to accommodate a wrench, which is used to tighten the nut. In terms of dimensions, the height of a nut is approximately half the width across the flats.

Examples

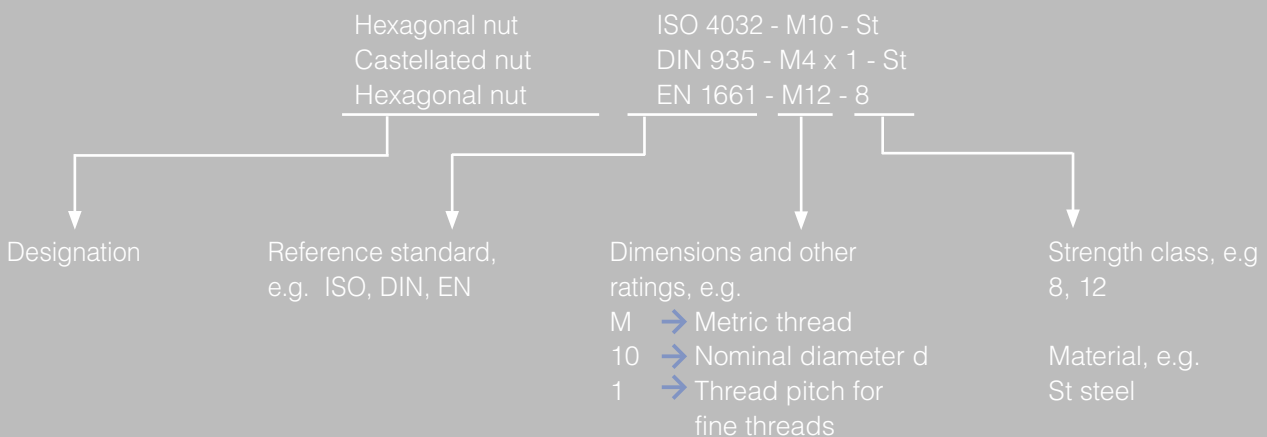

HeiPac subrack systems

A minimum of components – a multitude of applications

SUBRACKS

The modular concept of HeiPac subracks facilitates a wide range of application options with a minimum of components.

All HeiPac subracks are based on the same horizontal rails and system components. The difference lies in the design of the side panels and installation options. The only exception is the HeiPac EASY subrack system, which is based on a horizontal rail system of its own. All front systems can be universally applied for all subrack families.

The subracks are shock and vibration-tested and comply with IEC 60 297-3-101, 102 and 103.

HeiPac Vario



Universal 19" subrack system

- Varied size range
- Flexible design options
- A wealth of accessories
- EMC screening optional

→ Page 30

HeiPac Vario EMV



Universal 19" subrack system for EMC applications

- Varied size range
- Flexible design options
- A wealth of accessories
- EMC screening

→ Page 30

HeiPac Vario ECO



Economical 19" subrack system

- Available in standard sizes
- A wealth of accessories
- EMC screening optional

→ Page 58

HeiPac Vario Compact



Compact subrack system in 21 HP and 42 HP

- For rail or wall mounting
- A wealth of accessories
- EMC screening optional

→ Page 66

HeiPac Vario HEAVY



Sturdy 19" subrack system for mobile use

- Increased mechanical strength
- Certified for use in railway applications as per EN 50155
- A wealth of accessories
- EMC screening optional

→ Page 76

HeiPac EASY



Economical, sturdy 19" subrack system

- Bolts pre-assembled
- A wealth of accessories
- Very easy to assemble

→ Page 82

SUBRACKS

HeiPac Vario / Vario EMC



For standard applications/EMC applications or complex installations

Applications


Subrack system for standard applications or complex installations. Suitable for installation of standardised PCBs or plug-in units up to 400 mm depth.

Technical specifications

- 482.6 mm (19") subrack according to IEC 60 297-3
- 3, 4, 6, 7 and 9 U
- For board depths up to 400 mm
- Side panels of aluminium, clear-chromated
- 10 mm mounting grids for horizontal rails
- Rear equipment for installation of backplanes or connectors
- Separate 19" flanges
- EMC version including EMC gaskets

Benefits at a glance

- Side panels with 10 mm mounting grid
- The HeiPac Vario is upgradeable to EMC
- 19" flanges optionally for front/rear mounting
- Wide range of standard sizes
- For installation of backplanes or connectors
- Broad range of accessories

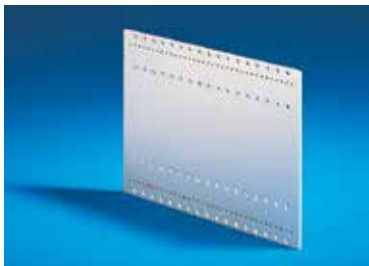


10 mm pitch pattern of holes allows many varieties



Components made of solid aluminium alloy




Contact springs made of stainless steel provide high EMC protection

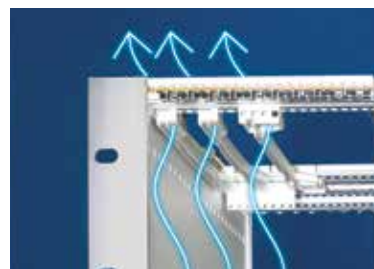


Effective heat dissipation due to open design

EMC diagram for HeiPac Vario/Vario EMC

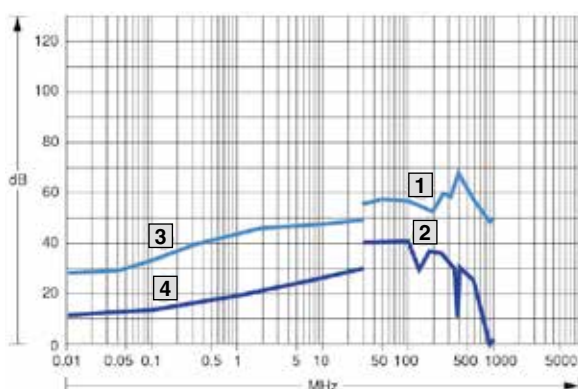

- MHz = Frequency
- dB = HF-attenuation
- 1** E-Field = Electric field (V/m)
EMC subrack
- 2** E-Field standard subrack
- 3** H-Field = Magnetic field (A/m)
EMC subrack
- 4** H-Field standard subrack

HeiPac Vario 3 U, 6 U, 9 U

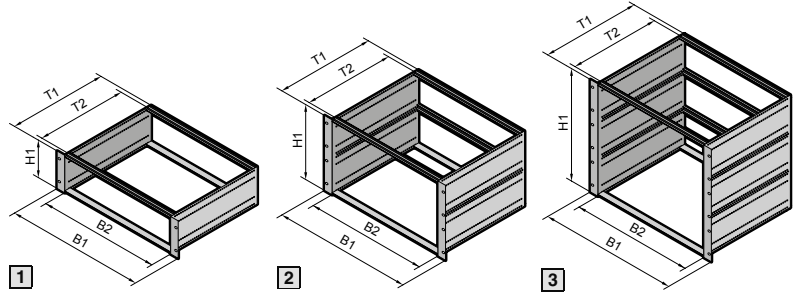

Material/surface finish

Side panels: 2.5 mm aluminium, clear-chromated
 Horizontal rails: Extruded aluminium section, clear-chromated
 19" flanges: Extruded aluminium section, clear-chromated

Supply includes

Flanges, side panels, horizontal rails, threaded inserts, insulating strips or Z rails.

Tests


Shock and vibration tested to:
 IEC 600-68-2-6 test Fc
 IEC 600-68-2-6 test Ea

Standards

HeiPac subracks are based on the system dimensions of IEC 60 297-3

Note

Upgradeable to EMC

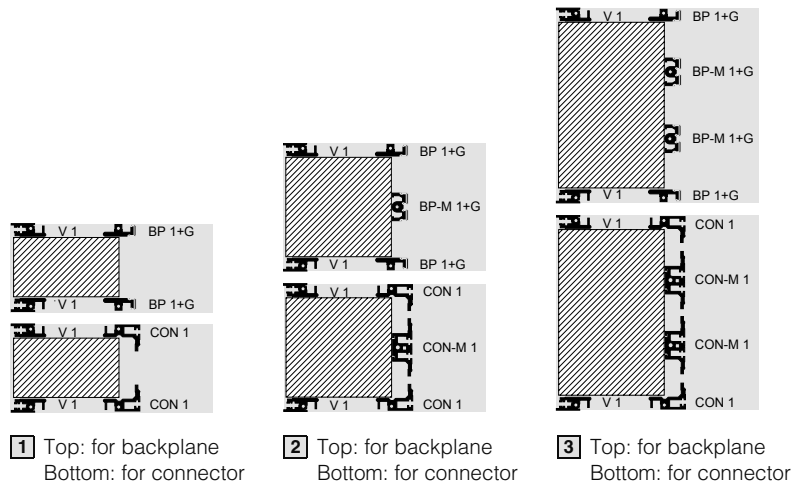

1 Top: for backplane Bottom: for connector
 2 Top: for backplane Bottom: for connector
 3 Top: for backplane Bottom: for connector

| | | | | | Order No. | | | | | |
|----------------|-------|--------------------|-------|-------------------|-----------------|----------------------------|-----------------|----------------------------|-----------------|----------------------------|
| | | | | | 1 | | 2 | | 3 | |
| U | | | | | 3 | | 6 | | 9 | |
| Height (H1) mm | | | | | 132 | | 265.35 | | 398.70 | |
| B1 mm | B2 HP | Side panel (T1) mm | T2 mm | Max. PCB depth mm | For backplane | For connector IEC 60 603-2 | For backplane | For connector IEC 60 603-2 | For backplane | For connector IEC 60 603-2 |
| 482.6 (19") | 84 | 185 | 160 | 160 | 3684.020 | 3684.034 | 3684.043 | 3684.056 | - | - |
| | | 225 | 200 | 160 | 3684.021 | 3684.035 | 3684.044 | 3684.057 | - | - |
| | | 245 | 220 | 220 | 3684.022 | 3684.036 | 3684.045 | 3684.058 | - | - |
| | | 285 | 260 | 220 | 3684.023 | 3685.281 | 3684.046 | - | - | - |
| | | 305 | 280 | 280 | 3685.231 | 3685.233 | 3685.238 | 3685.240 | - | - |
| | | 345 | 320 | 280 | 3684.024 | - | 3684.047 | - | 3684.051 | 3684.059 |
| | | 365 | 340 | 340 | 3685.232 | 3685.234 | 3685.239 | - | - | - |
| | | 405 | 380 | 340 | 3684.025 | - | 3684.048 | - | 3684.052 | 3684.060 |
| | | 465 | 440 | 400 | 3684.026 | - | 3684.049 | - | 3684.053 | 3684.061 |
| | | 525 | 500 | 400 | 3684.027 | - | 3684.050 | - | 3684.054 | - |
| 585 | 560 | 400 | - | - | - | - | 3684.055 | - | | |

Other customised subrack solutions are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

SUBRACKS

HeiPac Vario

HeiPac Vario 4 U, 7 U



Material/surface finish

Side panels: 2.5 mm aluminium, clear-chromated
 Horizontal rails: Extruded aluminium section, clear-chromated
 19" flanges: Extruded aluminium section, clear-chromated

Supply includes

Flanges, side panels, horizontal rails, threaded inserts, insulating strips or Z rails.

Tests



Shock and vibration tested to:
 IEC 600-68-2-6 test Fc
 IEC 600-68-2-6 test Ea

Standards

HeiPac subracks are based on the system dimensions of IEC 60 297-3

Note

Upgradeable to EMC

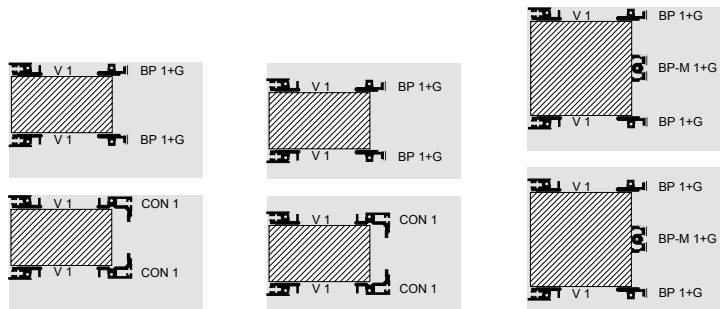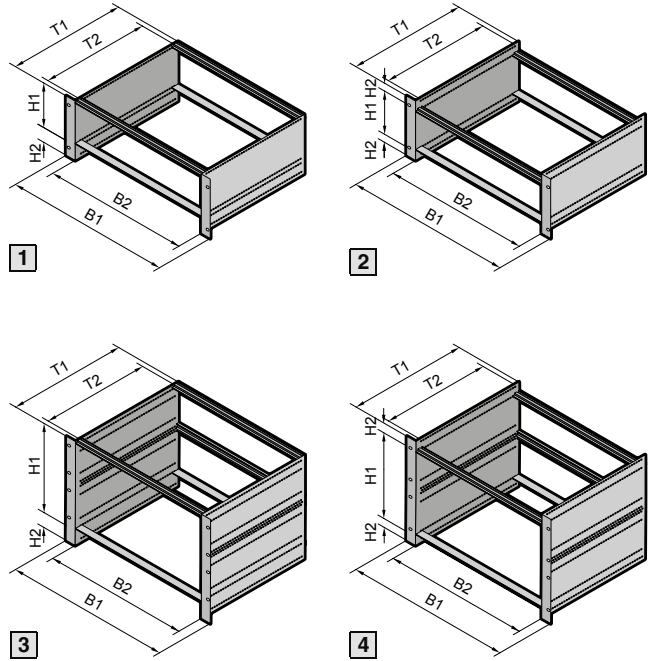


- 1** Top: for backplane
Bottom: for connector
- 2** Top: for backplane
Bottom: for connector
- 3** Top: for backplane (6 U + 1 U)
- 4** Bottom: for backplane (6 U + 2 x 1/2 U)

| | | | | | Order No. | | | | | |
|-----------------------|----------|-----------------------|----------|-------------------------|----------------------------|-------------------------------|----------------------------------|----------------------------------|----------------------------|----------------------------------|
| | | | | | 1 | | 2 | | 3 | 4 |
| U (H1 + H2) | | Side panel (T1) mm | T2 mm | Max. PCB depth mm | 4 (3 + 1) | 4 (3 + 1) | 4 (3 + 2 x 1/2) | 4 (3 + 2 x 1/2) | 7 (6 + 1) | 7 (6 + 2 x 1/2) |
| B1 mm | B2 HP | | | | For backplane | For connector IEC 60 603-2 | For backplane | For connector IEC 60 603-2 | For backplane | For backplane |
| 482.6 (19") | 84 | 245 | 220 | 220 | 3685.235 | - | - | - | - | - |
| | | 285 | 260 | 220 | 3684.028 | 3684.037 | 3684.031 | 3684.040 | - | - |
| | | 305 | 280 | 280 | 3685.236 | - | - | - | - | - |
| | | 345 | 320 | 280 | 3684.029 | 3684.038 | 3684.032 | 3684.041 | - | - |
| | | 365 | 340 | 340 | 3685.237 | - | - | - | - | - |
| | | 405 | 380 | 340 | 3684.030 | 3684.039 | 3684.033 | 3684.042 | 3684.064 | 3684.062 |
| | | 465 | 440 | 400 | - | - | - | - | 3684.065 | 3684.063 |

Other customised subrack solutions are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

HeiPac Vario EMC 3 U, 6 U, 9 U

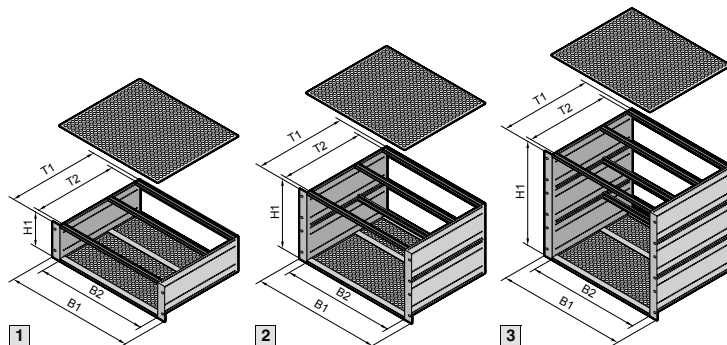

EMC

Material/surface finish

Side panels: 2.5 mm aluminium, clear-chromated
 Horizontal rails: Extruded aluminium section, clear-chromated
 19" flanges: Extruded aluminium section, clear-chromated
 Covers: Aluminium, unplated

Supply includes


Flanges, rear trim, side panels, EMC gaskets, covers, mounting blocks, horizontal rails, threaded inserts, insulating strips

Tests

Shock and vibration tested to:
 IEC 600-68-2-6 test Fc
 IEC 600-68-2-27 test Ea

Standards

HeiPac subracks are based on the system dimensions of IEC 60 297-3

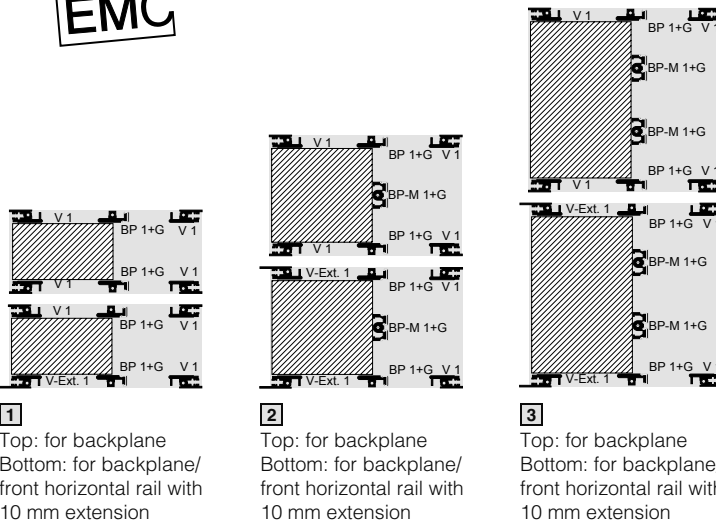

| | | | | | Order No. | | | | | |
|-----------------------|-------|--------------------|-------|-------------------|-----------------|-----------------------------|-----------------|-----------------------------|-----------------|-----------------------------|
| | | | | | 1 | | 2 | | 3 | |
| U | | | | | 3 | | 6 | | 9 | |
| Height (H1) mm | | | | | 132 | | 265.35 | | 398.70 | |
| B1 mm | B2 HP | Side panel (T1) mm | T2 mm | Max. PCB depth mm | For backplane | For backplane ¹⁾ | For backplane | For backplane ¹⁾ | For backplane | For backplane ¹⁾ |
| 482.6 (19") | 84 | 245 | 220 | 160 | 3684.128 | 3684.142 | 3684.156 | 3684.169 | - | - |
| | | 285 | 260 | 220 | 3684.129 | 3684.143 | 3684.157 | 3684.170 | - | - |
| | | 305 | 280 | 220 | 3685.241 | 3685.243 | 3685.242 | 3685.244 | - | - |
| | | 345 | 320 | 280 | 3684.130 | 3684.144 | 3684.158 | 3684.171 | 3684.162 | 3684.175 |
| | | 405 | 380 | 340 | 3684.131 | 3684.145 | 3684.159 | 3684.172 | 3684.163 | 3684.176 |
| | | 465 | 440 | 400 | 3684.132 | 3684.146 | 3684.160 | 3684.173 | 3684.164 | 3684.177 |
| | | 525 | 500 | 400 | 3684.133 | 3684.147 | 3684.161 | 3684.174 | 3684.165 | 3684.178 |
| | | 585 | 560 | 400 | - | - | - | - | 3684.166 | 3684.179 |

¹⁾ Front horizontal rails with 10 mm extension for injector/extractor handles

Other customised subrack solutions are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

SUBRACKS

HeiPac Vario EMC

HeiPac Vario EMC 4 U, 7 U



Material/surface finish

Side panels: 2.5 mm aluminium, clear-chromated
 Horizontal rails: Extruded aluminium section, clear-chromated
 19" flanges: Extruded aluminium section, clear-chromated
 Covers: Aluminium, unplated

Supply includes


Flanges, rear trim, side panels, EMC gaskets, covers, mounting blocks, horizontal rails, threaded inserts, insulating strips

Tests


Shock and vibration tested to:
 IEC 600-68-2-6 test Fc
 IEC 600-68-2-27 test Ea

Standards

HeiPac subracks are based on the system dimensions of IEC 60 297-3

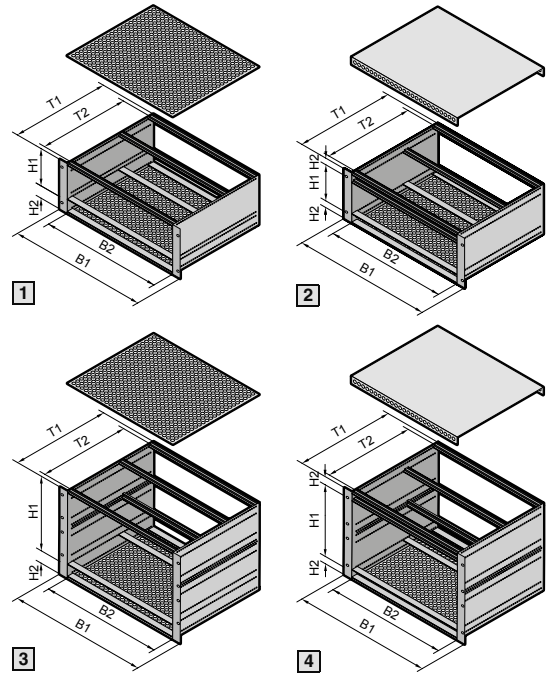

EMC

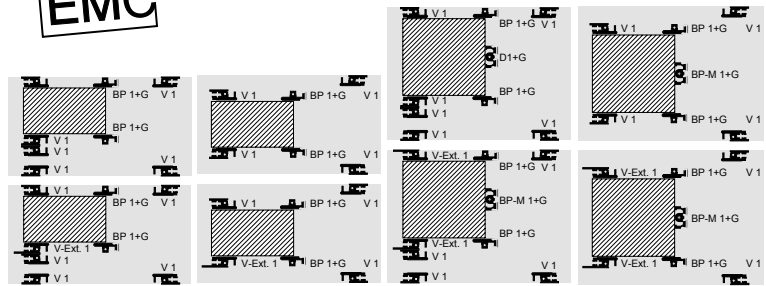

1 Top: for backplane
bottom: for backplane/
front horizontal rail with
10 mm extension

2 Top: for backplane
bottom: for backplane/
front horizontal rail with
10 mm extension

3 Top: for backplane
bottom: for backplane/
front horizontal rail with
10 mm extension

4 Top: for backplane
bottom: for backplane/
front horizontal rail with
10 mm extension

| | | | | | Order No. | | | | | | | |
|---------------------|----------|-----------------------|----------|-------------------------|----------------------------|--------------------------------|----------------------------------|----------------------------------|----------------------------|--------------------------------|----------------------------------|----------------------------------|
| | | | | | 1 | | 2 | | 3 | | 4 | |
| U (H1+H2) | | | | | 4 (3 + 1) | 4 (3 + 1) | 4 (3 + 2 x 1/2) | 4 (3 + 2 x 1/2) | 7 (6 + 1) | 7 (6 + 1) | 7 (6 + 2 x 1/2) | 7 (6 + 2 x 1/2) |
| B1 mm | B2 HP | Side panel (T1) mm | T2 mm | Max. PCB depth mm | For backplane | For backplane ¹⁾ | For backplane | For backplane ¹⁾ | For backplane | For backplane ¹⁾ | For backplane | For backplane ¹⁾ |
| 482,6 (19") | 84 | 285 | 260 | 220 | 3684.134 | 3684.148 | 3684.137 | 3684.151 | 3684.187 | 3684.192 | - | - |
| | | 345 | 320 | 280 | 3684.135 | 3684.149 | 3684.138 | 3684.152 | 3684.188 | 3684.193 | 3684.189 | 3684.196 |
| | | 405 | 380 | 340 | 3684.136 | 3684.150 | 3684.139 | 3684.153 | 3684.180 | 3684.194 | 3684.190 | 3684.197 |
| | | 465 | 440 | 400 | - | - | - | - | 3684.181 | 3684.195 | 3684.191 | 3684.198 |

¹⁾ Front horizontal rails with 10 mm extension for injector/extractor handles

Other customised subrack solutions are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

Components, accessories and services for HeiPac Vario

In addition to the presented subrack-kits, we offer components and accessories for your individual configuration on the following pages


WE MEET YOUR INDIVIDUAL NEEDS!

You are looking for a product in the field of electronic packaging that is not in our catalogue? Please contact us! Due to our extensive range of services we can meet all your demands.







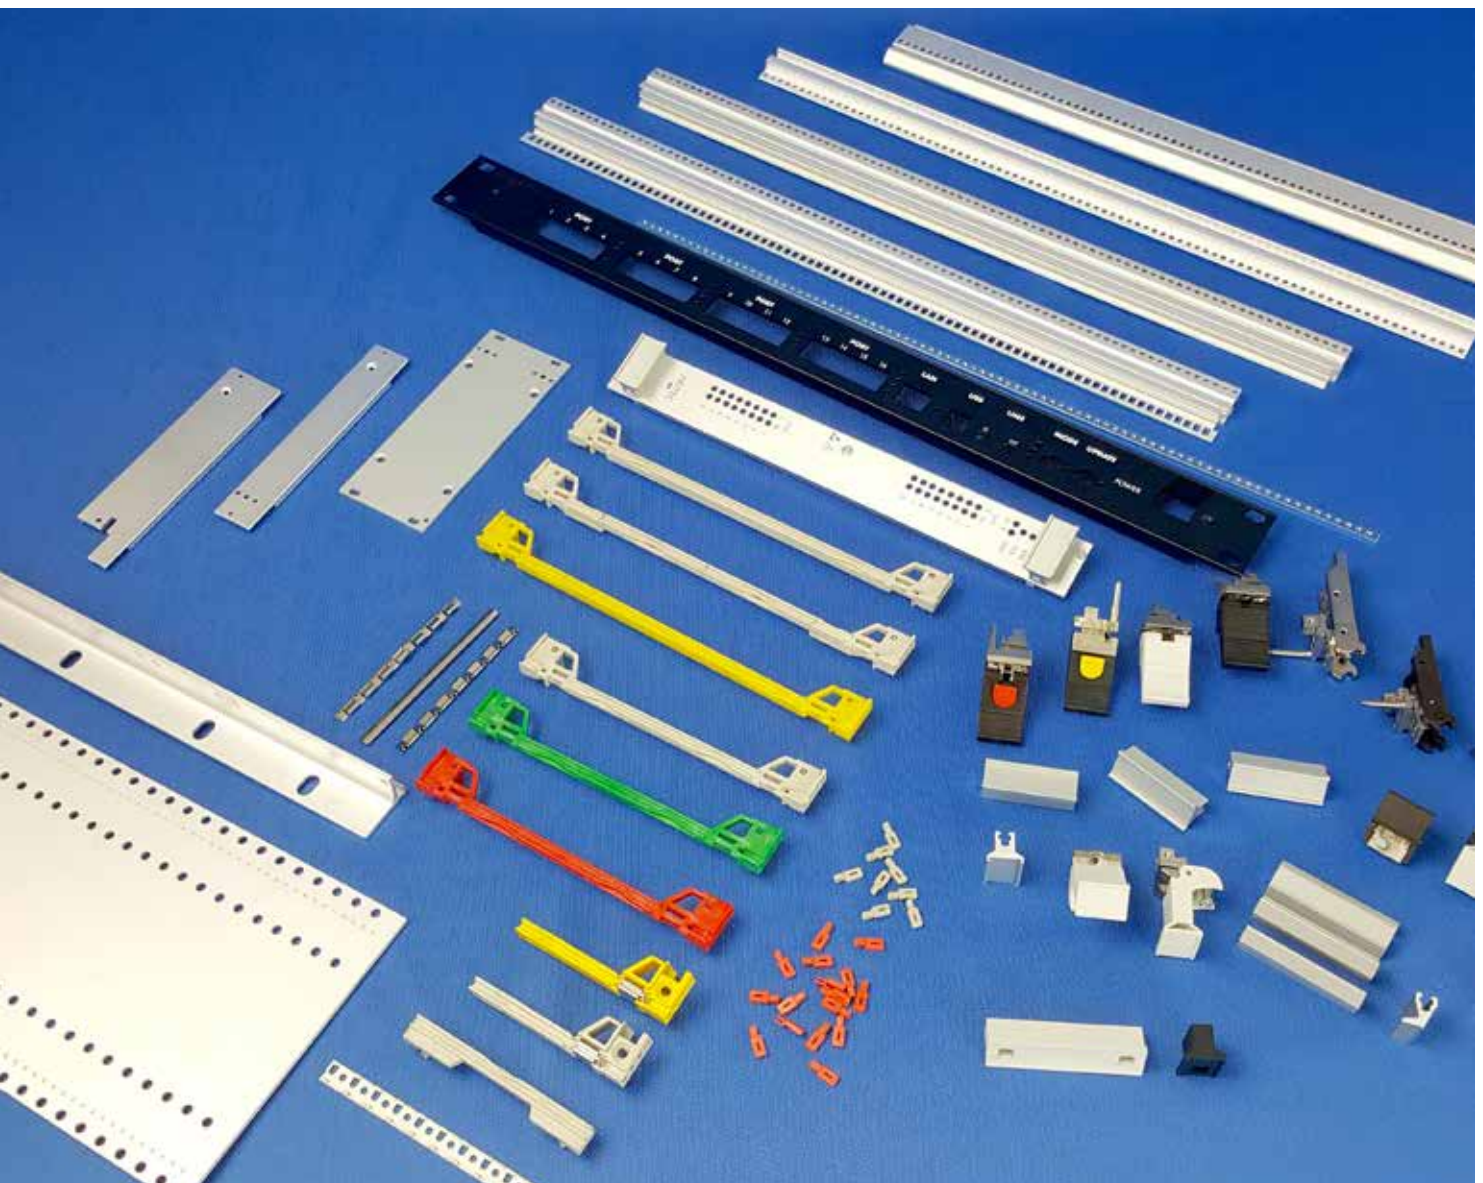







































We will gladly submit a tailored quotation.

Phone: 09126 - 29 34 0

E-Mail: eps-quote@heitec.de






Overview horizontal rails HeiPac Vario

































| Main sections | V 1 Front horizontal rail | V 2 Front horizontal rail, with double screw fastening | V 3 Double front horizontal rail | V-Ext. 1 Front horizontal rail, with 10 mm extension, for extractor handle type IV or VII | V-Ext. 2 Double front horizontal rail, with 10 mm extension | V-Ext. 3 Front horizontal rail, with 10 mm extension, with double screw fastening | V-Ext. 4 Double front horizontal rail, with 10 mm extension | BP 1 Rear horizontal rail | BP 2 Rear horizontal rail, with double screw fastening |
|--|---|---|---|--|---|--|---|---|---|
| | Page 38 | Page 38 | Page 39 | Page 39 | Page 40 | Page 40 | Page 41 | Page 41 | Page 42 |
| Additional sections |  |  |  |  |  |  |  |  |  |
| E Adaptor rail, rear centre, to accommodate guide rails  | - | - | - | - | - | - | - | - | - |
| Page 140 | | | | | | | | | |
| F Z rail for connector  | - | - | - | - | - | - | - |  |  |
| Page 144 | | | | | | | | | |
| G Insulating strip ¹⁾  | - | - | - | - | - | - | - |  |  |
| Page 145 | | | | | | | | | |
| H Conductive strip ²⁾  | - | - | - | - | - | - | - |  |  |
| Page 145 | | | | | | | | | |
| I Threaded insert  |  |  |  |  |  |  |  | - |  |
| Page 144 | | | | | | | | | |
| J Identification strips  |  |  |  |  |  |  |  |  |  |
| Page 144 | | | | | | | | | |
| K EMC gaskets, horizontal  |  |  |  |  |  |  |  | - | - |
| Page 145 | | | | | | | | | |

For ¹⁾insulated or ²⁾conductive attachment of backplanes.

All system requirements may be covered with just a few basic types of horizontal rail. A cost-effective, easy-to-manage range.



Overview horizontal rails HeiPac Vario

| Main sections | BP 3 Rear horizontal rail | BP 4 Rear horizontal rail | BP 5 Rear horizontal rail | BP-M 1 Rear horizontal rail, centre | BP-M 2 Rear horizontal rail, centre (also for HeiPac EASY) | CON 1 Rear horizontal rail, with integral Z rail | CON 2 Rear horizontal rail, with integral Z rail | CON-M 1 Rear horizontal rail, with integral Z rail (also for HeiPac EASY) |
|--|---|---|---|---|---|---|---|---|
| | Page 42 | Page 43 | Page 43 | Page 44 | Page 44 | Page 45 | Page 45 | Page 46 |
| Additional sections |  |  |  |  |  |  |  |  |
| E Adaptor rail, rear centre, to accommodate guide rails  | - | - | - |  |  | - | - |  |
| Page 140 | | | | | | | | |
| F Z rail for connector  |  | - | - |  | - | - | - | - |
| Page 144 | | | | | | | | |
| G Insulating strip ¹⁾  |  | - | - |  | - | - | - | - |
| Page 145 | | | | | | | | |
| H Conductive strip ²⁾  |  | - | - |  | - | - | - | - |
| Page 145 | | | | | | | | |
| I Threaded insert  |  | - | - | - | - |  |  |  |
| Page 144 | | | | | | | | |
| J Identification strips  |  |  |  | - | - |  | - | - |
| Page 144 | | | | | | | | |
| K EMC gaskets, horizontal  | - | - | - | - | - | - | - | - |
| Page 145 | | | | | | | | |

For ¹⁾insulated or ²⁾conductive attachment of backplanes.

SUBRACKS

HORIZONTAL RAILS HeiPac Vario / Vario EMC

Horizontal rail Vario V 1, front



To accommodate guide rails and for the attachment of front panels

- Front projection 2.5 mm corresponding to IEC 60 297-3-101
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole
- Horizontal rail 192 HP without machining on the end faces. Suitable for cutting to length

Material

Extruded aluminium section

Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. unprinted | Order No. printed |
|-------------------|----------|------------------------------|------------------------------|
| 4 (left) | 1 | 3684.592 | - |
| 4 (right) | 1 | 3684.955 | - |
| 8 (left) | 1 | 3684.593 | - |
| 8 (right) | 1 | 3684.956 | - |
| 12 | 1 | 3684.594 | - |
| 16 | 1 | 3684.595 | - |
| 20 | 1 | 3684.596 | - |
| 21 | 1 | 3685.985 | - |
| 40 | 1 | 3684.960 | - |
| 42 | 1 | 3684.560 | 9921.788³⁾ |
| 63 | 1 | 3684.561 | - |
| 84 | 1 | 3684.562 | 9921.789³⁾ |
| 84 | 2 | 3685.267¹⁾ | - |
| 192 | 1 | 3688.000²⁾ | - |

¹⁾ Including 4 assembly screws

²⁾ Anodised



³⁾ with HP pattern printing

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1, order no. 3684.610
see page 144

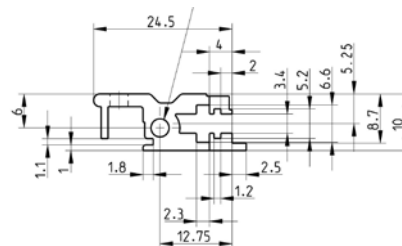

Horizontal rail Vario V 2, front, with double screw fastening



To accommodate guide rails and for the attachment of front panels. The double screw fastening ensures a high level of stability even under extreme loads.

- Front projection 2.5 mm corresponding to IEC 60 297-3-101
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole
- Load test to DIN EN/IEC 61 587-1, requirement level SL1
- Shock and vibration tests undertaken as per IEC 61 373 (DIN EN 50 155), Category 1, Class B

Material

Extruded aluminium section

Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. unprinted | Order No. printed |
|-------------------|----------|---------------------|------------------------------|
| 84 | 1 | 9908.721 | 9921.793¹⁾ |



¹⁾ with HP pattern printing

+ Also required


Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1
order no. 3684.610
see page 144



Horizontal rail Vario V 3, front

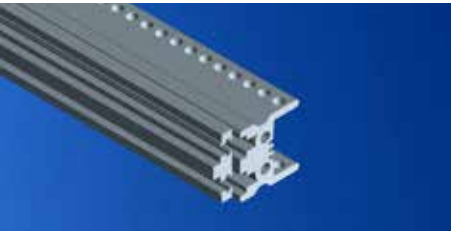

To accommodate guide rails and for the attachment of front panels. For subdivision i. e. 6 U in 2 x 3 U.

- Front projection 2.5 mm corresponding to IEC 60 297-3-101
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. unprinted | Order No. printed |
|-------------------|----------|---------------------|------------------------------|
| 84 | 1 | 9904.745 | 9921.799¹⁾ |



¹⁾ with HP pattern printing

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1
order no. 3684.610
see page 144



Horizontal rail Vario V-Ext. 1, front, with 10 mm extension



For type IV, IVs and VII injector/extractor handle

To accommodate guide rails and for the attachment of front panels.

- Front projection 10 mm corresponding to IEEE 1101.10 and IEC 60 297-3-102
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. unprinted | Order No. printed |
|-------------------|----------|------------------------------|------------------------------|
| 40 | 1 | 3684.961 | - |
| 42 | 1 | 3684.565 | 9921.790³⁾ |
| 63 | 1 | 3684.566 | - |
| 84 | 1 | 3684.567 | 9921.791³⁾ |
| 84 | 2 | 3685.269¹⁾ | - |
| 192 | 1 | 3688.001²⁾ | - |

¹⁾ Including 4 assembly screws

²⁾ Anodised



³⁾ with HP pattern printing

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories


Threaded inserts, packs of 1
order no. 3684.610
see page 144



SUBRACKS

HORIZONTAL RAILS HeiPac Vario / Vario EMC

Horizontal rail Vario V-Ext. 2, with 10 mm extension and double screw fastening, front

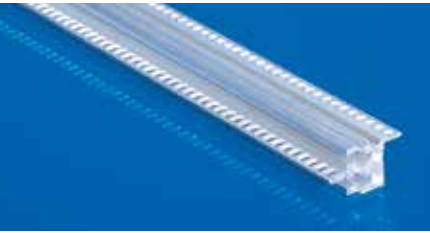

For type IV, IVs and VII injector/extractor handle

To accommodate guide rails and for the attachment of front panels. Double screw fastening and an extra high profile section ensure unique stability evens under extreme loads.


- Front projection 10 mm corresponding to IEEE 1101.10 and IEC 60 297-3-102
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated




| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 3687.724 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1, order no. 3684.610
see page 144

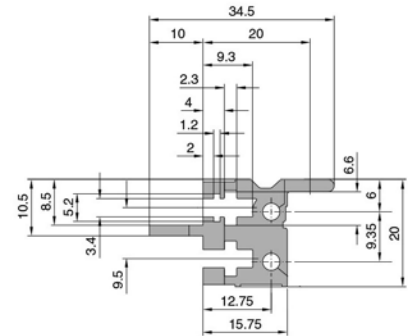

Horizontal rail Vario V-Ext. 3, with 10 mm extension and double screw fastening, front



For type IV, IVs and VII injector/extractor handle

To accommodate guide rails and for the attachment of front panels. The double screw fastening ensures a high level of stability even under extreme loads.


- Front projection 10 mm corresponding to IEEE 1101.10 and IEC 60 297-3-102
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. unprinted | Order No. printed |
|-------------------|----------|---------------------|------------------------------|
| 84 | 1 | 9908.722 | 9921.795¹⁾ |


¹⁾ with HP pattern printing

+ Also required


Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1,
order no. 3684.610
see page 144

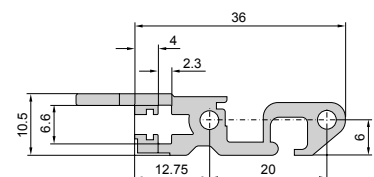

Horizontal rail Vario V-Ext. 4, with 10 mm extension and double screw fastening, front

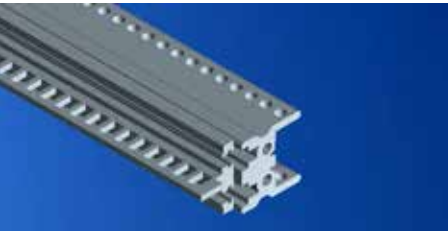

For type IV, IVs and VII injector/extractor handle

For subdivision i. e. 6 U in 2 x 3 U. To accommodate guide rails and for the attachment of front panels

- Front projection 10 mm corresponding to IEEE 1101.10 and IEC 60 297-3-102
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 3688.704 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1,
order no. 3684.610
see page 144



Horizontal rail Vario BP 1, for backplane



To accommodate guide rails and for the attachment of Z rails, insulating strips or conductive strips.

- Tapped holes M2.5 on a 1 HP pitch pattern for mounting backplanes and Z rails
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Applicable for top-mounting under covers
- Straight-through core hole
- Horizontal rail 192 HP without machining on the end faces. Suitable for cutting to length

Material

Extruded aluminium section

Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|------------------------------|
| 21 | 1 | 3685.991 |
| 40 | 1 | 3684.962 |
| 42 | 1 | 3684.570 |
| 63 | 1 | 3684.571 |
| 84 | 1 | 3684.572 |
| 84 | 2 | 3685.268¹⁾ |
| 192 | 1 | 3688.002²⁾ |

¹⁾ Including 4 assembly screws



²⁾ Anodised

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Conductive strips
see page 145
Insulating strips
see page 145
Z rail
see page 144



SUBRACKS

HORIZONTAL RAILS HeiPac Vario / Vario EMC

Horizontal rail Vario BP 2, for backplane



To accommodate guide rails and for the attachment of Z rails, insulating strips or conductive strips. The double screw fastening ensures a high level of stability even under extreme loads.

- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- For mounting backplanes/Z rails additional threaded inserts (9901.816) are required
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------|
| 84 | 1 | 9908.723 |

+ Also required


Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1, order no. 9901.816
see page 144



Horizontal rail Vario BP 3, for backplane

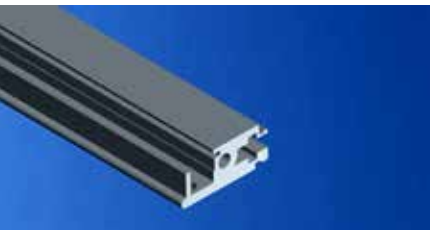

To accommodate guide rails and for the attachment of Z rails, insulating strips or conductive strips.

- HP pitch pattern of holes for the precise installation of guide rails
- Channel for slide-in covers
- Additional threaded inserts (3684.610) are required for mounting backplanes/Z rails
- M4 thread on end face
- Straight-through core hole
- Not suitable for mounting under covers

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------|
| 84 | 1 | 3688.104 |

+ Also required


Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1, order no. 3684.610
see page 144
Insulating strips
see page 145
Conductive strips
see page 145



Horizontal rail Vario BP 4, for conductive mounting of backplanes

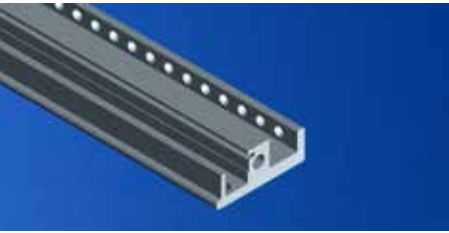

To accommodate guide rails and for the conductive attachment of backplanes

- HP pitch pattern of holes for the precise installation of guide rails
- Tapped holes M2.5 on a HP pitch pattern
- Channel for slide-in covers
- M4 thread on end face
- Straight-through core hole
- Not suitable for mounting under covers
- For mounting slide-in covers
- Due to integrated contact area, insulating strips cannot be used

Material

Extruded aluminium section



Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 9920.069 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202



Horizontal rail Vario BP 5, for conductive mounting of backplanes



To accommodate guide rails and for the conductive mounting of backplanes

- Tapped holes M2.5 on a HP pitch pattern
- HP pitch pattern of holes for the precise installation of guide rails
- Due to integrated contact area, insulating strips cannot be used
- Applicable for top-mounting under covers
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section



Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 9912.522 |

+ Also required


Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202



SUBRACKS

HORIZONTAL RAILS HeiPac Vario / Vario EMC

Horizontal rail Vario BP-M 1, for backplane, centre

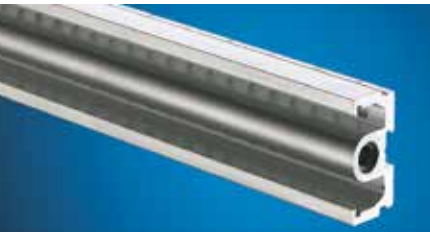

When using 6 U PCBs or box-type plug-in units. Facility for the attachment of Z rails, insulating strips or conductive strips.

- Tapped holes M2.5
- M4 thread on end face
- Straight-through core hole
- Horizontal rail 192 HP for cutting to the required length

Material

Extruded aluminium section

Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-------------------------------|
| 40 | 1 | 3684.963 |
| 42 | 1 | 3684.580 |
| 63 | 1 | 3684.581 |
| 84 | 1 | 3684.582 |
| 84 | 1 | 3685.270 ¹⁾ |
| 168 | 1 | 3684.579 |
| 192 | 1 | 3688.003 ²⁾ |

¹⁾ Including 2 assembly screws



²⁾ Anodised

+ Also required


Assembly screws M4 x 12
Packs of 100, order no. 3654.300

+ Accessories

Insulating strips
see page 145
Conductive strips
see page 145
Z rails
see page 144



Horizontal rail Vario BP-M 2, for backplane, centre

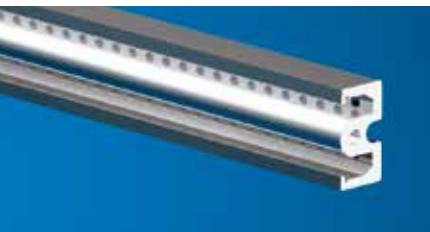

When using 6 U PCBs or box-type plug-in units. Facility for the attachment of Z rails or backplanes.

- Tapped holes M2.5
- M4 thread on end face
- Straight-through core hole
- Due to integrated contact area, insulating strips cannot be used



Material

Extruded aluminium section


Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 9912.523 |



Horizontal rail Vario CON 1, with integral Z rail for connector

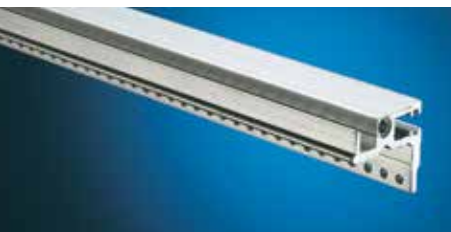

To accommodate guide rails. Integral Z rail for mounting connectors (CON) to IEC 60 603-2.

- HP pitch pattern of holes for the precise installation of guide rails
- Tapped holes M2.5 for connector mounting
- Applicable for top-mounting under covers
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section



Surface finish

Clear-chromated


| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 42 | 1 | 3686.191 |
| 63 | 1 | 3686.919 |
| 84 | 1 | 3686.159 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202



Horizontal rail Vario CON 2, with integral Z rail for connector

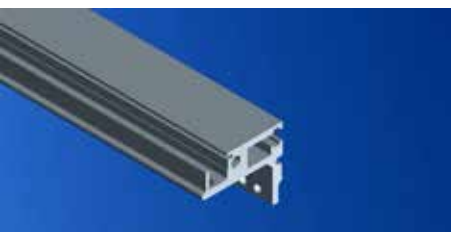

To accommodate guide rails. Integral Z rail for mounting connectors (CON) to DIN 41612

- HP pitch pattern of holes for the precise installation of guide rails
- 84 tapped holes M2.5 for connector mounting
- Not suitable for mounting under covers
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 9901.991 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1, order no. 9901.816
see page 144



SUBRACKS

HORIZONTAL RAILS HeiPac Vario / Vario EMC

Horizontal rail Vario CON-M 1, with integral Z rail for connector, rear centre



When using 6 U PCBs or box-type plug-in units. Integral Z rail for mounting connectors (CON) to IEC 60 603-2

- Tapped holes M2.5
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section



Surface finish

Clear-chromated


| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 42 | 1 | 3687.600 |
| 63 | 1 | 3687.601 |
| 84 | 1 | 3687.602 |
| 168 | 1 | 3687.603 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

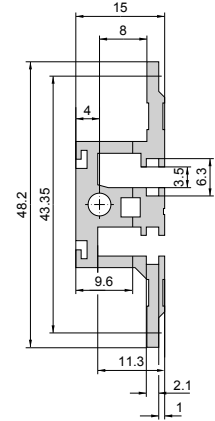

Adaptor rail, rear centre

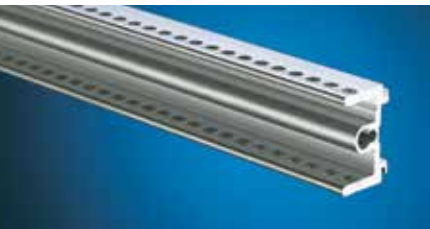

When subdividing 6 U into 2 x 3 U, the adaptor rail accommodates the guide rails when fastened to the centre horizontal rail.

- HP pitch pattern of holes for the precise installation of guide rails
- M4 and M2.5 thread on the end face
- Applicable in combination with BP-M 1, BP-M 2 and EST-M 1
- Straight-through core hole
- Horizontal rail 192 HP without machining on the end faces. Suitable for cutting to length

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|------------------------------|
| 12 | 1 | 3684.587 |
| 16 | 1 | 3684.588 |
| 20 | 1 | 3684.589 |
| 40 | 1 | 3684.964 |
| 42 | 1 | 3684.590 |
| 63 | 1 | 3686.005 |
| 84 | 1 | 3684.591 |
| 84 | 1 | 3685.272¹⁾ |
| 168 | 1 | 3684.584 |
| 192 | 1 | 3688.004²⁾ |

¹⁾ Including 4 assembly screws


















²⁾ Anodised

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202




Overview HeiPac Vario horizontal rail descriptions

| Description old | Description new | Main sections | Description old | Description new | Main sections |
|-----------------|-----------------|---|-----------------|-----------------|---|
| A | V 1 |  | C7 | BP 3 |  |
| A1 | V 2 |  | - | BP 4 |  |
| - | V 3 |  | - | BP 5 |  |
| B | V-Ext. 1 |  | D1 | BP-M 1 |  |
| B1 | V-Ext. 2 |  | D3 | BP-M 2 |  |
| B2 | V-Ext. 3 |  | C3 | CON 1 |  |
| - | V-Ext. 4 |  | C8 | CON 2 |  |
| C1 | BP 1 |  | D2 | CON-M 1 |  |
| C6 | BP 2 |  | | | |

SUBRACKS COMPONENTS HeiPac Vario / Vario EMC

Side panels for HeiPac Vario

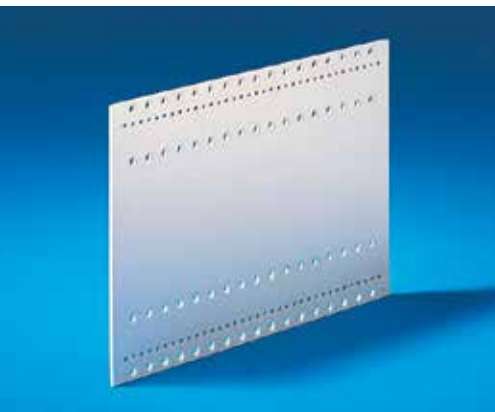


Mounting holes and anti-twist half-shears on a 10 mm pitch pattern.

Material

2.5 mm Aluminium,
Clear-chromated

| U | | | Order No. | | | | | | | | | |
|-------------|-----------------------|-------------|-----------|-----------|---------------|----------|-----------|---------------|----------|----------|----------|---|
| | | | 3 | 4 (3 + 1) | 4 (3 + 2 x ½) | 6 | 7 (6 + 1) | 7 (6 + 2 x ½) | 9 | 10 | 11 | |
| D (T) mm | a ¹⁾ mm | Packs of | | | | | | | | | | |
| 175 | 150 | 1 | 9901.021 | - | - | 9901.023 | - | - | - | - | - | - |
| 185 | 160 | 1 | 3684.511 | - | - | 3684.529 | - | - | - | - | - | - |
| 225 | 200 | 1 | 3684.512 | 3685.793 | 3685.890 | 3684.530 | 3685.896 | 3685.893 | 3685.797 | - | - | - |
| 245 | 220 | 1 | 3684.513 | 3685.850 | 3685.891 | 3684.531 | 3685.897 | 3685.894 | - | - | - | - |
| 285 | 260 | 1 | 3684.514 | 3684.523 | 3684.526 | 3684.532 | 3685.743 | 3685.895 | - | - | - | - |
| 305 | 280 | 1 | 3684.515 | 3685.794 | - | 3684.533 | - | - | 3685.798 | - | - | - |
| 345 | 320 | 1 | 3684.516 | 3684.524 | 3684.527 | 3684.534 | 3685.744 | 3685.745 | 3684.547 | - | - | - |
| 365 | 340 | 1 | 3684.517 | 3685.795 | - | 3684.535 | - | - | 3685.799 | - | - | - |
| 405 | 380 | 1 | 3684.518 | 3684.525 | 3684.528 | 3684.536 | 3684.541 | 3684.543 | 3684.548 | 3684.545 | - | - |
| 425 | 400 | 1 | 3684.519 | - | - | 3684.537 | - | - | - | - | - | - |
| 465 | 440 | 1 | 3684.520 | 3685.796 | 3685.892 | 3684.538 | 3684.542 | 3684.544 | 3684.549 | 3684.546 | 3684.552 | - |
| 525 | 500 | 1 | 3684.521 | 9906.727 | - | 3684.539 | 3685.898 | 3685.959 | 3684.550 | 3685.899 | 3684.553 | - |
| 585 | 560 | 1 | 3684.522 | 9906.914 | - | 3684.540 | - | - | 3684.551 | - | 3684.554 | - |

¹⁾ a = Distance between the first and last mounting hole.

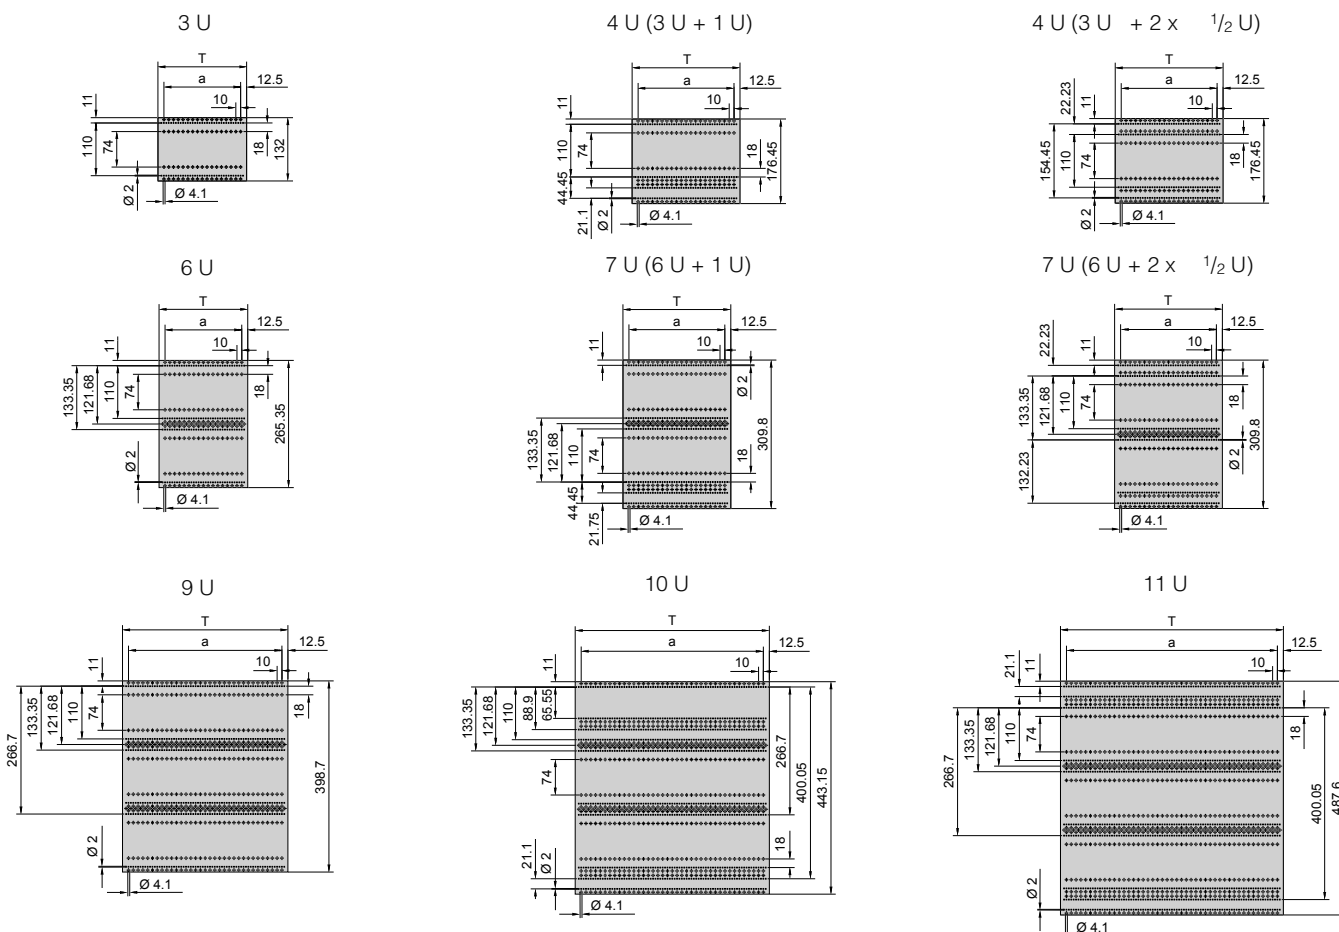

Flanges 19" for HeiPac Vario



With integral channel to accommodate EMC gaskets.


Material
Extruded aluminum section

Surface finish
Clear-chromated

| U | Packs of | Order No. | |
|----|----------|-------------------|----------------------|
| | | with handle holes | without handle holes |
| 2 | 1 | - | 3684.614 |
| 3 | 1 | 3684.622 | 3684.615 |
| 4 | 1 | 3684.623 | 3684.616 |
| 6 | 1 | 3684.624 | 3684.617 |
| 7 | 1 | 3684.625 | 3684.618 |
| 9 | 1 | - | 3684.619 |
| 10 | 1 | - | 3684.620 |
| 11 | 1 | - | 3684.621 |

+ Accessories

EMC gaskets, vertical
see page 146
Handles for subrack
see page 57

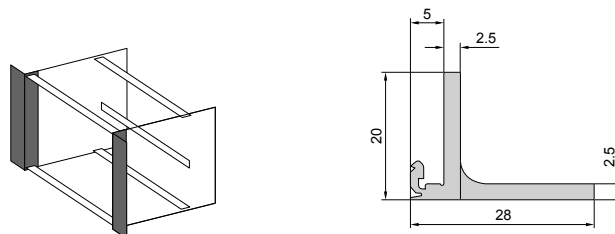

Flanges 19" for HeiPac Vario, set-back




Material
Extruded aluminum section

Surface finish
Clear-chromated

| U | Packs of | Order No. |
|----|----------|-----------------|
| 3 | 1 | 3684.626 |
| 4 | 1 | 3684.627 |
| 6 | 1 | 3684.628 |
| 7 | 1 | 3684.629 |
| 9 | 1 | 3684.630 |
| 10 | 1 | 3684.631 |
| 11 | 1 | 3684.632 |

+ Also required

Assembly screws, nuts and washers
packs of 4 sets, Order No. 3687.015
see page 203

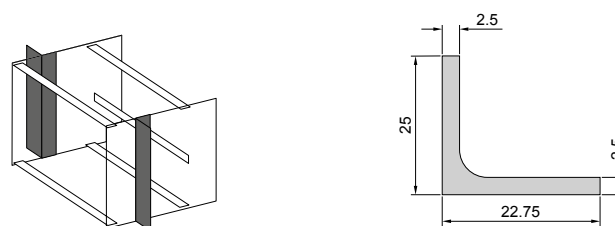

SUBRACKS COVERS HeiPac Vario / Vario EMC

Covers version 1



For all HeiPac Vario subracks

To cover the overall-subrack depth
(EMC application) or as connector protection

- Flat design for top and bottom
- Optionally solid or perforated
- For mounting on the subrack side panel with the aid of mounting blocks

Material

1.0 mm aluminium, unplated, hole diameter 4 mm in perforated version.

Each set includes

2 cover plates
8 mounting blocks 28.5 mm
24 assembly screws

Individual unit includes

1 cover plate

Note

For EMC applications, additional mounting blocks must be fitted across the entire subrack depth.



| | | | Order No. | | | |
|----|-----------------------------|---------------------|----------------------------|-----------------|-----------------|-----------------|
| | | | Single piece ¹⁾ | | Set | |
| HP | For side panel depth (T) mm | Cover depth (d1) mm | Perforated | Solid | Perforated | Solid |
| 21 | 225 | 192 | 3687.618 | 3687.620 | - | - |
| 21 | 285 | 252 | 3687.619 | 3687.621 | - | - |
| 42 | 175 | 142 | 3684.957 | 3687.626 | - | - |
| 42 | 225 | 192 | 3687.623 | 3687.627 | - | - |
| 42 | 245 | 212 | 3684.958 | 3687.628 | - | - |
| 42 | 285 | 252 | 3685.642 | 3687.629 | - | - |
| 84 | 175 | 142 | 3684.681 | 3684.680 | 3685.245 | 3685.250 |
| 84 | 225 | 192 | 3684.694 | 3684.683 | - | - |
| 84 | 235 | 202 | 3685.851 | 3685.813 | - | - |
| 84 | 245 | 212 | 3684.695 | 3684.684 | 3685.246 | 3685.251 |
| 84 | 285 | 252 | 3684.696 | 3684.685 | - | - |
| 84 | 295 | 262 | 3685.855 | 3685.814 | - | - |
| 84 | 305 | 272 | 3685.852 | 3684.686 | 3685.247 | 3685.252 |
| 84 | 345 | 312 | 3684.698 | 3684.687 | - | - |
| 84 | 365 | 332 | 3685.853 | 3684.688 | 3685.248 | 3685.253 |
| 84 | 405 | 372 | 3684.700 | 3684.689 | 3685.249 | 3685.254 |
| 84 | 465 | 432 | 3684.701 | 3684.691 | - | - |
| 84 | 525 | 492 | 3684.702 | 3684.692 | - | - |
| 84 | 585 | 552 | 3684.703 | 3684.693 | - | - |

+ Also required


¹⁾ Mounting blocks, see page 148

¹⁾ EMC gaskets for cover plates, see page 147

¹⁾ Assembly screws, packs of 100, order no. 3684.233 see page 202



Covers version 2

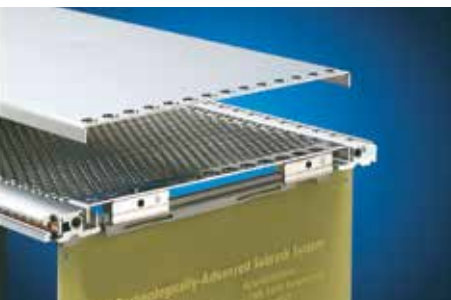

For all HeiPac Vario subracks

To cover the PCB depth

- Flat design for top and bottom
- Optionally solid or perforated
- For mounting on the subrack side panel with the aid of mounting blocks

Material

1.0 mm aluminium, unplated, hole diameter 4 mm in perforated version

Each set includes

2 cover plates
8 mounting blocks 28.5 mm
24 assembly screws

Individual unit includes:



1 cover plates

| | | | Order No. | | | |
|----|-----------------------|---------------------|----------------------------|-----------------|-----------------|-----------------|
| | | | Single piece ¹⁾ | | Set | |
| HP | For PCB depth (d2) mm | Cover depth (d1) mm | Perforated | Solid | Perforated | Solid |
| 21 | 160 | 142 | 3687.630 | 3687.634 | - | - |
| 21 | 220 | 202 | 3687.631 | 3687.635 | - | - |
| 42 | 160 | 142 | 3684.957 | 3687.626 | - | - |
| 42 | 220 | 202 | 3687.633 | 3687.637 | - | - |
| 42 | 280 | 262 | 3687.638 | 3687.639 | - | - |
| 84 | 160 | 142 | 3684.681 | 3684.680 | 3685.245 | 3685.250 |
| 84 | 220 | 202 | 3685.851 | 3685.813 | - | - |
| 84 | 280 | 262 | 3685.855 | 3685.814 | - | - |
| 84 | 340 | 322 | 3685.856 | - | - | - |
| 84 | 400 | 382 | 3685.857 | - | - | - |

+ Also required

¹⁾ Mounting blocks, see page 148

¹⁾ Assembly screws, packs of 100, order no. 3684.233 see page 202



SUBRACKS COVERS HeiPac Vario / Vario EMC

Covers version 3



For all HeiPac Vario subracks

To cover the overall subrack depth (EMC application)

- Cover with 1 U edge fold (item 1), to conceal the 1 U area in the subrack
- A version 1 fl at cover (item 2) is additionally required
- Optionally perforated or solid on the front
- Suitable for subracks 4 U (3 + 1), 7 U (6 + 1)
- For mounting on the subrack side panel with the aid of mounting blocks

Material

1.0 mm aluminium, unplated, hole diameter 4 mm in perforated version.



Note

For EMC applications, mounting blocks must be fitted across the entire subrack depth.


| HP | For side panel depth (T) mm | Cover depth (d3) mm | Order No. | |
|----|-----------------------------|---------------------|-----------------|-----------------|
| | | | Perforated | Solid |
| 84 | 285 | 270 | 3684.720 | 3684.714 |
| 84 | 345 | 330 | 3684.721 | 3684.715 |
| 84 | 405 | 390 | 3684.722 | 3684.716 |
| 84 | 465 | 450 | 3684.723 | 3684.717 |
| 84 | 525 | 510 | 3684.724 | 3684.718 |
| 84 | 585 | 570 | 3684.725 | 3684.719 |

+ Also required

Mounting blocks, see page 148
EMC gaskets for covers, see page 147
Assembly screws, packs of 100, order no. 3684.233, see page 202
Cover, version 1, see page 161



Covers version 4

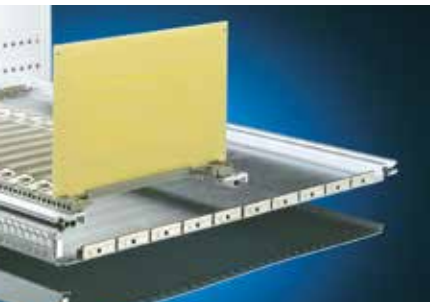

For all HeiPac Vario subracks

To cover the overall subrack depth (EMC application)

- Cover top/bottom with 1/2 U edge fold to cover the 1/2 U section in the subrack
- Optionally perforated or solid on the front
- Suitable for subracks 4 U (3 + 2 x 1/2), 7 U (6 + 2 x 1/2)
- For mounting on the subrack side panel with the aid of mounting blocks.

Material

1.0 mm aluminium, unplated, hole diameter 4 mm in perforated version.



Note

For EMC applications, mounting blocks must be fitted across the entire subrack depth.

| HP | For side panel depth (T) mm | Cover depth (d3) mm | Order No. | |
|----|-----------------------------|---------------------|-----------------|-----------------|
| | | | Perforated | Solid |
| 84 | 285 | 270 | 3684.732 | 3684.726 |
| 84 | 345 | 330 | 3684.733 | 3684.727 |
| 84 | 405 | 390 | 3684.734 | 3684.728 |
| 84 | 465 | 450 | 3684.735 | 3684.729 |
| 84 | 525 | 510 | 3684.736 | 3684.730 |
| 84 | 585 | 570 | 3684.737 | 3684.731 |

+ Also required

Mounting blocks, see page 148
EMC gaskets for covers, see page 147
Assembly screws, packs of 100, order no. 3684.233, see page 202



Covers version 5



For all HeiPac Vario subracks

To cover the overall subrack depth or PCB depth.
(EMC application)

Simple assembly:

- Side edge fold with half shears facilitates fast assembly (without mounting blocks) by simply snap-fastening
- Side notches for fitting horizontal rails in 160, 220 or 280 mm depth
- Optionally solid or perforated



Material

1.0 mm aluminium, unplated, hole diameter 4 mm in perforated version.

Supply includes

2 gaskets

| HP | Position of side notches for horizontal rails mm | For side panel depth mm | Order No. | |
|----|--|-------------------------|-----------------|-----------------|
| | | | Perforated | Solid |
| 21 | 160 | 175/185 | 3687.624 | - |
| 21 | 160/220 | 235 | 3687.692 | - |
| 42 | 160 | 175/185 | 3687.625 | - |
| 42 | 160/220 | 235 | 3687.677 | - |
| 42 | 160 | 245 | 3687.640 | - |
| 84 | 160 | 175/185 | 3687.641 | 3687.647 |
| 84 | 160 | 245 | 3687.642 | 3687.648 |
| 84 | 160/220 | 235 | 3687.643 | 3687.649 |
| 84 | 160/220 | 285 | 3687.644 | 3687.650 |
| 84 | 160/220 | 305 | 3687.645 | 3687.651 |
| 84 | 160/220/280 | 345 | 3687.646 | 3687.652 |



SUBRACKS MOUNTING COVERS HeiPac Vario / Vario EMC

Mounting blocks for cover plates



For mounting covers, versions 1 – 4, on the subrack side panel.

Material

Die-cast zinc

Surface finish

Nickel-plated

Note

For EMC applications, mounting blocks must be fitted across the entire subrack depth. The table here shows the number of mounting blocks required to install 1 cover plate with EMC shielding.


| | Packs of | Order No. |
|------------------------------|----------|-----------------|
| Mounting blocks 28.5 mm long | 10 | 3684.234 |

| Number of mounting blocks for max. EMC protection | Cover plate depth mm |
|---|----------------------|
| 4 | 142 |
| 8 | 192 |
| 10 | 212 |
| 12 | 252 |
| 14 | 272 |
| 16 | 312 |
| 18 | 332 |
| 20 | 372 |
| 24 | 432 |
| 28 | 492 |
| 32 | 552 |


EMC

+ Also required

Assembly screws M3 x 6, packs of 100, order no. 3684.233, see page 202

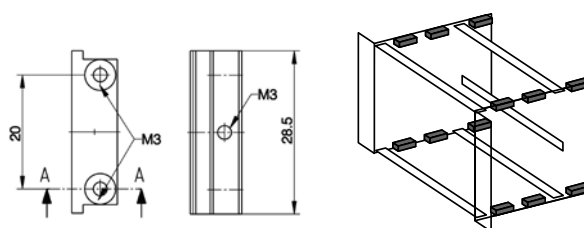

Mounting clips for cover plates

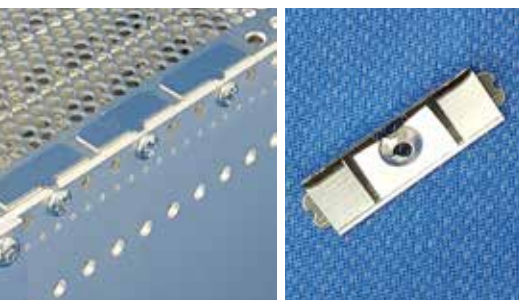

For mounting covers on the subrack side panel

Compatible with cover plate versions 1-4 and the ECO and EASY versions, and with sheet metal blanks 0.8-1.0 mm thick. For EMC applications, mounting clips must be fitted across the full depth of the subrack.

Material



Stainless steel

| Length mm | n | Packs of | Order No. |
|-----------|---|----------|-----------------|
| 30 | 1 | 1 | 3688.109 |
| 90 | 3 | 1 | 9921.722 |
| 120 | 4 | 1 | 9921.883 |
| 150 | 5 | 1 | 9921.723 |
| 180 | 6 | 1 | 9921.884 |
| 210 | 7 | 1 | 9921.724 |
| 240 | 8 | 1 | 9921.885 |

+ Also required

Assembly screws, order no. 9921.879

NEW

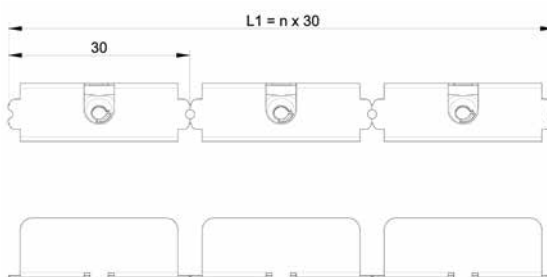

EMC

COMPONENTS FOR EMC INSTALLATION HeiPac Vario / Vario EMC

EMC gaskets, vertical



To ensure EMC protection between the subrack side panel and the front/rear panels. There are two versions available.

Suitable for mounting on:

- 482.6 mm (19") fl anges for subracks
- Corner trims, rear
- EMC contact strip
- U-channel front panels

Material

Stainless steel

German patent
no. 101 15 525 and
no. 198 46 627
US patent no. 6,500,012
US patent no. 7,044,753


EMC

Version 1: Segmented

| U | Order No. Packs of 1 | Order No. Packs of 10 |
|----|-------------------------|--------------------------|
| 1 | 3686.973 | 3684.236 |
| 2 | 3686.974 | 3684.237 |
| 3 | 3686.975 | 3684.238 |
| 4 | 3686.976 | 3684.239 |
| 6 | 3686.977 | 3684.240 |
| 7 | 3686.978 | 3684.241 |
| 9 | 3686.979 | 3684.242 |
| 10 | 3686.980 | 3684.243 |
| 11 | 3686.981 | 3684.244 |

Version 2: One-piece

| U | Order No. Packs of 1 | Order No. Packs of 10 |
|----|-------------------------|--------------------------|
| 2 | 3688.610 | - |
| 3 | 3688.611 | 9921.942 |
| 4 | 3688.612 | - |
| 5 | 3688.613 | - |
| 6 | 3688.614 | 9921.943 |
| 7 | 3688.615 | - |
| 8 | 3688.634 | - |
| 9 | 3688.616 | 9921.944 |
| 10 | 3688.609 | - |
| 11 | 3688.633 | - |
| 12 | 3688.606 | - |

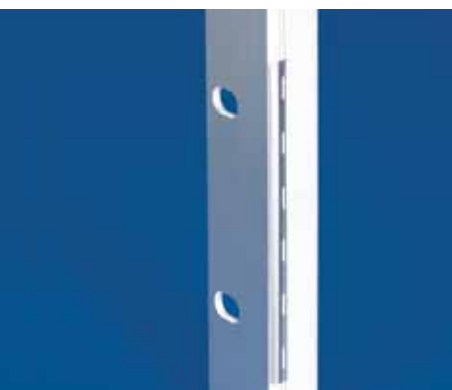

EMC contact strip



To ensure EMC protection when horizontal rails are set-back. Integral channel to accommodate EMC gaskets.

Material

Extruded aluminium section

Surface finish

Clear-chromated

Note


2 sections are required for each subrack.

| U | Packs of | Order No. |
|---|----------|-----------------|
| 3 | 1 | 3684.643 |
| 6 | 1 | 3684.644 |
| 9 | 1 | 3684.645 |

+ Also required


EMC gaskets, vertical, see page 55
Assembly screws M3 x 6, packs of 100,
order no. 3684.233, see page 202

EMC



SUBRACKS COMPONENTS FOR EMC INSTALLATION HeiPac Vario / Vario EMC

EMC gaskets for front horizontal rails

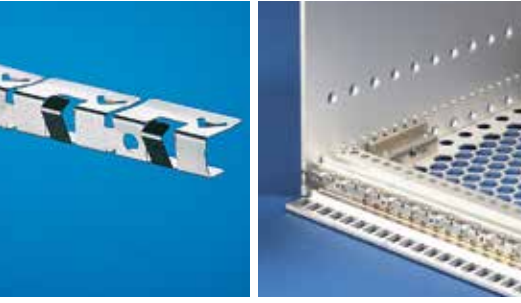


For horizontal EMC protection.
For snapfastening onto the front horizontal rails.

Material
Stainless steel


European patent
no. 0 937 375 with validity
for DE
US patent no. 6,137,052
Chinese patent
no. ZL 97 1 98582.0

| Usable width (HP) | Packs of | Order No. |
|--|----------|-----------------|
| For top/bottom horizontal rail | | |
| 40 | 1 | 3684.974 |
| 40 | 10 | 9921.945 |
| 84 | 1 | 3684.808 |
| 84 | 10 | 3684.246 |
| For sub-division of 6 U into 2 x 3 U, between 2 horizontal rails | | |
| 84 | 1 | 3685.789 |
| 84 | 10 | 3685.229 |

EMC



EMC gaskets for covers

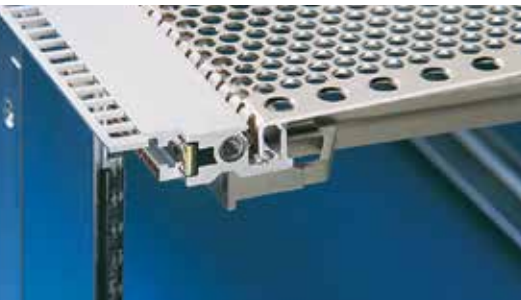


For EMC shielding between the horizontal rails and covers.

Material
Stainless steel

| HP | Packs of | Order No. |
|----|----------|-----------------|
| 40 | 1 | 3684.975 |
| 84 | 1 | 3684.807 |
| 84 | 10 | 3684.245 |

EMC

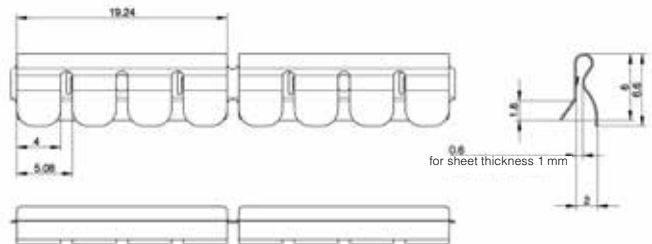

RECOMMENDED ACCESSORIES HeiPac Vario / Vario EMC

Trim section for HeiPac Vario, rear




Ensures 84 HP fit at the rear of the subrack. With integral channel to accommodate EMC gaskets.

- Material**
Extruded aluminium section
- Surface finish**
Clear-chromated


| U | Order No. | |
|----|-----------------|-----------------|
| | Packs of 1 | Packs of 2 |
| 2 | 3684.633 | - |
| 3 | 3684.634 | 3685.276 |
| 4 | 3684.635 | - |
| 6 | 3684.636 | 3685.277 |
| 7 | 3684.637 | - |
| 9 | 3684.638 | - |
| 10 | 3684.639 | - |
| 11 | 3684.640 | - |

+ Accessories

EMC gaskets, vertical, see page 146

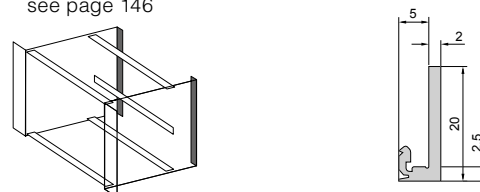

Back cover for HeiPac Vario

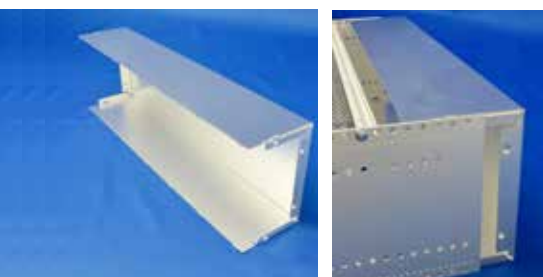

Ensures cover for back of subrack

- Material**
Aluminium
- Surface finish**
Clear-chromated


Note
The side panel depth required is obtained by taking the length of the plug-in units used, and adding 85 mm (refer to table). A precondition is the use of a horizontal rail that allows room for additional construction.

NEW

| U | Packs of | Order No. |
|---|----------|-----------------|
| 3 | 1 | 9921.685 |
| 6 | 1 | 9921.710 |

| PCB depth mm | Side panel depth mm |
|--------------|---------------------|
| 160 | 245 |
| 220 | 305 |
| 280 | 365 |

Horizontal rail that allows room for additional construction

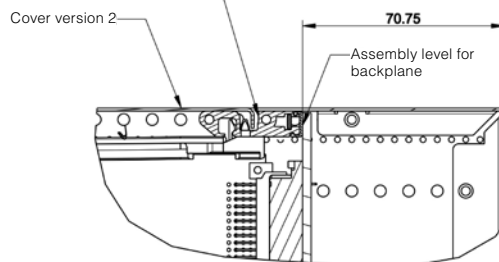


Handles for HeiPac subracks



For fitting on the subrack flange with handle holes and on all component shelves.

- Material**
Die-cast zinc
- Supply includes**
Assembly parts
- Surface finish**
Spray-finished, silver-grey

| For | L1 | L2 | Packs of | Order No. |
|----------------------|-------|-------|----------|-----------------|
| Subracks 3 U and 4 U | 114.5 | 130.5 | 2 | 3636.010 |
| Subracks 6 U and 7 U | 248 | 264 | 2 | 3666.010 |

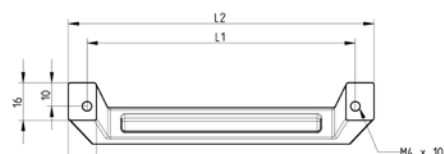

Additional accessories see page

- Guide rails** → 154
- Assembly parts** → 202

SUBRACKS

HeiPac Vario ECO



Economical 19" subrack system for standard applications

Applications

Economical subrack system for standard applications. Suitable for installation of standardised PCBs or plug-in units of 160 and 220 mm depth.

Technical specifications

- Based on the HeiPac Vario subrack family, the basic components (horizontal rails) of the HeiPac Vario ECO are partly compatible with the HeiPac Vario.
- 482.6 mm (19") subrack according to DIN 41 494, part 5/ IEC 60 297-3
- 3 and 6 U
- For board depths: 160 mm and 220 mm
- Side panels of sheet steel, zinc-plated
- Pre-configured assembly points for horizontal rails
- Rear installation for backplanes, optionally for connectors
- Separate 19" flanges

Benefits at a glance

- Fast and easy handling
- Low-cost version
- Upgradable for assembly of backplanes or connectors




Optional EMC upgrade ensures high EMC protection



A wide range of accessories allow manifold expansions




Side panels made of zinc-plated sheet steel



Plug-in top covers facilitate an easy assembly

HeiPac Vario ECO 3 U, 6 U, sheet steel

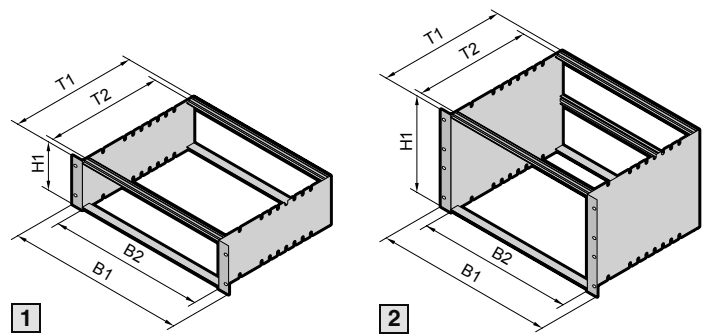

Material/surface finish

Side panels: 1.5 mm sheet steel, zinc-plated
Horizontal rails: Extruded aluminium section, clear-chromated
Flanges: Extruded aluminium section, clear-chromated

Supply includes


Side panels, flanges, horizontal rails, threaded inserts, assembly screws

Tests


Shock and vibration tested to:
IEC 600-68-2-6 Prüfung Fc
IEC 600-68-2-27 Prüfung Ea

Standards

HeiPac subracks are based on the system dimensions of IEC 60 297-3.



1 for backplane



2 for backplane

| | | | | | Order No. | |
|---------------|-------|--------------------|-------|-------------------|-----------------|-----------------|
| | | | | | 1 | 2 |
| U (H1) | | | | | 3 | 6 |
| B1 mm | B2 HP | Side panel (T1) mm | T2 mm | Max. PCB depth mm | For backplane | For backplane |
| 482.6 (19") | 84 | 175 | 150 | 160 | 3688.114 | 3688.116 |
| | | 235 | 210 | 220 | 3688.115 | 3688.117 |

Other customised subrack solutions are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

SUBRACKS

HORIZONTAL RAILS HeiPac Vario ECO


Overview horizontal rails HeiPac Vario ECO

| Main sections | V 1 Front horizontal rail | BP 3 Rear horizontal rail | CON 2 Rear horizontal rail, with integral Z rail | BP-M 1 Rear horizontal rail, centre |
|---|------------------------------|------------------------------|--|--|
| | Page 62 | Page 62 | Page 61 | Page 61 |
| Additional sections | | | | |
| E Adaptor rail, rear centre, to accommodate guide rails | - | - | - | |
| F Z rail for connector | - | | - | |
| G Insulating strip ¹⁾ | - | | - | |
| H Conductive strip ²⁾ | - | | - | |
| I Threaded insert | | | | - |
| J Identification strips | | | - | - |
| K EMC gaskets, horizontal | | | - | - |

For ¹⁾insulated or ²⁾conductive attachment of backplanes.

All system requirements may be covered with just a few basic types of horizontal rail. A cost-effective, easy-to-manage range.

Horizontal rail Vario BP-M 1, for backplane, centre

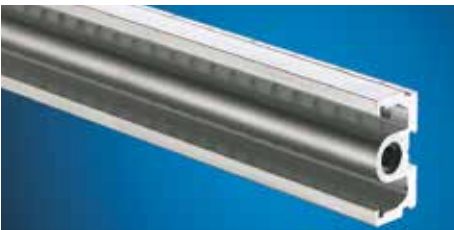

When using 6 U PCBs or box-type plug-in units. Facility for the attachment of Z rails, insulating strips or conductive strips.

- Tapped holes M2.5
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|------------------------|
| 84 | 1 | 3684.582 |
| 84 | 1 | 3685.270 ¹⁾ |



¹⁾ Including 2 assembly screws

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300

+ Accessories

Conductive strips
see page 145
Insulating strips
see page 145
Z rails
see page 144



Horizontal rail Vario CON 2, with integral Z rail for connector



To accommodate guide rails. Integral Z rail for mounting connectors (CON) to DIN 41612

- HP pitch pattern of holes for the precise installation of guide rails
- 84 tapped holes M2.5 for connector mounting
- Not suitable for mounting under covers
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------|
| 84 | 1 | 9901.991 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300

+ Accessories

Threaded inserts, packs of 1, order no. 9901.816
see page 144



SUBRACKS

HORIZONTAL RAILS HeiPac Vario ECO

Horizontal rail Vario V 1, front



To accommodate guide rails and for the attachment of front panels

- Front projection 2.5 mm corresponding to IEC 60 297-3-101
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 3684.562 |

+ Also required


Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1, order no. 3684.610
see page 144

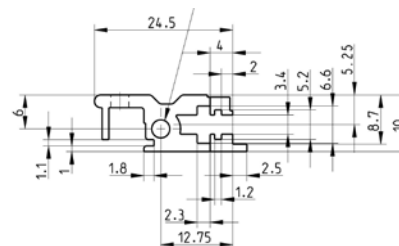

Horizontal rail Vario BP 3, for backplane, with integral channel for slide-in covers

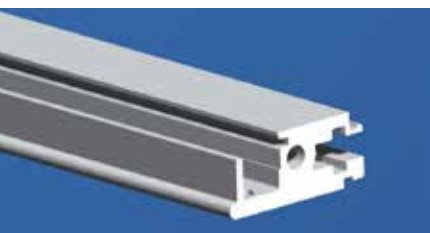

To accommodate guide rails and for the attachment of Z rails, insulating strips or conductive strips.

- HP pitch pattern of holes for the precise installation of guide rails
- Channel for slide-in covers
- Additional threaded inserts (3684.610) are required for mounting backplanes/Z rails
- M4 thread on end face
- Straight-through core hole
- Not suitable for mounting under covers

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 3688.104 |

+ Also required


Assembly screws M4 x 12
Packs of 100, order no. 3654.300

+ Accessories

Threaded inserts, packs of 1, order no. 3684.610
see page 144



Side panels for HeiPac Vario ECO

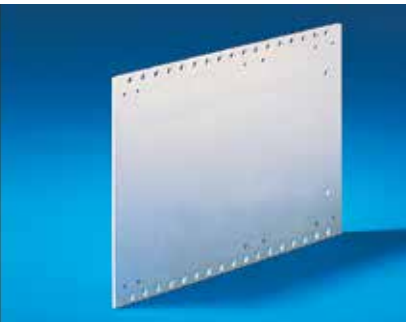

Mounting holes on a 10 mm pitch pattern.



Material

1.5 mm sheet steel
Zinc-plated


| D (T) mm | Packs of | Max. board depth mm | Order No. | |
|-------------|----------|------------------------|-----------------|-----------------|
| | | | 3 U | 6 U |
| 175 | 1 | 160 | 3688.100 | 3688.102 |
| 235 | 1 | 220 | 3688.101 | 3688.103 |

+ Accessories

Flanges for HeiPac ECO
see page 63

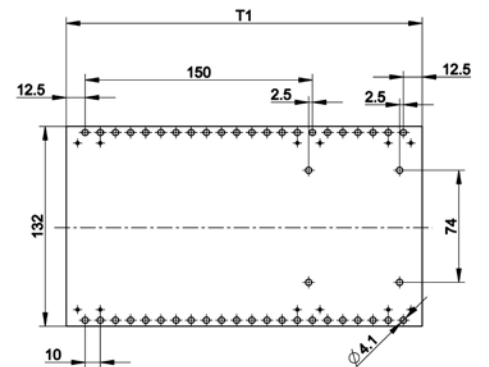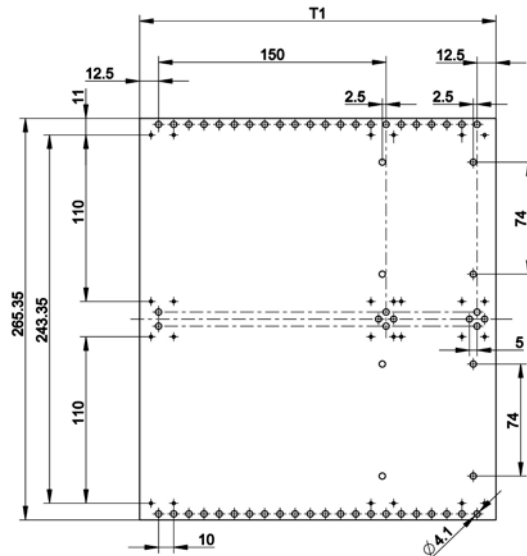

Flanges 19" for HeiPac Vario ECO

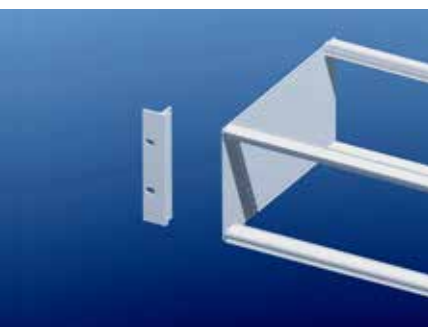


Material

Extruded aluminum section

Surface finish


Clear-chromated

| U | Packs of | Order No. |
|---|----------|-----------------|
| 3 | 1 | 3688.110 |
| 6 | 1 | 3688.111 |




SUBRACKS RECOMMENDED ACCESSORIES HeiPac Vario ECO

Covers for HeiPac Vario ECO

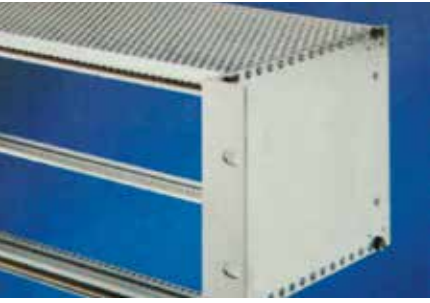

- To cover the overall subrack depth
- Perforated or solid
 - The covers are slid into the horizontal rails
 - Optionally with screwed fastening clips for additional support

| | |
|------------------------|---------------|
| Material | Sheet steel |
| Surface finish | Zinc-plated |
| Supply includes | 1 cover plate |

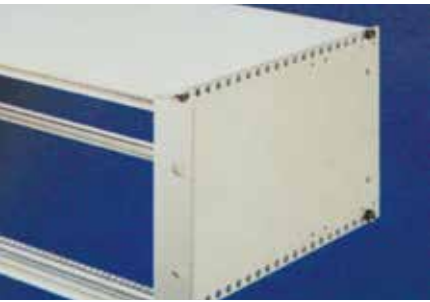


| HP | For side panel depth mm | Order No. | |
|----|-------------------------|-----------------|-----------------|
| | | Perforated | Solid |
| 84 | 175 | 3688.105 | 3688.107 |
| 84 | 235 | 3688.106 | 3688.108 |

+ Accessories
Fastening clips

| Packs of | Order No. |
|----------|-----------------|
| 1 | 3688.109 |

Assembly screw


| Packs of | Order No. |
|----------|-----------------|
| 100 | 9921.879 |

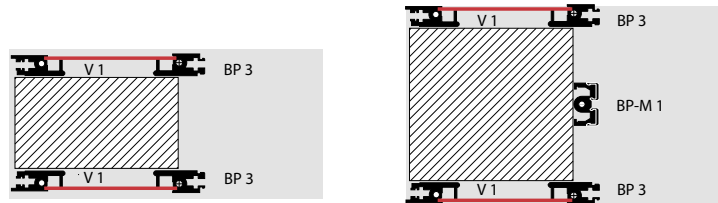

1 for backplane

2 for backplane

Mounting clips for cover plates

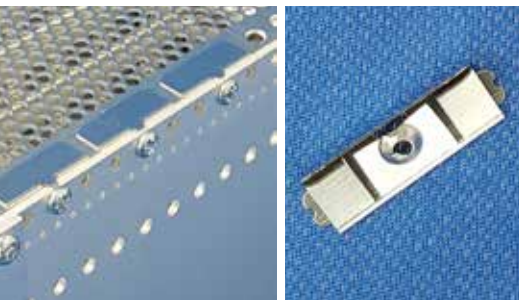

For mounting covers on the sub-rack side panel



Compatible with cover plate versions 1-4 and the ECO and EASY versions, and with sheet metal blanks 0.8-1.0 mm thick. For EMC applications, mounting clips must be fitted across the full depth of the subrack.

| | |
|-----------------|-----------------|
| Material | Stainless steel |
|-----------------|-----------------|

| Length mm | n | Packs of | Order No. |
|-----------|---|----------|-----------------|
| 30 | 1 | 1 | 3688.109 |
| 90 | 3 | 1 | 9921.722 |
| 120 | 4 | 1 | 9921.883 |
| 150 | 5 | 1 | 9921.723 |
| 180 | 6 | 1 | 9921.884 |
| 210 | 7 | 1 | 9921.724 |
| 240 | 8 | 1 | 9921.885 |


+ Also required
Assembly screws, order no. 9921.879

NEW

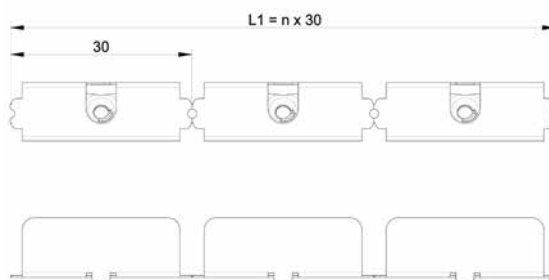

EMC

Back cover for HeiPac Vario

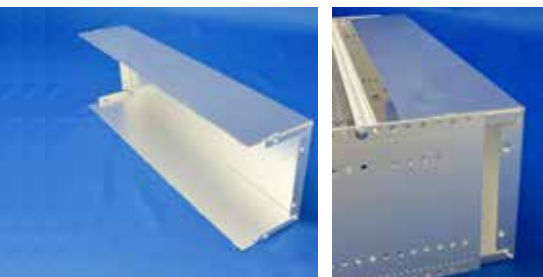

Ensures cover for back of subrack

Material
Aluminium


Surface finish
Clear-chromated

Note
The side panel depth required is obtained by taking the length of the plug-in units used, and adding 85 mm (refer to table).
A precondition is the use of a horizontal rail that allows room for additional construction.


NEW

| U | Packs of | Order No. |
|---|----------|-----------|
| 3 | 1 | 9921.685 |
| 6 | 1 | 9921.710 |

| PCB depth mm | Side panel depth mm |
|--------------|---------------------|
| 160 | 245 |
| 220 | 305 |
| 280 | 365 |

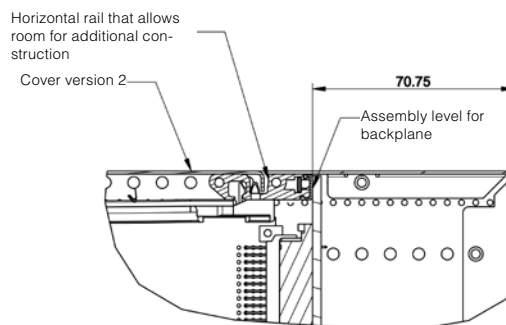

Trim section for HeiPac Vario ECO, rear

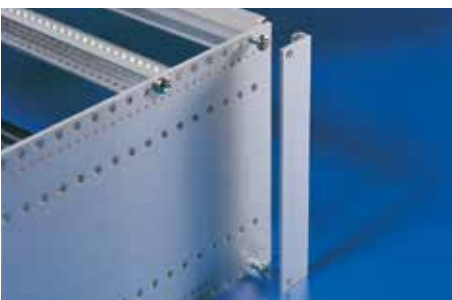

Ensures 84 HP fit at the rear of the subrack. With integral channel to accommodate EMC gaskets.



Material
Extruded aluminium section

Surface finish
Clear-chromated

| U | Packs of | Order No. |
|---|----------|-----------|
| 3 | 1 | 3688.112 |
| 6 | 1 | 3688.113 |

+ Accessories

EMC gaskets, vertical, see page 146



Additional accessories see page

- Guide rails** → 154
- Assembly parts** → 202

SUBRACKS

HeiPac Vario COMPACT



For mounting plates or top-hat rails

Applications

Subrack system for direct mounting in a cabinet. Mounting either on top hat rails or on mounting plate. Suitable for installation of standardised PCBs or plug-in units.

Technical specifications

- Based on the HeiPac Vario subrack family, the basic components of the HeiPac Vario COMPACT are compatible with the HeiPac Vario.
- Subrack according to IEC 60 297-3
- 3 and 6 U
- Side panels of aluminium, clear-chromated
- For board depths up to 160 mm
- Rear equipment for installation of backplanes
- Installation width: 21 and 42 HP

Benefits at a glance

- Direct mounting on a mounting plate or a top-hat rail
- Variable cable entry from bottom/top for EMC version
- Side panels with 10 mm mounting grids for variable system assembly
- Suitable for mounting backplanes
- Optionally in EMC version



Compact dimensions in 21 HP and 42 HP



Adapter for rail mounting



Contact springs provide high EMC protection



Flange for wall-mounting

HeiPac Vario Compact 3 U, 6 U



Material/surface finish

Side panels: 2.5 mm aluminium, clear-chromated
 Horizontal rails: Extruded aluminium section, clear-chromated
 Flanges: Extruded aluminium section, clear-chromated

Supply includes

Side panels, rear trims, flanges for mounting plates or top-hat rail adaptors, EMC front/rear panels, horizontal rails, threaded inserts, insulating strips


EMC version additional includes:
 EMC gaskets, covers

Tests

Shock and vibration tested to:
 IEC 600-68-2-6 test Fc
 IEC 600-68-2-27 test Ea

Standards


HeiPac subracks are based on the system dimensions of IEC 60 297-3.

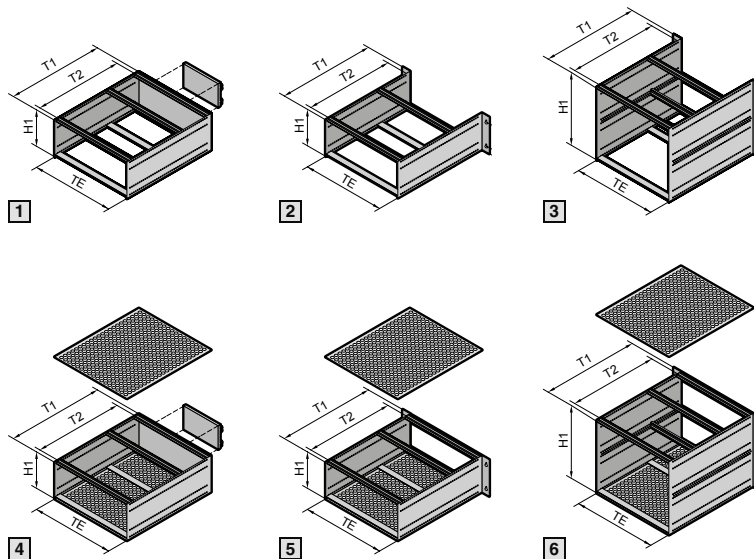

B = Width HE = U
 T = Depth TE = HP

1 4
 HeiPac Compact 3 U for top-hat rail

2 3 5 6
 HeiPac Compact 3 U for mounting plate

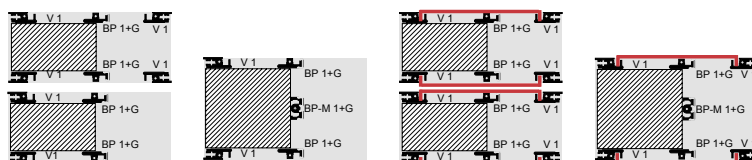

1 Top: for top-hat rail

2 Bottom: for mounting plate

3 For mounting plate

4 Top: EMC for top-hat rail

5 Bottom: EMC for mounting plate

6 EMC for mounting plate

| | | | Order No. | | | | | Order No. EMC | | | | |
|-----------------------|-------|-------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| | | | 1 | 2 | 1 | 2 | 3 | 4 | 5 | 4 | 5 | 6 |
| U | | | 3 | 3 | 3 | 3 | 6 | 3 | 3 | 3 | 3 | 6 |
| Height (H1) mm | | | 132 | 132 | 132 | 132 | 265.35 | 132 | 132 | 132 | 132 | 265.35 |
| HP | | | 21 | 21 | 42 | 42 | 42 | 21 | 21 | 42 | 42 | 42 |
| Attachment | | | Top-hat rail | Mounting plate | Top-hat rail | Mounting plate | Mounting plate | Top-hat rail | Mounting plate | Top-hat rail | Mounting plate | Mounting plate |
| Side panel (T1) mm | T2 mm | Max. PCB depth mm | For backplane | | | | | | | | | |
| 225 | 200 | 160 | 3687.667 | 3687.669 | 3687.671 | 3687.673 | 3687.680 | 3687.682 | 3687.684 | 3687.686 | 3687.688 | 3687.690 |
| 285 | 260 | 220 | 3687.668 | 3687.670 | 3687.672 | 3687.674 | 3687.681 | 3687.683 | 3687.685 | 3687.687 | 3687.689 | 3687.691 |

Other customised subrack solutions are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

SUBRACKS

HeiPac Vario COMPACT

Components, accessories and services for HeiPac Vario COMPACT

In addition to the presented subrack-kits, we offer components and accessories for your individual configuration on the following pages.


WE MEET YOUR INDIVIDUAL NEEDS!

You are looking for a product in the field of electronic packaging that is not in our catalogue? Please contact us! Due to our extensive range of services we can meet all your demands.







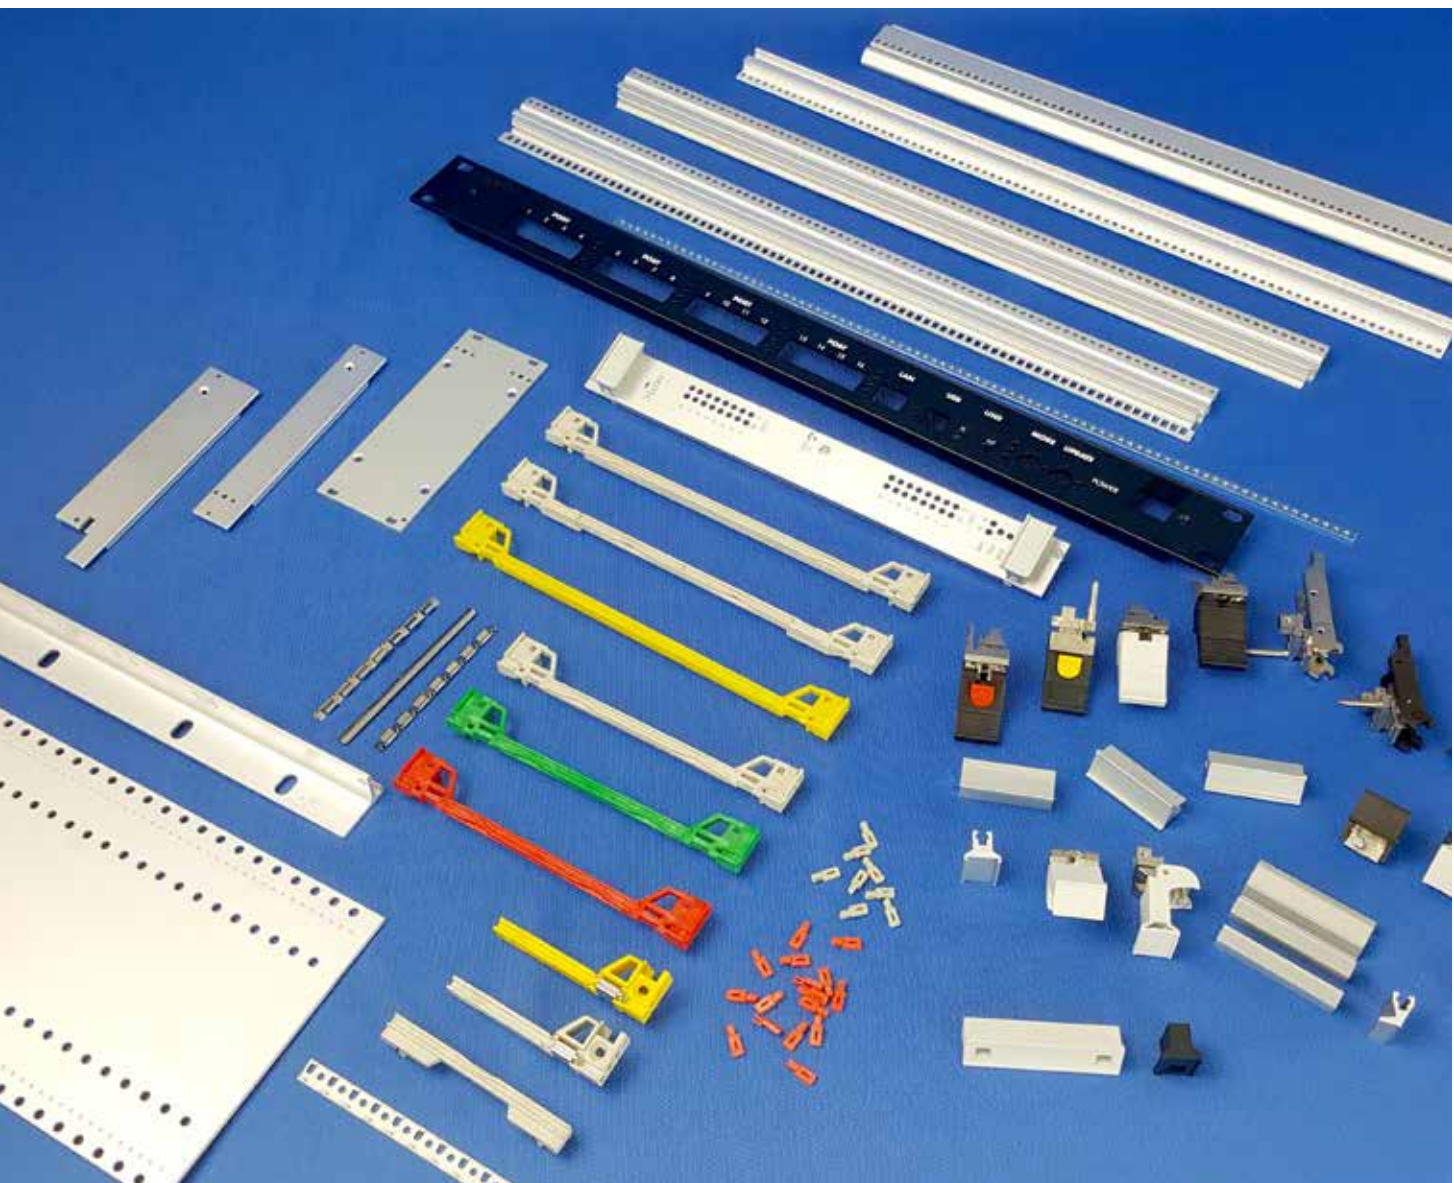
























We will gladly submit a tailored quotation.

Phone: 09126 - 29 34 0

E-Mail: eps-quote@heitec.de



Overview horizontal rails HeiPac Vario COMPACT

| Main sections | V 1 Front horizontal rail | V-Ext. 1 Front horizontal rail, with 10 mm extension, for extractor handle type IV or VII | BP 1 Rear horizontal rail | CON 1 Rear horizontal rail, with integral Z rail | BP-M 1 Rear horizontal rail, centre | CON-M 1 Rear horizontal rail, with integral Z rail (also for HeiPac EASY) |
|--|--|--|--|---|--|--|
| Additional sections | Page 70  | Page 70  | Page 71  | Page 71  | Page 72  | Page 72  |
| E Adaptor rail, rear centre, to accommodate guide rails  Page 140 | - | - | - | - |  |  |
| F Z rail for connector  Page 144 | - | - |  | - |  | - |
| G Insulating strip ¹⁾  Page 145 | - | - |  | - |  | - |
| H Conductive strip ²⁾  Page 145 | - | - |  | - |  | - |
| I Threaded insert  Page 144 |  |  | - |  | - |  |
| J Identification strips  Page 144 |  |  |  |  | - | - |
| K EMC gaskets, horizontal  Page 145 |  |  | - | - | - | - |

For ¹⁾insulated or ²⁾conductive attachment of backplanes.

All system requirements may be covered with just a few basic types of horizontal rail. A cost-effective, easy-to-manage range.

SUBRACKS HORIZONTAL RAILS HeiPac Vario COMPACT

Horizontal rail Vario V 1, front



To accommodate guide rails and for the attachment of front panels

- Front projection 2.5 mm corresponding to IEC 60 297-3-101
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 21 | 1 | 3685.985 |
| 42 | 1 | 3684.560 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300

+ Accessories

Threaded inserts, packs of 1, order no. 3684.610
see page 144

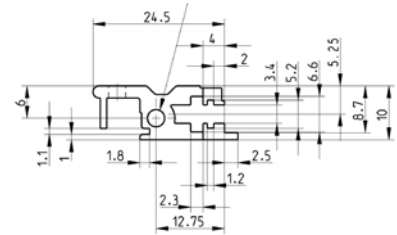

Horizontal rail Vario V-Ext. 1, front, with 10 mm extension



For type IV, IVs and VII injector/extractor handle

To accommodate guide rails and for the attachment of front panels.

- Front projection 10 mm corresponding to IEEE 1101.10 and IEC 60 297-3-102
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. unprinted | Order No. printed |
|-------------------|----------|---------------------|------------------------------|
| 42 | 1 | 3684.565 | 9921.790¹⁾ |



¹⁾ with HP pattern printing

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1
order no. 3684.610
see page 144



Horizontal rail Vario BP 1, for backplane



To accommodate guide rails and for the attachment of Z rails, insulating strips or conductive strips.

- Tapped holes M2.5 on a 1 HP pitch pattern for mounting backplanes and Z rails
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Applicable for top-mounting under covers
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 21 | 1 | 3685.991 |
| 42 | 1 | 3684.570 |

+ Also required


Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Conductive strips
see page 145
Insulating strips
see page 145
Z rail
see page 144



Horizontal rail Vario CON 1, with integral Z rail for connector

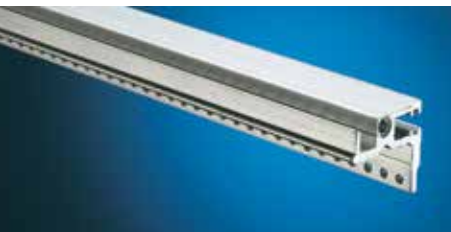

To accommodate guide rails. Integral Z rail for mounting connectors (CON) to IEC 60 603-2.

- HP pitch pattern of holes for the precise installation of guide rails
- Tapped holes M2.5 for connector mounting
- Applicable for top-mounting under covers
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 42 | 1 | 3686.191 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories


Threaded inserts, packs of 1
Order no. 3684.608
see page 144



SUBRACKS

HORIZONTAL RAILS HeiPac Vario COMPACT

Horizontal rail Vario BP-M 1, for backplane, centre

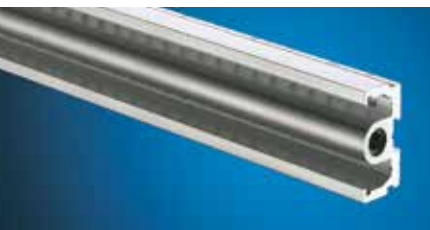

When using 6 U PCBs or box-type plug-in units. Facility for the attachment of Z rails, insulating strips or conductive strips.

- Tapped holes M2.5
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated


| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 42 | 1 | 3684.580 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Conductive strips
see page 145
Insulating strips
see page 145
Z rails
see page 144

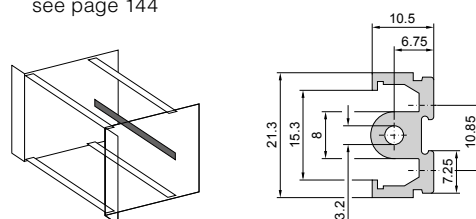

Horizontal rail Vario CON-M 1, with integral Z rail for connector, rear centre



When using 6 U PCBs or box-type plug-in units. Integral Z rail for mounting connectors (CON) to IEC 60 603-2

- Tapped holes M2.5
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section


Surface finish

Clear-chromated


| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 42 | 1 | 3687.600 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

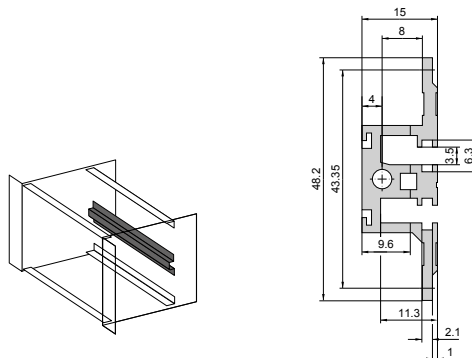

Adaptor rail, rear centre

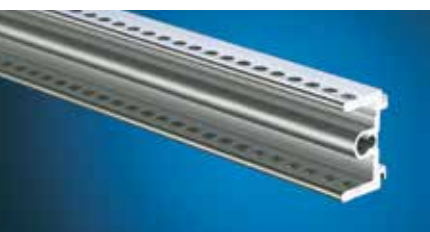

When subdividing 6 U into 2 x 3 U, the adaptor rail accommodates the guide rails when fastened to the centre horizontal rail.

- HP pitch pattern of holes for the precise installation of guide rails
- M4 and M2.5 thread on the end face
- Applicable in combination with BP-M 1, BP-M 2 and EST-M 1
- Straight-through core hole

Material

Extruded aluminium section


Surface finish

Clear-chromated


| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 42 | 1 | 3684.590 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

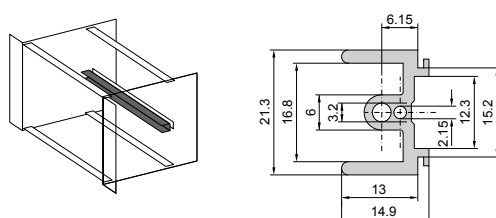

Side panels for HeiPac Vario

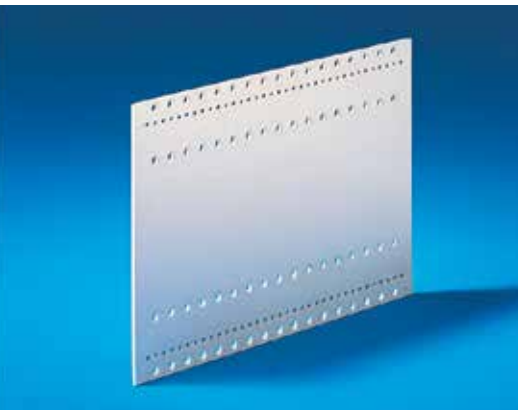



Mounting holes and anti-twist half-shears on a 10 mm pitch pattern.

Material

2.5 mm Aluminium,
Clear-chromated

| | | | Order No. | |
|-------------------------|--------------------|----------|-----------------|-----------------|
| U | | | 3 | 6 |
| T mm | a ¹⁾ mm | Packs of | | |
| 225 | 200 | 1 | 3684.512 | 3684.530 |
| 285 | 260 | 1 | 3684.514 | 3684.532 |
| Versions with PG gland: | | | | |
| 225 | 200 | 1 | 3687.746 | 3687.758 |
| 285 | 260 | 1 | 3687.747 | 3687.749 |

¹⁾ a = Distance between the first and last mounting hole.



Mounting blocks for cover plates



For mounting covers, versions 1 – 4, on the subrack side panel.

Material

Die-cast zinc

Surface finish

Nickel-plated

Note

For EMC applications, mounting blocks must be fitted across the entire subrack depth. The table here shows the number of mounting blocks required to install 1 cover plate with EMC shielding.


| | Packs of | Order No. |
|------------------------------|----------|-----------------|
| Mounting blocks 28.5 mm long | 10 | 3684.234 |

| Number of mounting blocks for max. EMC protection | Cover plate depth mm |
|---|----------------------|
| 4 | 142 |
| 8 | 192 |
| 10 | 212 |
| 12 | 252 |
| 14 | 272 |
| 16 | 312 |
| 18 | 332 |
| 20 | 372 |
| 24 | 432 |
| 28 | 492 |
| 32 | 552 |


EMC

+ Also required

Assembly screws M3 x 6, packs of 100, order no. 3684.233, see page 202

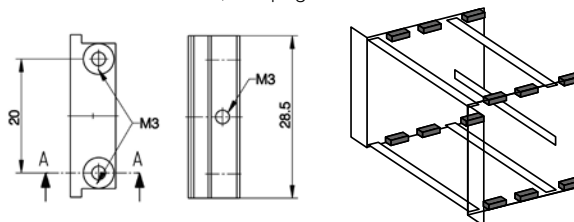

Flange 19" for HeiPac Vario COMPACT, for applications with mounting plate

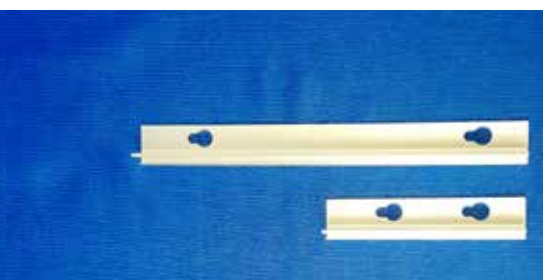

Material

Extruded aluminium section

Surface finish

Clear-chromated

| U | | Packs of | Order No. | |
|-------|--|----------|-----------------|-----------------|
| | | | 3 | 6 |
| left | | 1 | 3687.776 | 3687.800 |
| right | | 1 | 3687.743 | 3687.777 |

NEW

SUBRACKS COVERS HeiPac Vario COMPACT

Covers version 1



For all HeiPac Vario subracks

To cover the overall-subrack depth
(EMC application) or as connector protection

- Flat design for top and bottom
- Optionally solid or perforated
- For mounting on the subrack side panel with the aid of mounting blocks

Material

1.0 mm aluminium, unplated, hole diameter 4 mm in perforated version.

Supply includes

1 cover plate



Note

For EMC applications, additional mounting blocks must be fitted across the entire subrack depth.


| | | | Order No. | |
|----|-----------------------------|---------------------|-----------------|-----------------|
| | | | Single piece | |
| HP | For side panel depth (T) mm | Cover depth (d1) mm | Perforated | Solid |
| 21 | 225 | 192 | 3687.618 | 3687.620 |
| 21 | 285 | 252 | 3687.619 | 3687.621 |
| 42 | 225 | 192 | 3687.623 | 3687.627 |
| 42 | 285 | 252 | 3685.642 | 3687.629 |

+ Also required

Mounting blocks, see page 148
EMC gaskets for cover plates, see page 147
Assembly screws, packs of 100, order no. 3684.233
see page 202



Covers version 2

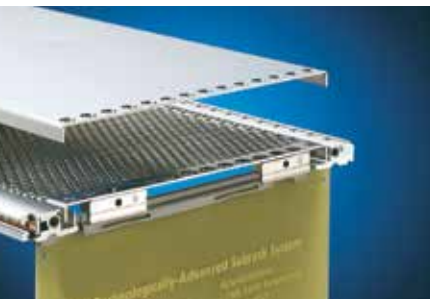

For all HeiPac Vario subracks

To cover the PCB depth

- Flat design for top and bottom
- Optionally solid or perforated
- For mounting on the subrack side panel with the aid of mounting blocks

Material

1.0 mm aluminium, unplated, hole diameter 4 mm in perforated version



Supply includes

1 cover plates

| | | | Order No. | |
|----|-----------------------------|---------------------|-----------------|-----------------|
| | | | Single piece | |
| HP | For side panel depth (T) mm | Cover depth (d1) mm | Perforated | Solid |
| 21 | 160 | 142 | 3687.630 | 3687.634 |
| 21 | 220 | 202 | 3687.631 | 3687.635 |
| 42 | 160 | 142 | 3684.957 | 3687.626 |
| 42 | 220 | 202 | 3687.633 | 3687.637 |

+ Also required

Mounting blocks, see page 148
Assembly screws, packs of 100, order no. 3684.233
see page 202



Top-hat rail adapter



NEW

Top-hat rail adapter to directly mount a component or device on a top-hat rail


Material

Extruded aluminium section


| Packs of | Order No. |
|----------|-----------------|
| 1 | 3687.739 |

+ Also required

Assembly screws ,packs of 100
Order no. 3606.550
see page 202

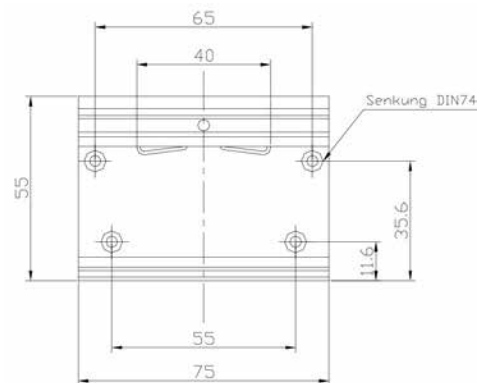

Back panel for top-hat rail mounting

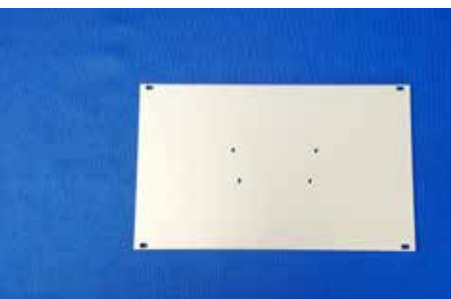

NEW

For HeiPac Vario COMPACT subracks

For top-hat rail mounting of subracks

Material

Aluminium, clear-chromated

| | | Order No. | |
|----------|----------|-----------------|-----------------|
| U | | 3 | 3 |
| Width HP | Packs of | Non-EMC | EMC |
| 21 | 1 | 3687.742 | 3687.750 |
| 42 | 1 | 3687.744 | 3687.751 |

+ Also required


Top-hat rail adapter, packs of 1
Order no. 3687.739
see page 75

Additional accessories see page

- EMC Accessories** → 146
- Guide rails** → 154
- Front panels** → 165
- Mounting kits** → 150
- Assembly parts** → 202

SUBRACKS

HeiPac Vario HEAVY

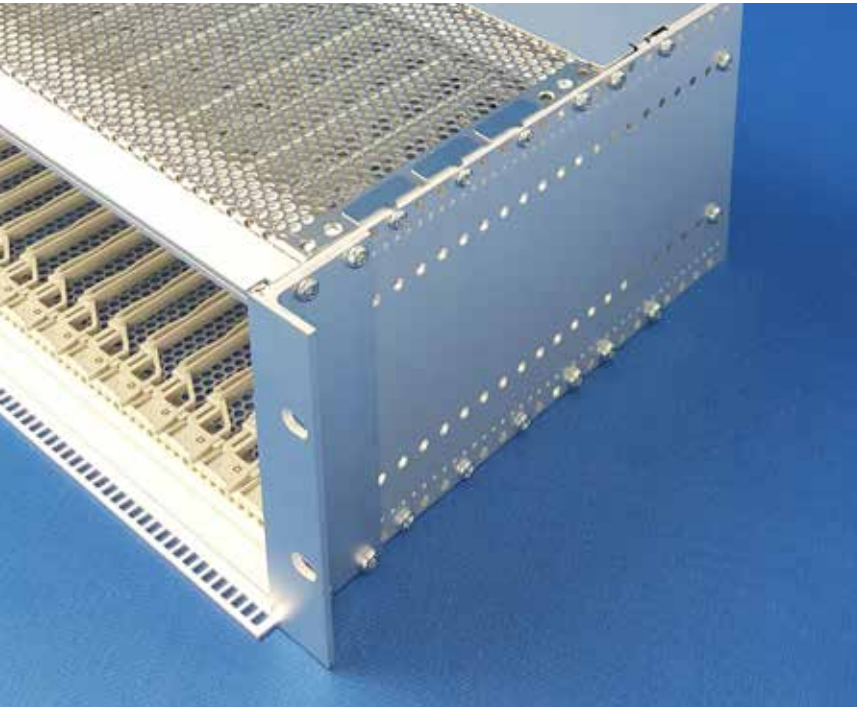

For mobile applications and tough ambient conditions

Applications

The HeiPac Vario HEAVY is a subrack system designed especially for mobile applications and tough ambient conditions.

The subrack system is shock and vibration-tested in accordance with EN 50 155 and DIN EN 61587-2, and is designed to accommodate standardised PCBs.

Technical specifications

- rack-mount system in accordance with IEC 60 297-3
- 3 and 6 U
- Clear-chromated aluminium side panels
- For card formats up to 220 mm deep
- Front horizontal rails with 10 mm extension for injector/extractor handles
- Horizontal rails with double screw fastening
- Reinforced mounting flange
- Rear equipment for installation of backplanes
- Installation width: 84 HP

Benefits at a glance

- Side panels with 10 mm mounting grids for variable system assembly
- For mounting backplanes
- Optionally in EMC version

NEW




Extensive accessories allow for a wide range of expansion options



Horizontal rails with double screw fastening provide high mechanical strength



Reinforced flange ensures high resistance to shock and vibrations

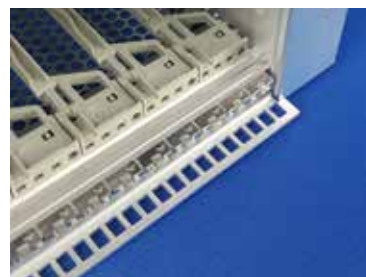

EMC can be retrofitted


Shock/vibration profile HeiPac HEAVY

Shock/vibration testing in accordance with : IEC 61587-1


DL2V/DL2S for use in different locations

Shock/vibration testing in accordance with : EN 50155

EN 61373, category 1, class B

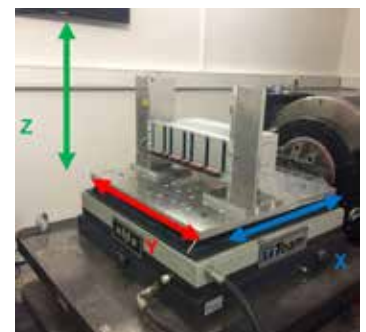

HeiPac Vario HEAVY 3 U, 6 U

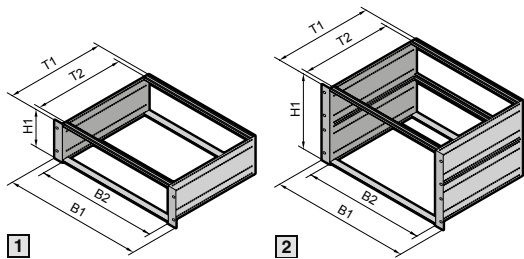

Material/surface finish

Side panels: 2.5 mm Aluminium, clear-chromated
 Horizontal rails: Extruded aluminium section, clear-chromated
 Flanges: Extruded aluminium section, clear-chromated

Supply includes


Side panels, flanges, horizontal rails, threaded inserts, assembly screws

Tests

Shock and vibration tested in accordance with:
 DIN EN 61587-2
 EN 50 155

Standards

HeiPac subracks are based on the system dimensions of IEC 60 297-3.

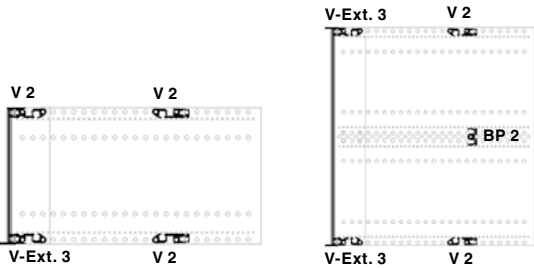

| | | | Order No. without handle holes | | Order No. with handle holes | |
|-----------------------|-------|-------------------|-----------------------------------|----------|--------------------------------|----------|
| | | | 1 | 2 | 1 | 2 |
| U | | | 3 | 6 | 3 | 6 |
| Height (H1) mm | | | 132 | 265.35 | 132 | 265.35 |
| HP | | | 84 | 84 | 84 | 84 |
| Side panel (T1) mm | T2 mm | Max. PCB depth mm | | | | |
| 245 | 220 | 160 | 9921.860 | 9921.862 | 9921.864 | 9921.866 |
| 305 | 280 | 220 | 9921.861 | 9921.863 | 9921.865 | 9921.867 |

Other customised subrack solutions are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

SUBRACKS

HORIZONTAL RAILS HeiPac Vario HEAVY

Horizontal rail Vario V 2, front, with double screw fastening



To accommodate guide rails and for the attachment of front panels. The double screw fastening ensures a high level of stability even under extreme loads.

- Front projection 2.5 mm corresponding to IEC 60 297-3-101
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole
- Load test to DIN EN/IEC 61 587-1, requirement level SL1
- Shock and vibration tests undertaken as per IEC 61 373 (DIN EN 50 155), Category 1, Class B

Material

Extruded aluminium section

Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. unprinted | Order No. printed |
|-------------------|----------|---------------------|------------------------|
| 84 | 1 | 9908.721 | 9921.793 ¹⁾ |


¹⁾ with HP pattern printing

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1
order no. 3684.610
see page 144

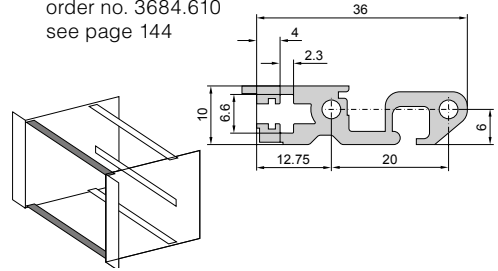

Horizontal rail Vario V-Ext. 3, with 10 mm extension and double screw fastening, front



For type IV, IVs and VII injector/extractor handle

To accommodate guide rails and for the attachment of front panels. The double screw fastening ensures a high level of stability even under extreme loads.

- Front projection 10 mm corresponding to IEEE 1101.10 and IEC 60 297-3-102
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. unprinted | Order No. printed |
|-------------------|----------|---------------------|------------------------|
| 84 | 1 | 9908.722 | 9921.795 ¹⁾ |


¹⁾ with HP pattern printing

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1, order no. 3684.610
see page 144

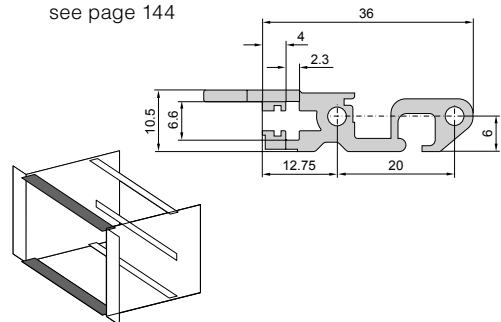

Horizontal rail Vario BP 2, for backplane



To accommodate guide rails and for the attachment of Z rails, insulating strips or conductive strips. The double screw fastening ensures a high level of stability even under extreme loads.

- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- For mounting backplanes/Z rails additional threaded inserts (9901.816) are required
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated


| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------|
| 84 | 1 | 9908.723 |

+ Also required


Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1, order no. 9901.816
see page 144

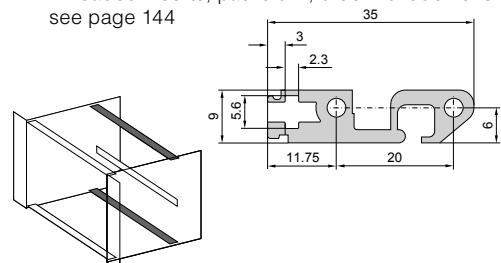

Side panels for HeiPac Vario

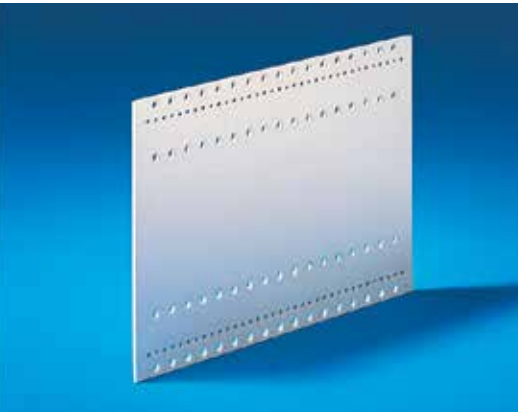


Mounting holes and anti-twist half-shears on a 10 mm pitch pattern.

Material


2.5 mm Aluminium
Clear-chromated

| | | | Order No. | |
|------|--------------------|----------|-----------------|-----------------|
| U | | | 3 | 6 |
| T mm | a ¹⁾ mm | Packs of | | |
| 245 | 220 | 1 | 3684.513 | 3684.531 |
| 305 | 280 | 1 | 3684.515 | 3684.533 |

¹⁾ a = Distance between the first and last mounting hole.

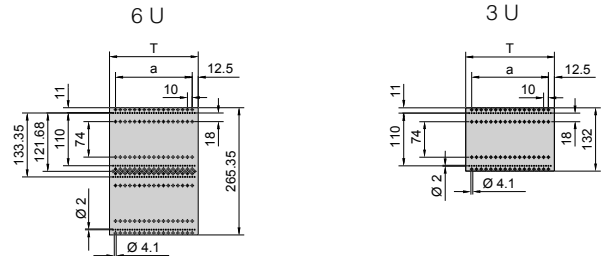

Reinforced flanges 19" for HeiPac Vario



Reinforced flange ensures a high level of stability even under extreme loads.

Material

Extruded aluminum section
3 mm material thickness



Surface finish

Clear-chromated

| | | Order No. | |
|---|----------|-------------------|----------------------|
| U | Packs of | with handle holes | without handle holes |
| 3 | 1 | 9921.725 | 9914.268 |
| 6 | 1 | 9921.726 | 9921.721 |


+ Accessories

Handles for subrack
see page 81



NEW

Mounting clips for cover plates



For mounting covers on the sub-rack side panel

Compatible with cover plate versions 1-4 and the ECO and EASY versions, and with sheet metal blanks 0.8-1.0 mm thick. For EMC applications, mounting clips must be fitted across the full depth of the subrack.



Material

Stainless steel

| Length mm | n | Packs of | Order No. |
|-----------|---|----------|-----------------|
| 30 | 1 | 1 | 3688.109 |
| 90 | 3 | 1 | 9921.722 |
| 120 | 4 | 1 | 9921.883 |
| 150 | 5 | 1 | 9921.723 |
| 180 | 6 | 1 | 9921.884 |
| 210 | 7 | 1 | 9921.724 |
| 240 | 8 | 1 | 9921.885 |

+ Also required

Assembly screws, order no. 9921.879

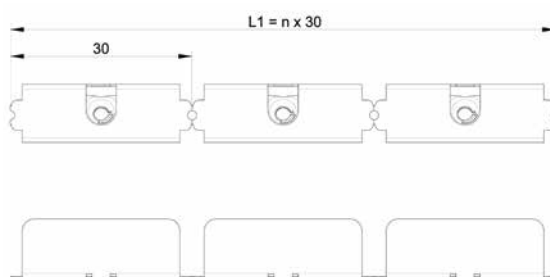

EMC

SUBRACKS COVERS HeiPac Vario HEAVY

Covers version 1



For all HeiPac Vario subracks

To cover the overall-subrack depth
(EMC application) or as connector protection

- Flat design for top and bottom
- Optionally solid or perforated
- For mounting on the subrack side panel with the aid of mounting blocks

Material

1.0 mm aluminium, unplated, hole diameter 4 mm in perforated version.

Supply includes

1 cover plate

Note

For EMC applications, additional mounting blocks must be fitted across the entire subrack depth.



| | | | Order No. | |
|----|-----------------------------|---------------------|-----------------|-----------------|
| | | | Single piece | |
| HP | For side panel depth (T) mm | Cover depth (d1) mm | Perforated | Solid |
| 84 | 245 | 212 | 3684.695 | 3684.684 |
| 84 | 305 | 272 | 3685.852 | 3684.686 |

+ Also required


Mounting blocks, see page 148

EMC gaskets for cover plates, see page 147

Assembly screws, packs of 100, order no. 3684.233, see page 202



Covers version 2

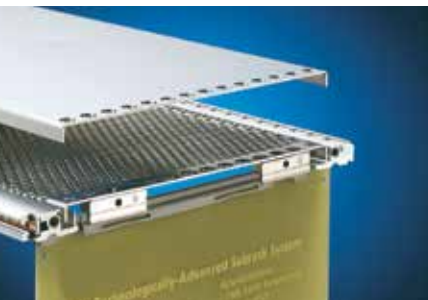

For all HeiPac Vario subracks

To cover the PCB depth

- Flat design for top and bottom
- Optionally solid or perforated
- For mounting on the subrack side panel with the aid of mounting blocks

Material

1.0 mm aluminium, unplated, hole diameter 4 mm in perforated version

Supply includes



1 cover plates

| | | | Order No. | |
|----|-----------------------|---------------------|-----------------|-----------------|
| | | | Single piece | |
| HP | For PCB depth (d2) mm | Cover depth (d1) mm | Perforated | Solid |
| 84 | 160 | 142 | 3684.681 | 3684.680 |
| 84 | 220 | 202 | 3685.851 | 3685.813 |


+ Also required

Mounting blocks, see page 148

Assembly screws, packs of 100, order no. 3684.233, see page 202



Back cover for HeiPac Vario

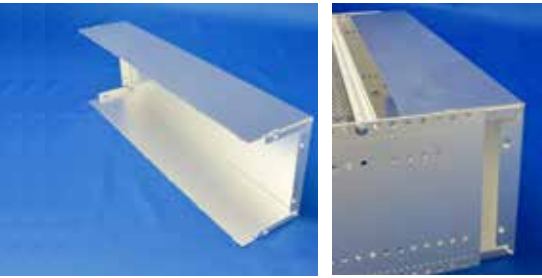

NEW

Ensures cover for back of subrack

Material

Aluminium

Surface finish

Clear-chromated

Note


The side panel depth required is obtained by taking the length of the plug-in units used, and adding 85 mm (refer to table).

A precondition is the use of a horizontal rail that allows room for additional construction.

| U | Packs of | Order No. |
|---|----------|-----------------|
| 3 | 1 | 9921.685 |
| 6 | 1 | 9921.710 |

| PCB depth mm | Side panel depth mm |
|--------------|---------------------|
| 160 | 245 |
| 220 | 305 |
| 280 | 365 |

Horizontal rail that allows room for additional construction

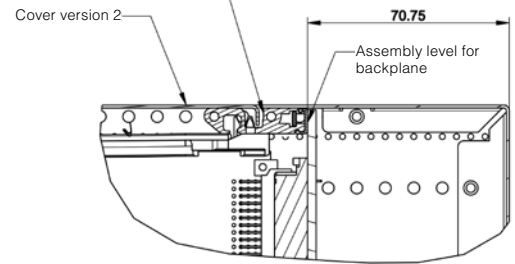

Handles for HeiPac subracks



For fitting on the subrack flange with handle holes and on all component shelves.

Material

Die-cast zinc


Supply includes

Assembly parts

Surface finish

Spray-finished, silver-grey

| For | L1 | L2 | Packs of | Order No. |
|----------------------|-------|-------|----------|-----------------|
| Subracks 3 U and 4 U | 114.5 | 130.5 | 2 | 3636.010 |
| Subracks 6 U and 7 U | 248 | 264 | 2 | 3666.010 |

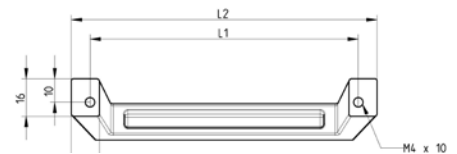

Additional accessories see page

- EMC Accessories** → 146
- Guide rails** → 154
- Front panels** → 165
- Mounting kits** → 150
- Assembly parts** → 202

SUBRACKS

HeiPac EASY



Economical, sturdy 19" subrack system

Applications

Subrack system for standard applications or high mechanical loads. In cases that require easy handling and fast assembly. Suitable for installation of standardised PCBs or plugin units up to 400 mm depth.

Technical specifications

- 482.6 mm (19") subrack according to IEC 60 297-3
- 3 and 6 U
- For board depths: 160 mm, 220 mm, 280 mm, 340 mm, 400 mm
- Fast and easy assembly due to pre-assembled screws and longitudinal holes in the side panels
- Top covers easily retractable
- Horizontal rails with double screwed joint
- Material: aluminium, noncorrosive
- 60 mm mounting grids for horizontal rails
- Rear horizontal rails with integrated contact surface
- Rear equipment for installation of backplanes or connectors
- Separate 19" flanges

Benefits at a glance

- Fast and easy handling by pre-assembled screws in the horizontal rails
- Top covers retractable
- Horizontal rails with integrated contact surface (insulating strips cannot be used)
- Double screw joints of horizontal rails ensure stability even for high loads



Rails with double screw for heavy loads



Top covers easily to retract



Horizontal rails with optional double screwing ensure a higher mechanical resistance



EASY to handle and yet extremely versatile

Requirement Profile HeiPac EASY

EN 61587-1; Requirement Category C2

Climatic tests: cold, dry and damp heat, cyclic

EN 61587-1; Requirement Category A1

Industrial climate


IEC 61587-1; Requirement Category SL1

Mechanical tests: mechanical loads (static)

IEC 61587-1; Requirement Category DL1

Mechanical loads, industrial applications (dynamic)

HeiPac EASY 3 U, 6 U, Aluminium

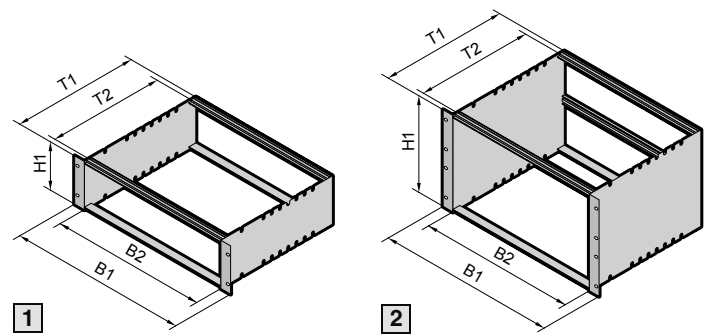

Material/surface finish

Side panels: 2 mm aluminium, unplated
Horizontal rails: extruded aluminium section, noncorrosive
Flanges: pre-anodised

Supply includes

Side panels, flanges, horizontal rails incl. pre-mounted threaded inserts and assembly screws

Tests


Shock- and vibration tested to:
IEC 600-68-2-6 test Fc
IEC 600-68-2-27 test Ea

Standards

HeiPac subracks are based on the system dimensions of IEC 60 297-3

Note

Backplanes can be mounted directly on the rear horizontal rails. Isolating strips cannot be used.

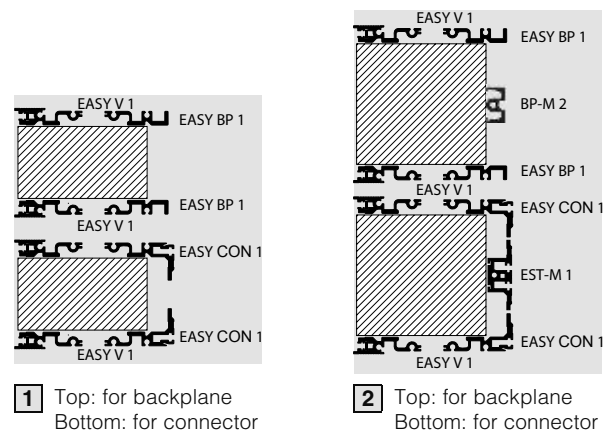

| | | | | | Order No. | | | |
|-------------|-------|--------------------|-------|-------------------|-----------------|----------------------------|-----------------|----------------------------|
| | | | | | 1 | | 2 | |
| U (H1) | | | | | 3 | 6 | | |
| B1 mm | B2 HP | Side panel (T1) mm | T2 mm | Max. PCB depth mm | For backplane | For connector IEC 60 603-2 | For backplane | For connector IEC 60 603-2 |
| 482.6 (19") | 84 | 175 | 160 | 160 | 3634.100 | 3634.150 | 3634.180 | 3634.230 |
| | | 235 | 220 | 220 | 3634.110 | 3634.160 | 3634.190 | 3634.240 |
| | | 295 | 280 | 280 | 3634.120 | 3634.170 | 3634.200 | 3634.250 |
| | | 355 | 340 | 340 | 3634.130 | - | 3634.210 | - |
| | | 415 | 400 | 400 | 3634.140 | - | 3634.220 | - |

Other customised subrack solutions are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

In addition to the presented subrack-kits, we offer components and accessories for your individual configuration on the following pages.


WE MEET YOUR INDIVIDUAL NEEDS!

You are looking for a product in the field of electronic packaging that is not in our catalogue? Please contact us! Due to our extensive range of services we can meet all your demands.








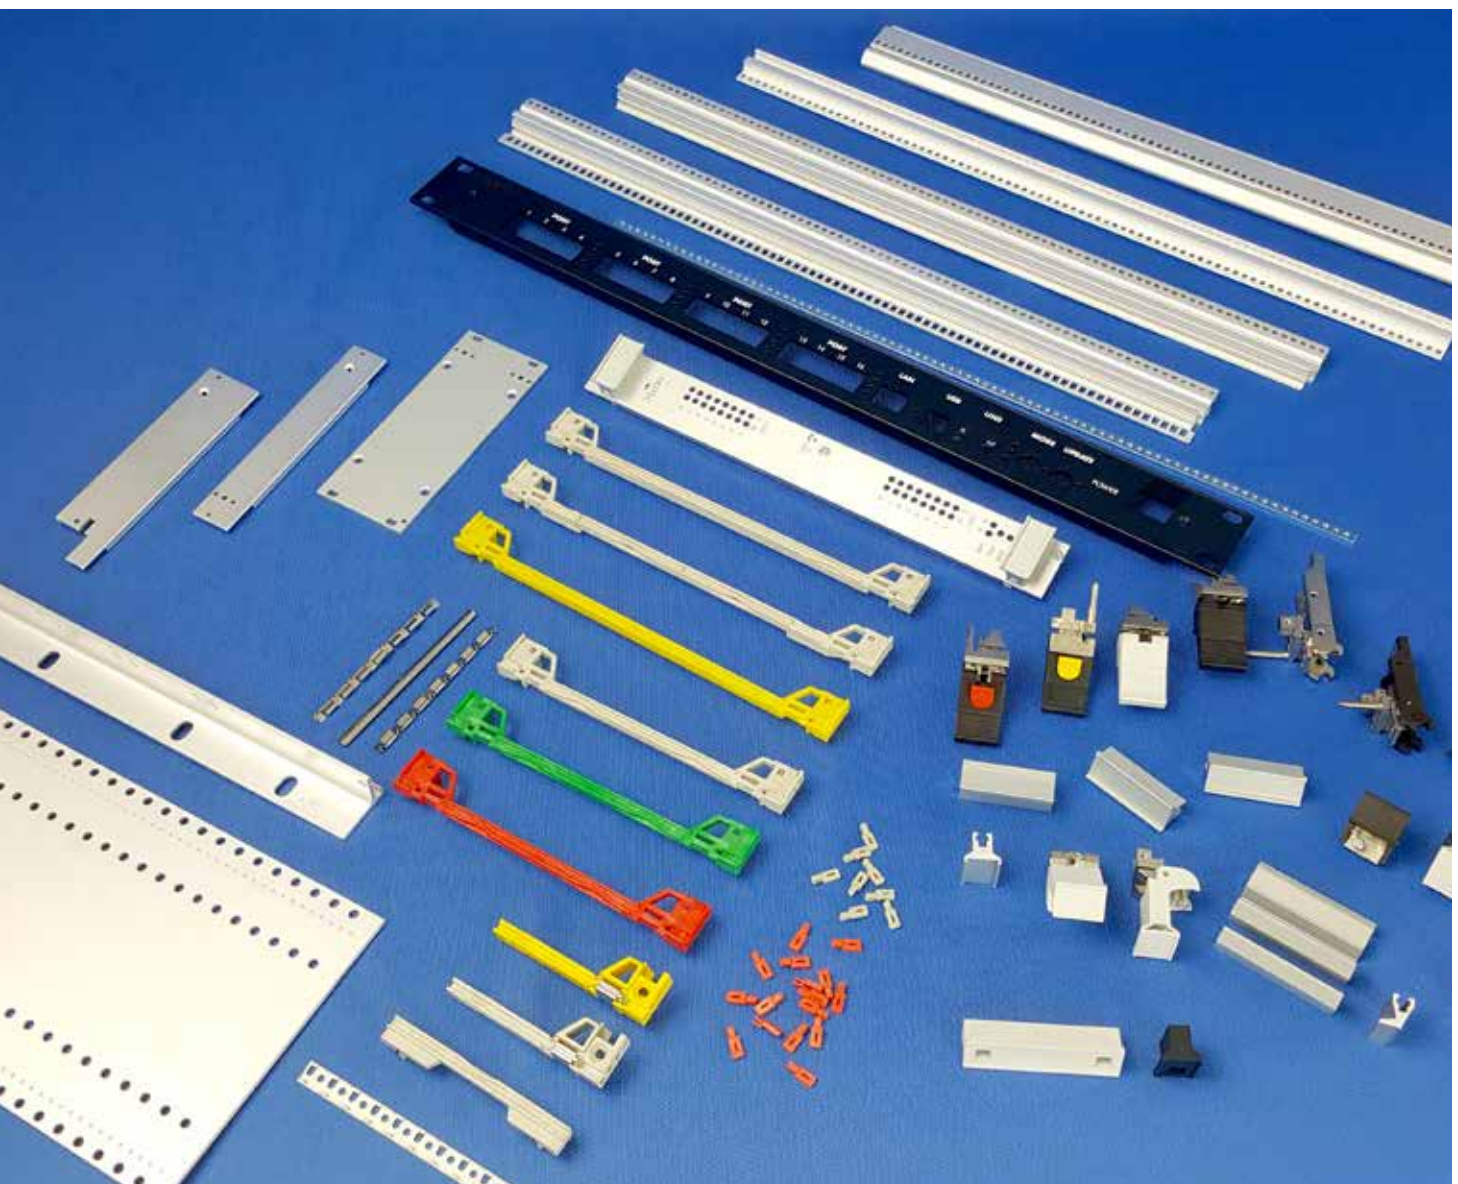











We will gladly submit a tailored quotation.

Phone: 09126 - 29 34 0





E-Mail: eps-quote@heitec.de



Overview horizontal rails HeiPac EASY

| Main sections | EASY V 1 Front horizontal rail, with double screw fastening | EASY BP 1 Rear horizontal rail, with double screw fastening, for mounting backplanes | EASY CON 1 Rear horizontal rail, with double screw fastening, with integral Z rail | Vario CON-M 1 Rear horizontal rail, with integral Z rail | Vario BP-M 2 Rear horizontal rail, centre | EASY H 1 Rear horizontal rail, with double screw fastening, for mounting rear panels |
|--|---|---|---|--|---|---|
| | Page 86 | Page 88 | Page 87 | Page 88 | Page 86 | Page 87 |
| |  |  |  |  |  |  |
| Additional sections | | | | | | |
| E Adaptor rail, rear centre, to accommodate guide rails  Page 140 | - | - | - |  |  | - |
| F Z rail for connector  Page 144 | - | - | - | - | - | - |
| G Insulating strip ¹⁾  Page 145 | - | - | - | - | - | - |
| H Conductive strip ²⁾  Page 145 | - | - | - | - | - | - |
| I Threaded insert  Page 144 |  | - |  |  | - |  |
| J Identification strips  Page 144 | - | - | - | - | - | - |
| K EMC gaskets, horizontal  Page 145 | - | - | - | - | - | - |

For ¹⁾insulated or ²⁾conductive attachment of backplanes.

| Description old | Description new | Main sections | Description old | Description new | Main sections |
|-----------------|-----------------|---|-----------------|-----------------|---|
| A | V 1 |  | C7 | CON 1 |  |
| A1 | BP 1 |  | - | H 1 |  |

SUBRACKS

HORIZONTAL RAILS HeiPac EASY

Horizontal rail EASY V 1, with double screw fastening, front



To accommodate guide rails and for the attachment of front panels

- Pre-assembled screws M 4x16 for fast mounting on the subrack side panel
- Front excess length 2.5 mm corresponding to IEC 60 297-3
- HP pitch pattern of holes for the precise installation of guide rails
- On request with double screw fastening to ensure a high stability
- M4 thread on end face
- Straight-through core hole for optional double screw fastening

Material

Extruded aluminium section

Surface finish

Non-corrosive

Supply includes



2 horizontal rails with pre-assembled threaded inserts and screws M4 x 16

| Usable width (HP) | Packs of | Order No. unprinted | Order No. printed |
|-------------------|----------|---------------------|------------------------|
| 84 | 2 | 3634.600 | 9921.803 ¹⁾ |

¹⁾ with HP pattern printing


+ Also required

Assembly screws M4 x 16 for double screw fastening, order no. 3634.430 (packs of 100)



1 Core hole M4

Horizontal rail Vario BP-M 2, for backplane, centre

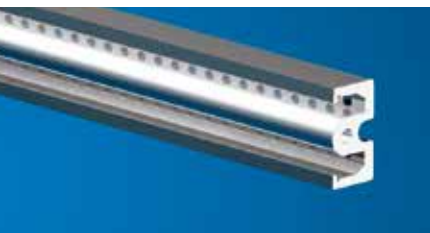

When using 6 U PCBs or box-type plug-in units. Facility for the attachment of Z rails or backplanes.

- Tapped holes M2.5
- M4 thread on end face
- Straight-through core hole
- Due to integrated contact area, insulating strips cannot be used



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------|
| 84 | 1 | 9912.523 |

Material

Extruded aluminium section

Surface finish

Clear-chromated



Horizontal rail EASY H 1, with double screw fastening, for mounting rear panels



To accommodate rear front panels

- With channel for mounting top covers see page 164 Covers EASY version 2
- On request with double screw fastening to ensure a high stability
- Straight-through core hole for optional double screw fastening
- M4 thread on end face
- Pre-assembled screws M 4x16 for fast mounting on the subrack side panel

Material

Extruded aluminium section

Surface finish

Non-corrosive


Supply includes

2 horizontal rails with threaded inserts and screws M4 x 16

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 3634.510 |

+ Also required

Assembly screws M4 x 16 for double screw fastening, order no. 3634.430 (packs of 100)

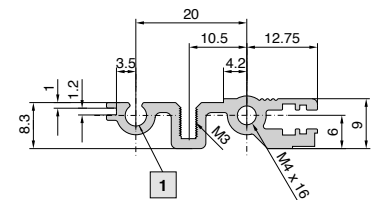

1 Core hole M4

Horizontal rail EASY CON 1, with integral Z rail for connector, with double screw fastening



To accommodate guide rails, integral Z rail for the attachment of connectors (CON)

- Pre-assembled screws M 4x16 for fast mounting on the subrack side panel
- On request with double screw fastening to ensure a high stability
- HP pitch pattern of holes for precise mounting of guide rails
- M4 thread on end face
- Straight-through core hole for optional double screw fastening
- Height of the profile allows cover extension

Material

Extruded aluminium section

Surface finish

Non-corrosive

Supply includes

2 horizontal rails with pre-assembled screws M4 x 16



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 2 | 3634.620 |

+ Also required

Threaded inserts, packs of 1, order no. 9901.816 see page 144

+ Also required

Assembly screws M4 x 16 for double screw fastening, order no. 3634.430 (packs of 100)

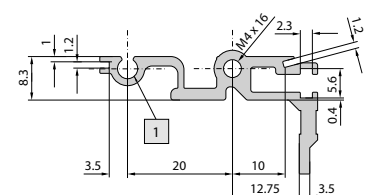

1 Core hole M4

SUBRACKS

HORIZONTAL RAILS HeiPac EASY

Horizontal rail EASY BP 1, with double screw fastening, for backplane



To accommodate guide rails and for the attachment of backplanes

- Pre-assembled screws M 4x16 for fast mounting on the subrack side panel
- Due to integrated contact area, insulating strips cannot be used
- Tapped holes M2.5 in 1 HP pitch pattern for mounting backplanes
- HP pitch pattern of holes for the precise installation of guide rails
- On request with double screw fastening to ensure a high stability
- M4 thread on end face
- Height of the profile allows cover extension
- Straight-through core hole for optional double screw fastening

Material


Extruded aluminium section

Surface finish

Non-corrosive

Supply includes


2 horizontal rails with pre-assembled threaded inserts and screws M4 x 16



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 2 | 3634.615 |

+ Also required

Assembly screws M4 x 16 for double screw fastening, order no. 3634.430 (packs of 100)

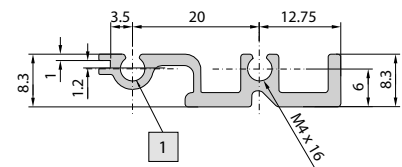

1 Core hole M4

Horizontal rail Vario CON-M 1, with integral Z rail for connector, rear centre



When using 6 U PCBs or box-type plug-in units. Integral Z rail for mounting connectors (CON) to IEC 60 603-2

- Tapped holes M2.5
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section



Surface finish

Anodised


Supply includes

1 horizontal rail
2 assembly screws

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 3634.085 |



Side panels for HeiPac EASY

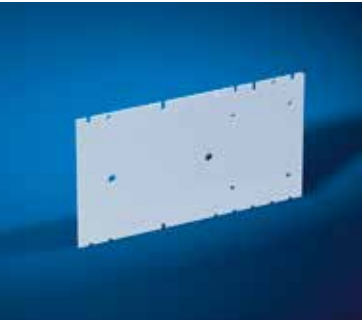

Mounting holes on a 60 mm pitch pattern as long holes
Drill holes for mounting telescopic slides

Material



2 mm Aluminium
Non-corrosive

- 1 Mounting holes suitable for threaded insert PEM-FM4-1 for mounting telescopic slides

| d (T) mm | L2 | n | n1 | Packs of | Max. board depth mm | Order No. | |
|-------------|----|---|----|----------|------------------------|-----------|----------|
| | | | | | | 3 U | 6 U |
| 175 | - | - | - | 2 | 160 | 3634.695 | 3634.720 |
| 235 | 60 | - | - | 2 | 220 | 3634.700 | 3634.725 |
| 295 | 60 | 2 | 2 | 2 | 280 | 3634.705 | 3634.730 |
| 355 | 60 | 3 | 3 | 2 | 340 | 3634.710 | 3634.735 |
| 415 | 60 | 4 | 3 | 2 | 400 | 3634.715 | 3634.740 |

+ Accessories

Flanges for HeiPac EASY
see page 129

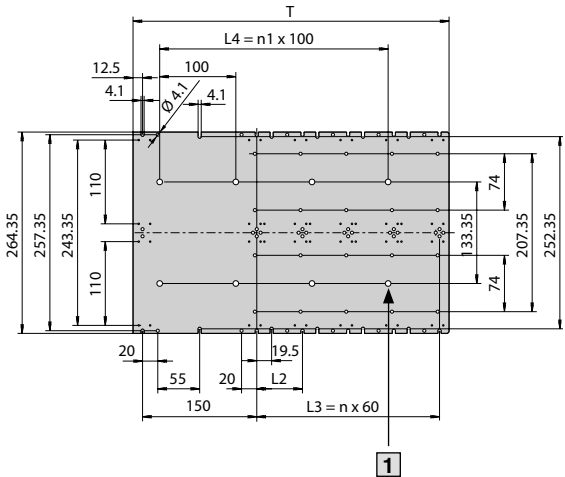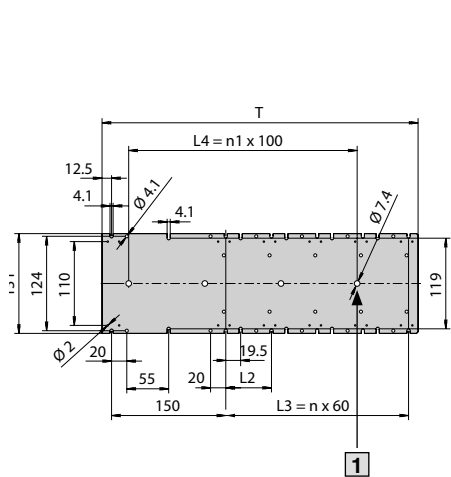

Flanges 19" for HeiPac EASY



Integrated mounting holes for installation of handles

Material

Extruded aluminium profiles


Surface finish

Pre-anodised

| U | Packs of | Order No. |
|---|----------|-----------|
| 3 | 2 | 3634.745 |
| 6 | 2 | 3634.750 |

+ Accessories

Handles for subrack
see page 90



SUBRACKS RECOMMENDED ACCESSORIES HeiPac EASY

Covers for HeiPac EASY



- Perforated or solid
- Optionally with screwed fastening clips on the side panels for additional support

Material

Aluminium

Supply includes

2 cover plates



Cover plates

version 1 (slide-in)

The covers are simply slid into the front and rear horizontal rails for mounting backplanes/connectors.

version 2 (slide-in/screw-in)

For mounting additional rear horizontal rails on the rear panels. The horizontal rails for backplane/connector assembly are top-mounted. The covers are slid in the front horizontal rails and screwed in the rear horizontal rails for rear panel mounting.



Version 1

| HP | For side panel depth mm | Order No. | |
|----|-------------------------|-----------------|-----------------|
| | | Perforated | Solid |
| 84 | 175 | 3634.685 | 3634.675 |
| 84 | 235 | 3634.690 | 3634.680 |

Version 2

| HP | For side panel depth mm | Order No. | |
|----|-------------------------|--------------------------|---------------------|
| | | Perforated ¹⁾ | Solid ¹⁾ |
| 84 | 175 | 3634.650 | 3634.625 |
| 84 | 235 | 3634.655 | 3634.630 |
| 84 | 295 | 3634.660 | 3634.635 |
| 84 | 355 | 3634.665 | 3634.640 |
| 84 | 415 | 3634.670 | 3634.645 |

+ Also required

¹⁾ assembly screws, packs of 100
order no. 3684.233
see page 202

+ Accessories

Fastening clips
see page 148

| Packs of | Order No. |
|----------|-----------------|
| 50 | 3634.450 |

Fastening clips

| Packs of | Order No. |
|----------|-----------------|
| 100 | 9921.879 |

Handles for HeiPac subracks



For fitting on the subrack flange with handle holes and on all component shelves.

Material

Die-cast zinc


Supply includes

Assembly parts


Surface finish

Spray-finished, silver-grey

| For | L1 | L2 | Packs of | Order No. |
|----------------------|-------|-------|----------|-----------------|
| Subracks 3 U and 4 U | 114.5 | 130.5 | 2 | 3636.010 |
| Subracks 6 U and 7 U | 248 | 264 | 2 | 3666.010 |

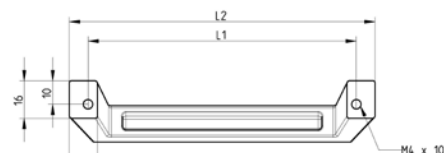

Fixing for HeiPac top-hat rail version 1

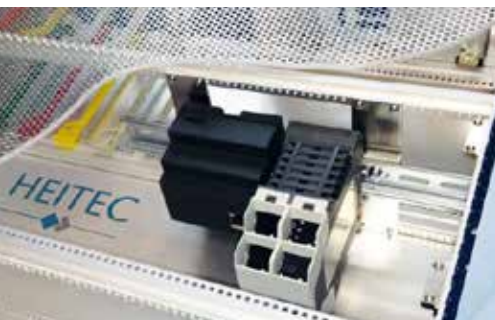

NEW

Rail holder to mount a top-hat rail on the horizontal subrack rails


Material

Rail holder: Aluminium, not surface-coated
Top-hat rail: steel, zinc-plated

Supply includes

2 rail holders
1 top-hat rail, perforated
Assembly parts

| Height | HS | L1 | L2 | Packs of | Order No. |
|--------|----|-----|-----|----------|----------------|
| 3 U | 35 | 100 | 7.5 | 1 | 9918814 |
| 3 U | 35 | 200 | 7.5 | 1 | 9918815 |
| 3 U | 35 | 300 | 7.5 | 1 | 9918816 |
| 3 U | 35 | 400 | 7.5 | 1 | 9918817 |
| 3 U | 35 | 100 | 15 | 1 | 9918818 |
| 3 U | 35 | 200 | 15 | 1 | 9918819 |
| 3 U | 35 | 300 | 15 | 1 | 9918820 |
| 3 U | 35 | 400 | 15 | 1 | 9918821 |

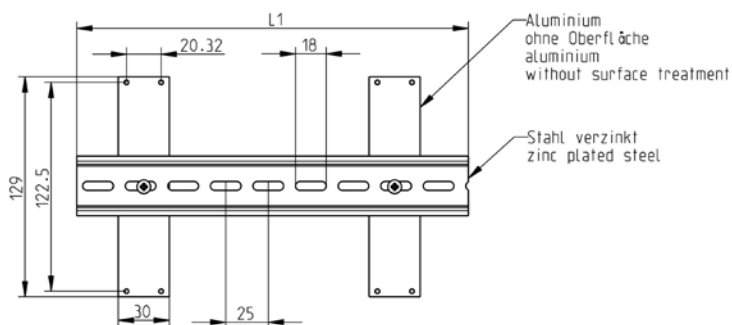

Fixing for HeiPac top-hat rail version 2



NEW

Fixing bracket to mount a top-hat rail on the subrack side panel

Material

Fixing bracket: steel plate, zinc-plated


Supply includes

2 fixing brackets
Assembly parts

| Packs of | Order No. |
|----------|-----------------|
| 1 set | 3634.770 |

+ Also required

Top-hat rail, packs of 1, see page 91

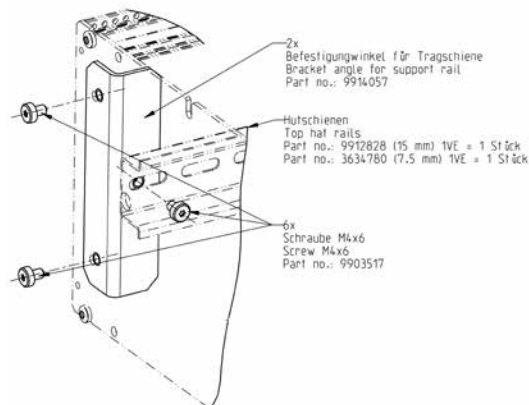

Top-hat rail



NEW

Material

Steel

Surface finish

Zinc-plated

| For Width | Dimensions mm | Packs of | Order No. |
|-----------|----------------|----------|-----------------|
| 84 HP | 35 x 7.5 x 425 | 1 | 3634.780 |
| 84 HP | 35 x 15 x 425 | 1 | 9912.828 |

Additional accessories see page

- Guide rails** → 154
- Assembly parts** → 202

SUBRACKS APPLICATION EXAMPLE

Industrial Control


Customised chassis solution for grinder control device

Industrial environments are typically characterised by harsh ambient conditions. This was why one of HEITEC's customers in the automation field needed a customised system platform to accommodate the control mechanism for the central processing unit of a grinder. Right at the outset, the customer had opted for a solution in the 19-inch range, since 19"-specific units had to be built in to the chassis.

For its solution, HEITEC designed a low-cost sheet metal casing that was powder-coated to provide protection against harsh ambient conditions and humidity. In addition, to guarantee a particularly high level of protection (IP54) against dust and humidity, PU foam seals were used for the front and rear plates. These provide a secure seal even under very harsh ambient conditions. The optimised design meant that other adaptations to the chassis, such as openings in the cover plate for wiring ducts, were also achievable at a modest cost. As a result, the chassis developed by HEITEC for its customer was ideally suited to the customer's requirements, combining maximum space availability with the most precise wire routing for the customer's application, and ensuring very high IP protection.

Inside the casing, the familiar HeiPac Vario rack components were used to meet the customer's expectations. The HeiPac Vario series is the most variable 19-inch rack family offered by HEITEC: its many size variations and accessories make it ideally suited for even the most complex applications.

To ensure very short delivery times, this project drew on systematic warehousing offered by HEITEC, which offers the customer great flexibility combined with guaranteed delivery capacity. When blanket orders are placed, this enables the logistics and customer call-off orders to be perfectly coordinated.

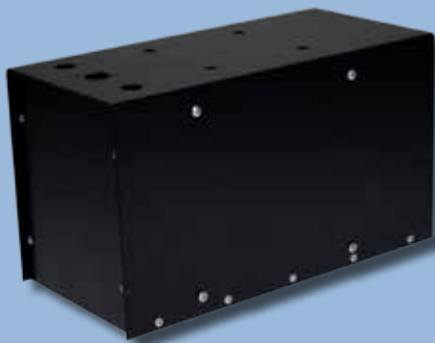

Technical Summary

- Customer-specific system platform
- Customised rack with internal structure consisting of standard HeiPac Vario components
- L x W x H: 296 mm x 30HP x 4U
- LP card brackets = 160 x 2.00 mm
- Protection class IP54

Customer Benefits

- Customised rack for a customer-specific system
- Powder coating and PU foam seals on front and back plates provide very high protection against harsh ambient conditions
- Fully prefabricated system platform for PCBs
- Cost-optimised design
- Short delivery times despite customer-specific manufacture

Transportation


Customised chassis solution for railway electrification control device

Applications for railway electrification are subject to stringent conditions. To deal with these, one of HEITEC's customers needed a customised system platform to accommodate the control mechanism for the central processing unit of a railway application.

For its solution, HEITEC designed a low-cost sheet metal casing that was painted to provide protection against harsh ambient conditions and humidity, and fitted with a thermoplastic front plate. The optimised design meant that other adaptations to the casing, such as openings in the cover plate for wiring connectors, were also achievable at a modest cost. As a result, the casing developed by HEITEC for its customer was ideally suited to the customer's requirements, combining maximum space availability with the most precise wire routing for the customer's application, and thus offering very good protection against harsh ambient conditions such as humidity, dust, high temperatures and vibrations. This was vital for the project, since the system was intended for use in the Australian desert and would have to cope with extreme changes in ambient conditions.

Inside the casing, the familiar HeiPac Vario rack components were used. The HeiPac Vario series is the most variable 19-inch rack family offered by HEITEC: its many size variations and accessories make it ideally suited for even the most complex applications.

Implementing the project depended on a number of specific criteria. Swift handling was essential – it took just a few weeks from the initial sketch to building a prototype and through to the test stage. It also had to offer very good value for money, and the optimised design made that possible.

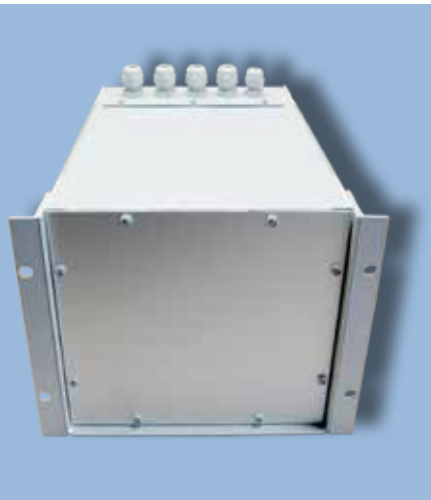

Technical Summary

- Customer-specific system platform
- Customised painted casing with internal structure consisting of HeiPac Vario components for a 7-slot backplane
- L x W x H: 325 mm x 42HP x 4U
- LP card brackets = 160 x 2.00 mm for seven single eurocards
- Macrolon front plate
- Protection class IP54
- 5 wiring connectors

Customer Benefits

- Customised rack for a customer-specific system
- Very high protection against harsh ambient conditions (IP54)
- Fully prefabricated system platform for PCBs
- Stable construction for rail-based vehicles ensures high resistance to shock and vibrations
- Good tolerance for high temperatures makes it ideal for use in desert transportation
- Very good protection against dust and moisture
- Cost-optimised design
- High service friendliness: rapid access and replacement

HEITEC Instrument Cases And System Enclosures

High Functionality And Modern Design


INSTRUMENT CASES AND SYSTEM ENCLOSURES



The HeiCase instrument case impresses with its modern design and high functionality. Particular features include the numerous colour variants and the all-metal enclosure construction. The HeiPac Vario-Module system enclosure (instrument case or rack-mount enclosure) is fully compatible with the latest HeiPac subrack range, making it ideal for individual configuration and assembly as a microcomputer system.

At just 1 U, the HeiBox system enclosure offers a high packaging density in the smallest space.

HeiBox ALU

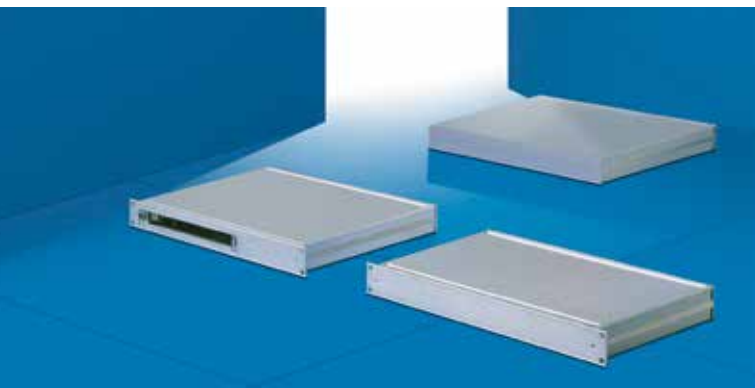


High-quality 1 U 19" system enclosure

- Optionally for use as an instrument case or rack-mount enclosure
- For horizontal installation of standardised 6 U boards
- For individual expansion
- High-quality design
- Extremely easy to assemble
- EMC upgradeable

→ Page 96

HeiBox ECO

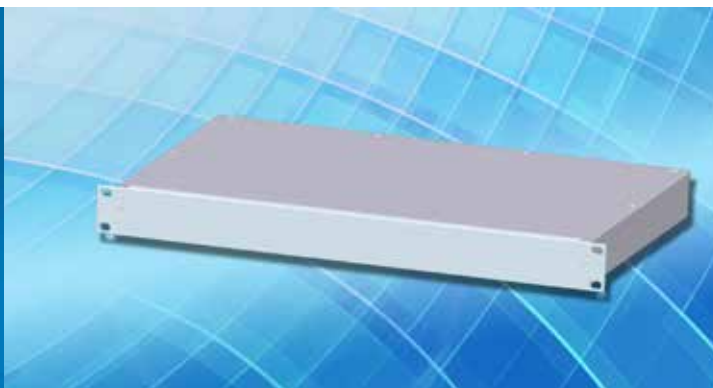

Well-priced 1 U 19" system enclosure

- Optionally for use as an instrument case or rack-mount enclosure
- For individual expansion
- EMC upgradeable

→ Page 98

HeiPac Vario-Module



Universal 19" system enclosure

- Optionally for use as an instrument case or rack-mount enclosure
- Varied selection of sizes
- Flexibel design options
- Wide range of accessories
- EMC upgradeable

→ Page 100

HeiCase



Universal instrument case

- Instrument case for the installation of 19"- slide-in assemblies and- elements
- For individual expansion
- Outstanding stability
- Varied selection of sizes
- Flexibel design options
- Wide range of accessories
- Modern design

→ Page 112

INSTRUMENT CASES AND SYSTEM ENCLOSURES

HeiBox ALU



Innovative system enclosure for standard applications

Applications

The HeiBox ALU is optionally for use as an instrument case or rack-mount enclosure. Accommodates Eurocards/ Double Eurocards (horizontal), bridges, hubs, routers or modems.

Technical specifications

- 19" system enclosure, complies with IEC 60 297-3
- Optionally for use as an instrument case or rack-mount enclosure
- Height: 1 U
- Installation width: 84 HP
- Optionally with mounting kit for 1 Double Eurocard
- Mounting plate (accessory) for individual population
- Extruded aluminium section
- Protection category IP 40

Benefits at a glance


- Minimum space requirement
- Easy and fast mounting
- High-quality design
- EMC upgradeable
- Individual assembly according to customer needs




Installation of standardised 6 U boards with mounting kit



Solid, high-quality design of extruded aluminium section

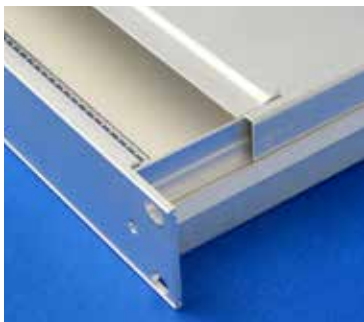


High EMC protection with additional EMC kit

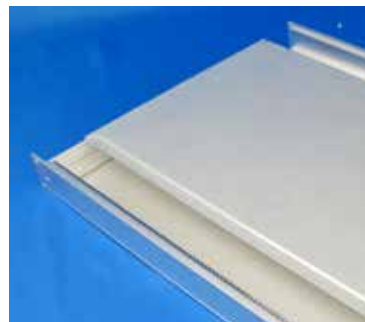


Easy to assemble with just 4 screws

HeiBox system enclosure 1 U

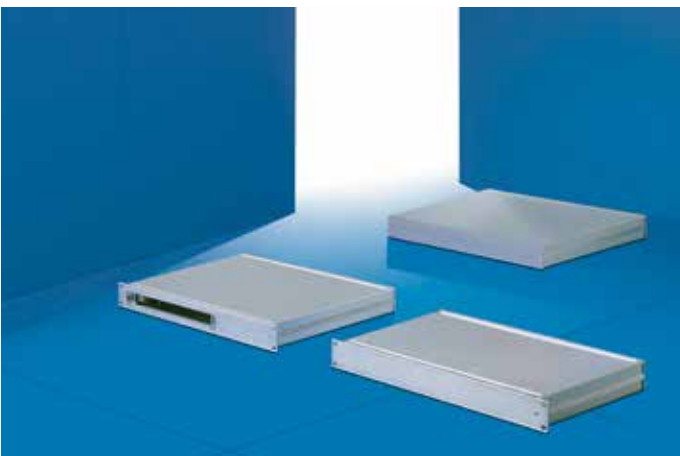

B = Width
T = Depth
HE = U

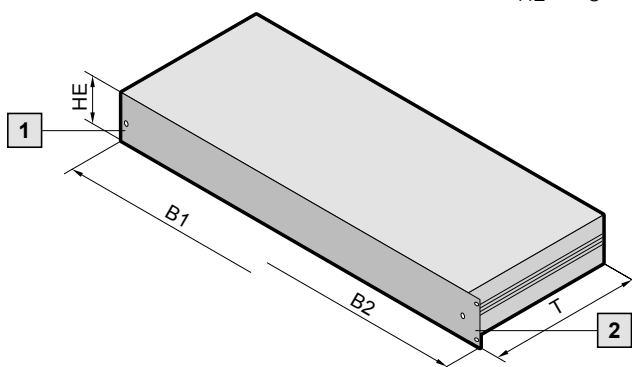

Technical specifications

System enclosures 1 U, 150, 200, 250, 300, 350 mm deep. Easy to assemble with just 4 screws. Optionally for use as an instrument case or 19" rack-mount enclosure. Front panel to hold an overlay to conceal the screws. Maximum interior space. Optional EMC upgrades with additional EMC gaskets. Option of installing electronic boards such as 1 VME or CPCI board horizontally.

Design

System enclosure 1 U, to IEC 60 297-3. Optionally available for 19" rack-mounting in the enclosure or as an instrument case version.

- 1** Equipped as an instrument case
- 2** Equipped as a rack-mount unit

Material/surface finish


Side panels: Extruded aluminium section, untreated
 Base/cover trays: Aluminium, clear-chromated
 Front/rear panel: Extruded aluminium section, clear-chromated
 Mounting plate : Aluminium

| U | 1 | 1 | 1 | 1 | 1 | - | - |
|--|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Width (B1) mm | 447 | 447 | 447 | 447 | 447 | - | - |
| Width (B2) mm | 482.6 (19") | 482.6 (19") | 482.6 (19") | 482.6 (19") | 482.6 (19") | 482.6 (19") | 482.6 (19") |
| Depth (T) mm | 150 | 200 | 250 | 300 | 350 | 250 | 350 |
| Model No. instrument case | 3687.819 | 3687.820 | 3687.821 | 3687.822 | 3687.823 | - | - |
| Model No. rack case | 3687.814 | 3687.815 | 3687.816 | 3687.817 | 3687.818 | - | - |
| Model No. rack-mount including mounting kit for double Euroboards | - | - | - | - | - | 3684.072 | 3684.073 |
| Supply includes | | | | | | | |
| Side panel | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Front panel | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Rear panel | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Base/cover tray | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Mounting kit | - | - | - | - | - | 1 | 1 |
| Accessories | | | | | | | |
| EMC set | 9919.999 | 9919.999 | 9919.999 | 9919.999 | 9919.999 | 9919.999 | 9919.999 |
| Mounting plate | 3684.074 | 3684.075 | 3684.076 | 3684.077 | 3684.078 | - | - |

Other customised solutions regarding dimensions and coloring are available upon request. Please get in contact with one of our sales representatives for further assistance: [Tel. +49 9126 - 29 34 0](tel:+49912629340)

INSTRUMENT CASES AND SYSTEM ENCLOSURES

HeiBox ECO

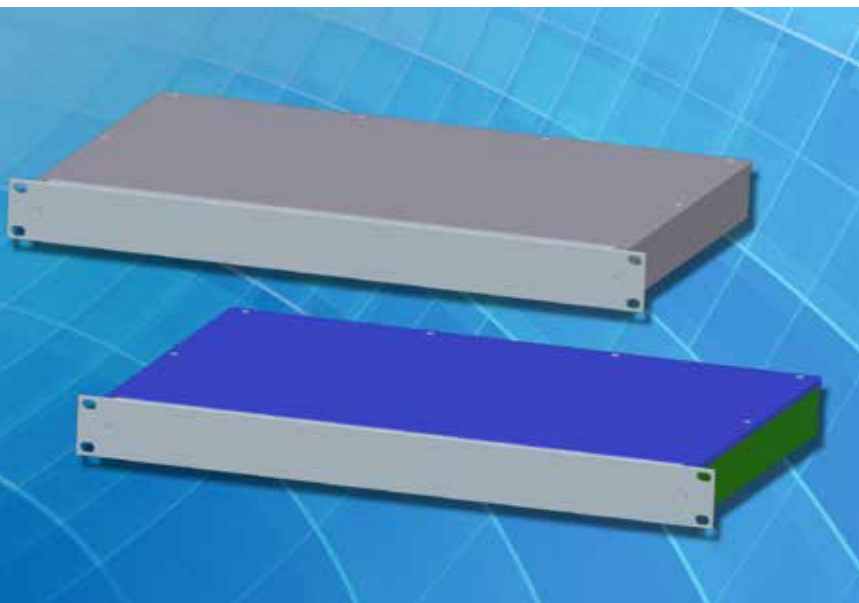

Well-priced system enclosure for standard applications

Applications

The HeiBox ECO is for use as a rack-mount enclosure. Accommodates Eurocards/Double Eurocards (horizontal), bridges, hubs, routers or modems.

Technical specifications

- 19" system enclosure, complies with IEC 60 297-3
- For use as a rack-mount enclosure
- Height: 1 U
- Installation width: 84 HP
- Enclosure made of sheet steel, front panel and rear panel made of extruded aluminium section
- Optionally available as an instrument case or rack-mount enclosure
- Optional: highly effective EMC protection


Benefits at a glance

- Minimum space requirement
- Well-priced and solid
- Easy and fast mounting
- EMC upgradeable
- Individual assembly according to customer needs

NEW



Available as instrument case with individual spray finish upon request

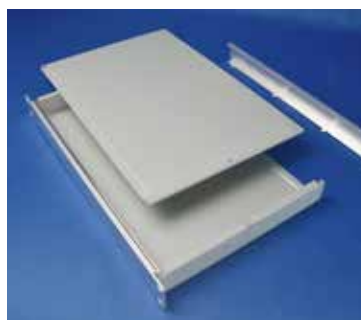

Easy to assemble with just 4 components





High EMC protection with additional EMC kit



Aluminium rear panel easy to process

HeiBox ECO system enclosure 1 U

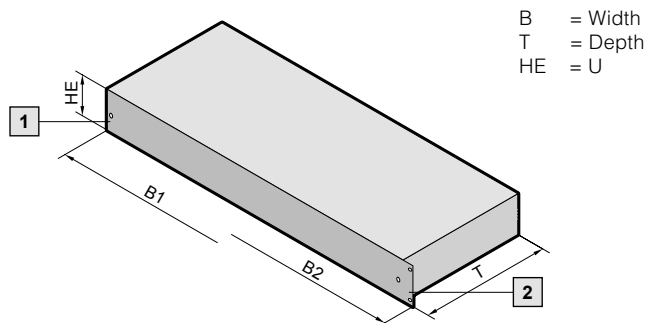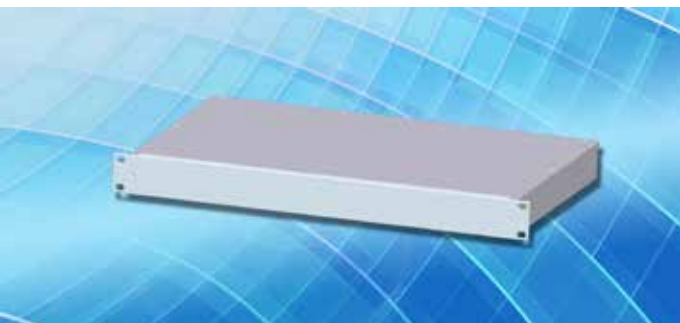

Technical specifications

System enclosures 1 HE, 150, 200, 250, 300, 350 mm deep. Easy to assemble with just 4 components. Optionally for use as an instrument case or 19" rack-mount enclosure. Maximum interior space. Optional EMC upgrades with additional EMC gaskets.

Design

System enclosure 1 U, to IEC 60 297-3. Optionally available for 19" rack-mounting in the enclosure or as an instrument case version on customer request.

- 1** Equipped as an instrument case
- 2** Equipped as a rack-mount unit

Material/surface finish

Base tray: sheet steel
 Front/rear panel: Extruded aluminium section, clear-chromated
 Cover: sheet steel

Note

Upon request, the HeiBox ECO is also available as 2 U version as well as instrument case with individual spray finish.

NEW

| U | 1 | 1 | 1 | 1 | 1 |
|----------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Width (B1) mm | 447 | 447 | 447 | 447 | 447 |
| Width (B2) mm | 482.6 (19") | 482.6 (19") | 482.6 (19") | 482.6 (19") | 482.6 (19") |
| Depth (T) mm | 150 | 200 | 250 | 300 | 350 |
| Model No. rack-mount unit | 9919.795 | 9919.796 | 9919.797 | 9919.798 | 9919.799 |
| Supply includes | | | | | |
| Cover | 1 | 1 | 1 | 1 | 1 |
| Front panel | 1 | 1 | 1 | 1 | 1 |
| Rear panel | 1 | 1 | 1 | 1 | 1 |
| Base tray | 1 | 1 | 1 | 1 | 1 |
| Accessories | | | | | |
| EMC set | 9919.800 | 9919.800 | 9919.800 | 9919.800 | 9919.800 |

Other customised solutions regarding dimensions and coloring are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

INSTRUMENT CASES AND SYSTEM ENCLOSURES

HeiPac Vario-Module



Modern system enclosure for mobile and stationary applications

Applications

Optionally for use as an instrument case or rack-mount enclosure. Accommodates PCBs or plug-in units. For mobile and stationary applications.

Technical specifications

- 19" system enclosure, complies with IEC 60 297-3
- Optionally for use as an instrument case or rack-mount enclosure
- Basic case optionally with bottom or top cover
- Height: 2 - 7 U
- Installation width: 42, 63, 84 HP
- Depth: 250 - 430 mm
- Variable depth interior installation
- Extruded aluminium section
- Protection category IP 40

Benefits at a glance

- Easy modification from instrument case to rack-mount system
- Broad range of accessories
- Neutral design
- Basic case with variable expansions
- Optional EMC version



Broad range of accessories



Interior fittings from the HeiPac Vario range



Flange for 19" installation




Front corner trims for assembly as instrument case

HeiPac Vario-Module 2 U



B = Width
T = Depth
HE = U
TE = HP

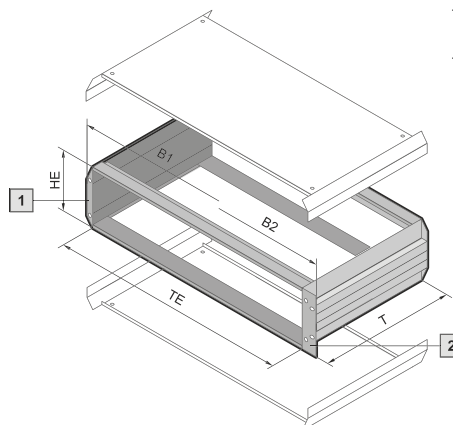

Technical specifications

Optionally for use as an instrument case or rack-mount enclosure. External dimensions to IEC 60 297-3 for installation in enclosures, 482,6 mm (19"). Installation dimensions for plug-in units according to IEC 60 297-3-101.

Protection category

IP 40 for non-vented version.

Supply includes

2 side panels
4 horizontal rails
4 threaded inserts
2 corner trims
Assembly parts

- 1** Equipped as an instrument case
- 2** Equipped as a rack-mount enclosure

Material/surface finish


Side panels: Extruded aluminium section, spray-finished in RAL 7035
Horizontal rail: Extruded aluminium section, clear-chromated
Side trim panels: Extruded aluminium section, spray-finished in RAL 7035

Note

Corner trims, mounting flanges and top/bottom covers have to be ordered separately.

Horizontal rails for additional installations have to be ordered separately, see page 130

Exemplary horizontal rail configuration




2 U

| | Packs of | 2 U | | | | | | Page |
|---|--------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------|
| Installation width (HP) | | 42 | 42 | 63 | 63 | 84 | 84 | |
| Width (B1) mm | | 235.6 | 235.6 | 342.3 | 342.3 | 449.0 | 449.0 | |
| Width (B2) mm | | 251.6 | 251.6 | 358.3 | 358.3 | 465.1 | 465.1 | |
| Depth (T) mm | | 250.4 | 310.4 | 250.4 | 310.4 | 250.4 | 310.4 | |
| Mod.No. VM basic case | 1 | 3982.000 | 3982.020 | 3982.290 | 3982.300 | 3982.010 | 3982.030 | |
| Also required | | | | | | | | |
| Top covers | | | | | | | | |
| - with vent holes | 1 | 3982.941 | 3982.951 | 3982.942 | 3982.952 | 3982.940 | 3982.950 | 107 |
| - without vent holes | 1 | 3982.901 | 3982.911 | 3982.902 | 3982.912 | 3982.900 | 3982.910 | 107 |
| Bottom covers | | | | | | | | |
| - with vent holes | 1 | 3982.741 | 3982.751 | 3982.742 | 3982.752 | 3982.740 | 3982.750 | 107 |
| - without vent holes | 1 | 3982.701 | 3982.711 | 3982.702 | 3982.712 | 3982.700 | 3982.710 | 107 |
| Front corner trims for assembly as instrument case | 2 | 3981.300 | 3981.300 | 3981.300 | 3981.300 | 3981.300 | 3981.300 | 109 |
| Flanges for configuration as rack-mount system - without handle holes | 2 | 3981.200 | 3981.200 | 3981.200 | 3981.200 | 3981.200 | 3981.200 | 108 |
| Accessories | | | | | | | | |
| Front/rear panels | see page 110 - 111 | | | | | | | |
| Rear adjustable feet | 4 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 109 |

Other customised solutions regarding dimensions and colouring are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

HeiPac Vario-Module

HeiPac Vario-Module 2 U, EMC

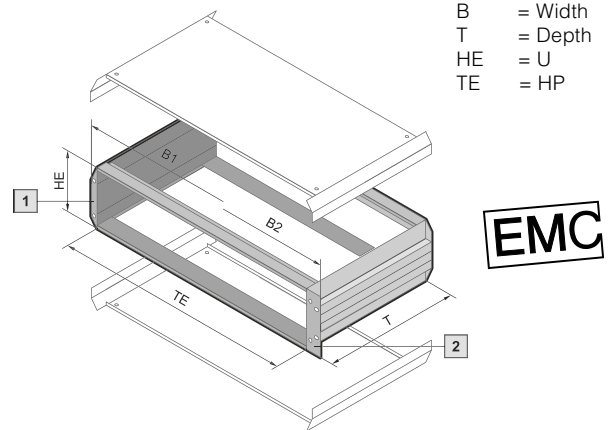

Technical specifications

Optionally for use as an instrument case or rack-mount enclosure. External dimensions according to IEC 60 297-3 for installation in enclosures, 482.6 mm (19"). Installation dimensions for plug-in units according to IEC 60 297-3-101.

Protection category

IP 40 for non-vented version.

Supply includes

- 2 side panels
- 4 horizontal rails
- 4 threaded inserts
- 2 corner trims
- Assembly parts

- 1** Equipped as an instrument case
- 2** Equipped as a rack-mount enclosure

Material/surface finish


- Side panels: Extruded aluminium section, spray-finished in RAL 7035
- Horizontal rail: Extruded aluminium section, clear-chromated
- Corner trims: Extruded aluminium section, spray-finished in RAL 7035
- Contact points: conductive

Note

Corner trims, mounting flanges and top/bottom covers have to be ordered separately.

Horizontal rails for additional installations have to be ordered separately, see pages 130

Exemplary horizontal rail configuration




2 U

| | Packs of | 2 U | | | | | | Page |
|---|--------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------|
| Installation width (HP) | | 42 | 42 | 63 | 63 | 84 | 84 | |
| Width (B1) mm | | 235.6 | 235.6 | 342.3 | 342.3 | 449.0 | 449.0 | |
| Width (B2) mm | | 251.6 | 251.6 | 358.3 | 358.3 | 465.1 | 465.1 | |
| Depth (T) mm | | 250.4 | 310.4 | 250.4 | 310.4 | 250.4 | 310.4 | |
| Mod.No. VM basic case EMC | 1 | 3983.000 | 3983.020 | 3983.290 | 3983.300 | 3983.010 | 3983.030 | |
| Also required | | | | | | | | |
| Top cover | | | | | | | | |
| - with vent holes | 1 | 3981.941 | 3981.951 | 3981.942 | 3981.952 | 3981.940 | 3981.950 | 107 |
| - without vent holes | 1 | 3981.901 | 3981.911 | 3981.902 | 3981.912 | 3981.900 | 3981.910 | 107 |
| Bottom covers | | | | | | | | |
| - with vent holes | 1 | 3981.741 | 3981.751 | 3981.742 | 3981.752 | 3981.740 | 3981.750 | 107 |
| - without vent holes | 1 | 3981.701 | 3981.711 | 3981.702 | 3981.712 | 3981.700 | 3981.710 | 107 |
| Corner trims for assembly as instrument case | 2 | 3981.300 | 3981.300 | 3981.300 | 3981.300 | 3981.300 | 3981.300 | 109 |
| Flanges for configuration as rack-mount enclosure | | | | | | | | |
| - without handle holes | 2 | 3981.200 | 3981.200 | 3981.200 | 3981.200 | 3981.200 | 3981.200 | 108 |
| EMC installation | | | | | | | | |
| EMC gaskets, horizontal - for upper/lower horizontal rail | 1 | 3684.808 | 3684.808 | 3684.808 | 3684.808 | 3684.808 | 3684.808 | 145 |
| - between covers and horizontal rails | 10 | 3684.245 | 3684.245 | 3684.245 | 3684.245 | 3684.245 | 3684.245 | 147 |
| EMC gaskets, vertical | 1 | 3686.974 | 3686.974 | 3686.974 | 3686.974 | 3686.974 | 3686.974 | 111 |
| Front/rear panels EMC | see page 110 - 111 | | | | | | | |
| Accessories | | | | | | | | |
| Rear adjustable feet | 4 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 109 |

Other customised solutions regarding dimensions and colouring are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

HeiPac Vario-Module 3 U

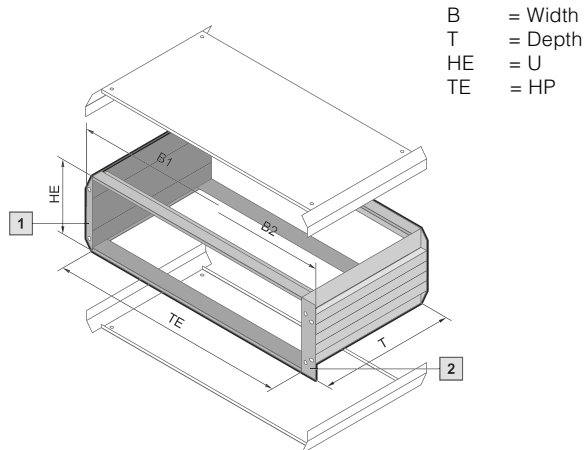

B = Width
T = Depth
HE = U
TE = HP

Technical specifications

Optionally for use as an instrument case or rack-mount enclosure. External dimensions according to IEC 60 297-3 for installation in enclosures, 482.6 mm (19"). Installation dimensions for plug-in units according to IEC 60 297-3-101.

Protection category

IP 40 for non-vented version.

Supply includes

- 2 side panels
- 4 horizontal rails
- 4 threaded inserts
- 2 corner trims
- Assembly parts

- 1** Equipped as an instrument case
- 2** Equipped as a rack-mount enclosure

Material/Surface finish


- Side panels: Extruded aluminium section, spray-finished in RAL 7035
- Horizontal rail: Extruded aluminium section, clear-chromated
- Corner trims: Extruded aluminium section, spray-finished in RAL 7035

Note

Corner trims, mounting flanges and top/bottom covers have to be ordered separately.

Horizontal rails for additional installations have to be ordered separately, see pages 130

Exemplary horizontal rail configuration



3 U


| | Packs of | 3 U | | | | | | | Page |
|--|--------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------|
| Installation width (HP) | | 42 | 42 | 63 | 63 | 84 | 84 | 84 | |
| Width (B1) mm | | 235.6 | 235.6 | 342.3 | 342.3 | 449.0 | 449.0 | 449.0 | |
| Width (B2) mm | | 251.6 | 251.6 | 358.3 | 358.3 | 465.1 | 465.1 | 465.1 | |
| Depth (T) mm | | 250.4 | 310.4 | 250.4 | 310.4 | 250.4 | 310.4 | 370.4 | |
| Mod.No. VM basic case | 1 | 3982.040 | 3982.070 | 3982.050 | 3982.080 | 3982.060 | 3982.090 | 3982.100 | |
| Also required | | | | | | | | | |
| Top covers | | | | | | | | | |
| - with vent holes | 1 | 3982.941 | 3982.951 | 3982.942 | 3982.952 | 3982.940 | 3982.950 | 3982.960 | 107 |
| - without vent holes | 1 | 3982.901 | 3982.911 | 3982.902 | 3982.912 | 3982.900 | 3982.910 | 3982.920 | 107 |
| Bottom covers | | | | | | | | | |
| - with vent holes | 1 | 3982.741 | 3982.751 | 3982.742 | 3982.752 | 3982.740 | 3982.750 | 3982.760 | 107 |
| - without vent holes | 1 | 3982.701 | 3982.711 | 3982.702 | 3982.712 | 3982.700 | 3982.710 | 3982.720 | 107 |
| Front corner trims for assembly as instrument case | 2 | 3981.310 | 3981.310 | 3981.310 | 3981.310 | 3981.310 | 3981.310 | 3981.310 | 109 |
| Flanges for configuration as rack-mount system | | | | | | | | | |
| - without handle holes | 2 | 3981.210 | 3981.210 | 3981.210 | 3981.210 | 3981.210 | 3981.210 | 3981.210 | 108 |
| - with handle holes | 2 | 3981.260 | 3981.260 | 3981.260 | 3981.260 | 3981.260 | 3981.260 | 3981.260 | |
| Accessories | | | | | | | | | |
| Front/rear panels | see page 110 - 111 | | | | | | | | |
| Carrying handles | 2 | 3981.350 | 3981.360 | 3981.350 | 3981.360 | 3981.350 | 3981.360 | 3981.370 | 109 |
| Front handles ¹⁾ | 2 | 3636.010 | 3636.010 | 3636.010 | 3636.010 | 3636.010 | 3636.010 | 3636.010 | 57 |
| Rear adjustable feet | 4 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 109 |

¹⁾ Only in conjunction with mounting flanges with handle holes.

Other customised solutions regarding dimensions and colouring are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

HeiPac Vario-Module

HeiPac Vario-Module 3 U, EMC

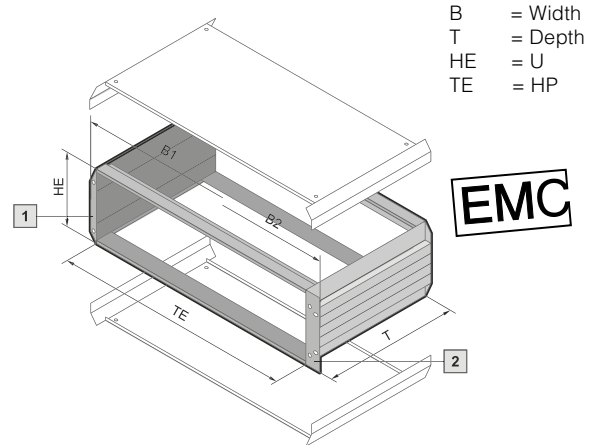

Technical specifications

Optionally for use as an instrument case or rack-mount enclosure. External dimensions according to IEC 60 297-3 for installation in enclosures, 482.6 mm (19"). Installation dimensions for plug-in units according to IEC 60 297-3-101.

Protection category

IP 40 for non-vented version.

Supply includes

- 2 side panels
- 4 horizontal rails
- 4 threaded inserts
- 2 corner trims
- Assembly parts

- 1** Equipped as an instrument case
- 2** Equipped as a rack-mount enclosure

Material/surface finish


- Side panels: Extruded aluminium section, spray-finished in RAL 7035
- Horizontal rail: Extruded aluminium section, clear-chromated
- Corner trims: Extruded aluminium section, spray-finished in RAL 7035
- Contact points: conductive

Note

Corner trims, mounting flanges and top/bottom covers have to be ordered separately.

Horizontal rails for additional installations have to be ordered separately, see pages 130

Exemplary horizontal rail configuration




3 U

| | Packs of | 3 U | | | | | | | Page |
|--|--------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------|
| | | 42 | 42 | 63 | 63 | 84 | 84 | 84 | |
| Installation width (HP) | | | | | | | | | |
| Width (B1) mm | | 235.6 | 235.6 | 342.3 | 342.3 | 449.0 | 449.0 | 449.0 | |
| Width (B2) mm | | 251.6 | 251.6 | 358.3 | 358.3 | 465.1 | 465.1 | 465.1 | |
| Depth (T) mm | | 250.4 | 310.4 | 250.4 | 310.4 | 250.4 | 310.4 | 370.4 | |
| Mod.No. VM basic case EMC | 1 | 3983.040 | 3983.070 | 3983.050 | 3983.080 | 3983.060 | 3983.090 | 3983.100 | |
| Also required | | | | | | | | | |
| Top covers | | | | | | | | | |
| - with vent holes | 1 | 3981.941 | 3981.951 | 3981.942 | 3981.952 | 3981.940 | 3981.950 | 3981.960 | 107 |
| - without vent holes | 1 | 3981.901 | 3981.911 | 3981.902 | 3981.912 | 3981.900 | 3981.910 | 3981.920 | 107 |
| Bottom covers | | | | | | | | | |
| - with vent holes | 1 | 3981.741 | 3981.751 | 3981.742 | 3981.752 | 3981.740 | 3981.750 | 3981.760 | 107 |
| - without vent holes | 1 | 3981.701 | 3981.711 | 3981.702 | 3981.712 | 3981.700 | 3981.710 | 3981.720 | 107 |
| Front corner trims for assembly as instrument case | 2 | 3981.310 | 3981.310 | 3981.310 | 3981.310 | 3981.310 | 3981.310 | 3981.310 | 109 |
| Flanges for configuration as rack-mount system | | | | | | | | | |
| - without handle holes | 2 | 3981.210 | 3981.210 | 3981.210 | 3981.210 | 3981.210 | 3981.210 | 3981.210 | 108 |
| - with handle holes | 2 | 3981.260 | 3981.260 | 3981.260 | 3981.260 | 3981.260 | 3981.260 | 3981.260 | |
| EMC installation | | | | | | | | | |
| EMC gaskets, horizontal | | | | | | | | | |
| - for upper/lower horizontal rail | 1 | 3684.808 | 3684.808 | 3684.808 | 3684.808 | 3684.808 | 3684.808 | 3684.808 | 145 |
| - between covers and horizontal rails | 10 | 3684.245 | 3684.245 | 3684.245 | 3684.245 | 3684.245 | 3684.245 | 3684.245 | 147 |
| EMC gaskets, vertical | 1 | 3686.975 | 3686.975 | 3686.975 | 3686.975 | 3686.975 | 3686.975 | 3686.975 | 111 |
| Front/rear panels EMC | see page 110 - 111 | | | | | | | | |
| Accessories | | | | | | | | | |
| Carrying handles | 2 | 3981.350 | 3981.360 | 3981.350 | 3981.360 | 3981.350 | 3981.360 | 3981.370 | 109 |
| Front handles ¹⁾ | 2 | 3636.010 | 3636.010 | 3636.010 | 3636.010 | 3636.010 | 3636.010 | 3636.010 | 57 |
| Rear adjustable feet | 4 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 109 |

¹⁾ Only in conjunction with mounting flanges with handle holes.

Other customised solutions regarding dimensions and colouring are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

HeiPac Vario-Module 4 U, 6 U, 7 U

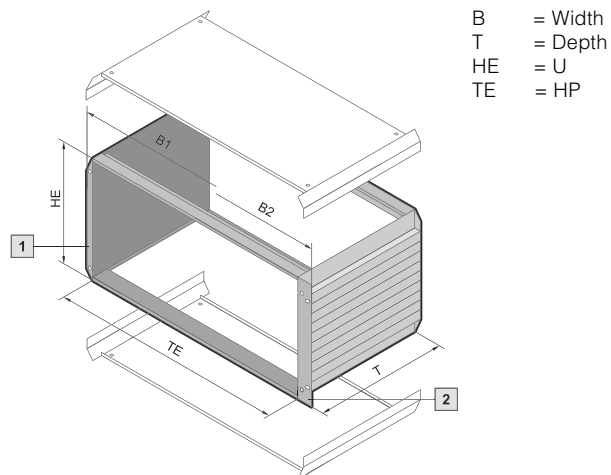

B = Width
T = Depth
HE = U
TE = HP

Technical specifications

Optionally for use as an instrument case or rack-mount enclosure. External dimensions according to IEC 60 297-3 for installation in enclosures, 482.6 mm (19"). Installation dimensions for plug-in units according to IEC 60 297-3-101.

Protection category

IP 40 for non-vented version.

Supply includes

- 2 side panels
- 4 horizontal rails
- 4 threaded inserts
- 2 corner trims
- Assembly parts
- 2 side trims centre

- 1** Equipped as an instrument case
- 2** Equipped as a rack-mount enclosure


Material/Surface finish

- Side panels: Extruded aluminium section, spray-finished in RAL 7035
- Horizontal rail: Extruded aluminium section, clear-chromated
- Corner trims: Extruded aluminium section, spray-finished in RAL 7035
- Side trims centre: Extruded aluminium section, spray-finished in RAL 7035

Note

Corner trims, mounting flanges and top/bottom covers have to be ordered separately.

Exemplary horizontal rail configuration

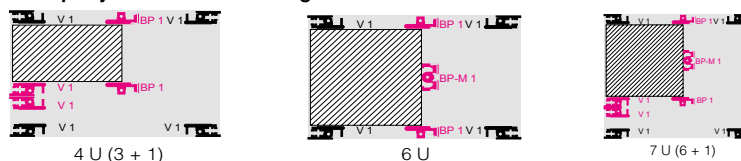

Horizontal rails for additional installations have to be ordered separately, see pages 130

| | Packs of | 4 U (3 + 1) | | | 6 U | | | 7 U | | Page |
|--|--------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------|
| Installation width (HP) | | 84 | 84 | 84 | 84 | 84 | 84 | 84 | 84 | |
| Width (B1) mm | | 449.0 | 449.0 | 449.0 | 449.0 | 449.0 | 449.0 | 449.0 | 449.0 | |
| Width (B2) mm | | 465.1 | 465.1 | 465.1 | 465.1 | 465.1 | 465.1 | 465.1 | 465.1 | |
| Depth (T) mm | | 250.4 | 310.4 | 370.4 | 310.4 | 370.4 | 430.4 | 310.4 | 430.4 | |
| Mod.No. VM basic case | 1 | 3982.110 | 3982.120 | 3982.130 | 3982.140 | 3982.150 | 3982.160 | 3982.170 | 3982.190 | |
| Also required | | | | | | | | | | |
| Top covers | | | | | | | | | | |
| - with vent holes | 1 | 3982.940 | 3982.950 | 3982.960 | 3982.950 | 3982.960 | 3982.970 | 3982.950 | 3982.970 | 107 |
| - without vent holes | 1 | 3982.900 | 3982.910 | 3982.920 | 3982.910 | 3982.920 | 3982.930 | 3982.910 | 3982.930 | 107 |
| Bottom covers | | | | | | | | | | |
| - with vent holes | 1 | 3982.740 | 3982.750 | 3982.760 | 3982.750 | 3982.760 | 3982.770 | 3982.750 | 3982.770 | 107 |
| - without vent holes | 1 | 3982.700 | 3982.710 | 3982.720 | 3982.710 | 3982.720 | 3982.730 | 3982.710 | 3982.730 | 107 |
| Front corner trims for assembly as instrument case | 2 | 3981.320 | 3981.320 | 3981.320 | 3981.330 | 3981.330 | 3981.330 | 3981.340 | 3981.340 | 109 |
| Flanges for configuration as rack-mount system | | | | | | | | | | |
| - without handle holes | 2 | 3981.220 | 3981.220 | 3981.220 | 3981.230 | 3981.230 | 3981.230 | 3981.240 | 3981.240 | 108 |
| - with handle holes | 2 | 3981.270 | 3981.270 | 3981.270 | 3981.280 | 3981.280 | 3981.280 | 3981.290 | 3981.290 | 108 |
| Accessories | | | | | | | | | | |
| Front/rear panels | see page 110 - 111 | | | | | | | | | |
| Carrying handles | 2 | 3981.350 | 3981.360 | 3981.370 | 3981.360 | 3981.370 | 3981.380 | 3981.360 | 3981.380 | 109 |
| Front handles ¹⁾ | 2 | 3636.010 | 3636.010 | 3636.010 | 3666.010 | 3666.010 | 3666.010 | 3666.010 | 3666.010 | 57 |
| Rear adjustable feet | 4 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 109 |


¹⁾ Only in conjunction with mounting flanges with handle holes.

Other customised solutions regarding dimensions and colouring are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

INSTRUMENT CASES AND SYSTEM ENCLOSURES

HeiPac Vario-Module

HeiPac Vario-Module 4 U, 6 U, 7 U, EMC

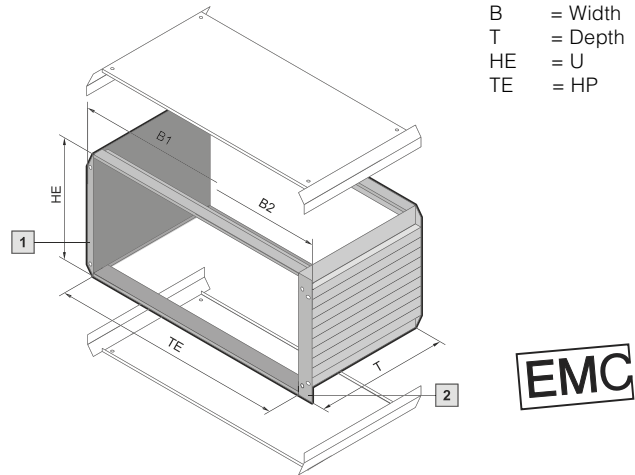

Technical specifications

Optionally for use as an instrument case or rack-mount enclosure. External dimensions according to IEC 60 297-3 for installation in enclosures, 482.6 mm (19"). Installation dimensions for plug-in units according to IEC 60 297-3-101.

Protection category

IP 40 for non-vented version.

Supply includes

2 side panels
4 horizontal rails
4 threaded inserts
2 corner trims
2 side trims centre
Assembly parts

1 Equipped as an instrument case

2 Equipped as a rack-mount enclosure

Material/surface finish

Side panels: Extruded aluminium section, spray-finished in RAL 7035
Horizontal rail: Extruded aluminium section, clear-chromated
Corner trims: Extruded aluminium section, spray-finished in RAL 7035
Side trims centre: Extruded aluminium section, spray-finished in RAL 7035
Contact points: conductive

Note

Corner trims, mounting flanges and top/bottom covers have to be ordered separately.

Horizontal rails for additional installations have to be ordered separately, see page 130

Exemplary horizontal rail configuration see page 105


| | Packs of | 4 U (3 + 1) | | | 6 U | | | 7 U | | Page |
|--|--------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------|
| Installation width (HP) | | 84 | 84 | 84 | 84 | 84 | 84 | 84 | 84 | |
| Width (B1) mm | | 449,0 | 449,0 | 449,0 | 449,0 | 449,0 | 449,0 | 449,0 | 449,0 | |
| Width (B2) mm | | 465,1 | 465,1 | 465,1 | 465,1 | 465,1 | 465,1 | 465,1 | 465,1 | |
| Depth (T) mm | | 250,4 | 310,4 | 370,4 | 310,4 | 370,4 | 430,4 | 310,4 | 430,4 | |
| Mod.No. VM basic case EMC | 1 | 3983.110 | 3983.120 | 3983.130 | 3983.140 | 3983.150 | 3983.160 | 3983.170 | 3983.190 | |
| Also required | | | | | | | | | | |
| Top covers | | | | | | | | | | |
| - with vent holes | 1 | 3981.940 | 3981.950 | 3981.960 | 3981.950 | 3981.960 | 3981.970 | 3981.950 | 3981.970 | 107 |
| - without vent holes | 1 | 3981.900 | 3981.910 | 3981.920 | 3981.910 | 3981.920 | 3981.930 | 3981.910 | 3981.930 | 107 |
| Bottom covers | | | | | | | | | | |
| - with vent holes | 1 | 3981.740 | 3981.750 | 3981.760 | 3981.750 | 3981.760 | 3981.770 | 3981.750 | 3981.770 | 107 |
| - without vent holes | 1 | 3981.700 | 3981.710 | 3981.720 | 3981.710 | 3981.720 | 3981.730 | 3981.710 | 3981.730 | 107 |
| Front corner trims for assembly as instrument case | 2 | 3981.320 | 3981.320 | 3981.320 | 3981.330 | 3981.330 | 3981.330 | 3981.340 | 3981.340 | 109 |
| Flanges for configuration as rack-mount system | | | | | | | | | | |
| - without handle holes | 2 | 3981.220 | 3981.220 | 3981.220 | 3981.230 | 3981.230 | 3981.230 | 3981.240 | 3981.240 | 108 |
| - with handle holes | 2 | 3981.270 | 3981.270 | 3981.270 | 3981.280 | 3981.280 | 3981.280 | 3981.290 | 3981.290 | 108 |
| EMC installation | | | | | | | | | | |
| EMC gaskets, horizontal | | | | | | | | | | |
| - for upper/lower horizontal rail | 1 | 3684.808 | 3684.808 | 3684.808 | 3684.808 | 3684.808 | 3684.808 | 3684.808 | 3684.808 | 145 |
| - between covers and horizontal rails | 10 | 3684.245 | 3684.245 | 3684.245 | 3684.245 | 3684.245 | 3684.245 | 3684.245 | 3684.245 | 147 |
| EMC gaskets, vertical | 1 | 3686.976 | 3686.976 | 3686.976 | 3686.977 | 3686.977 | 3686.977 | 3686.978 | 3686.978 | 111 |
| Front/rear panels EMC | see page 110 - 111 | | | | | | | | | |
| Accessories | | | | | | | | | | |
| Carrying handles | 2 | 3981.350 | 3981.360 | 3981.370 | 3981.360 | 3981.370 | 3981.380 | 3981.360 | 3981.370 | 109 |
| Front handles ¹⁾ | 2 | 3636.010 | 3636.010 | 3636.010 | 3666.010 | 3666.010 | 3666.010 | 3666.010 | 3666.010 | 57 |
| Rear adjustable feet | 4 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 3901.000 | 109 |

¹⁾ Only in conjunction with mounting flanges with handle holes.

Other customised solutions regarding dimensions and colouring are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

INSTRUMENT CASES AND SYSTEM ENCLOSURES RECOMMENDED ACCESSORIES HeiPac Vario-Module

Top covers

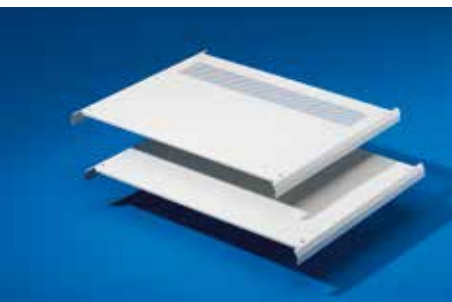

For HeiPac Vario-Module

Standard version - Material

Sheet steel
Spray-finished

Colour

RAL 7035

EMC version - Material

Sheet steel
spray-finished
Contact points: conductive

VM standard

| HP | Depth mm | Order No. | |
|----|----------|-----------------|--------------------|
| | | with vent holes | without vent holes |
| 42 | 250.4 | 3982.941 | 3982.901 |
| | 310.4 | 3982.951 | 3982.911 |
| 63 | 250.4 | 3982.942 | 3982.902 |
| | 310.4 | 3982.952 | 3982.912 |
| 84 | 250.4 | 3982.940 | 3982.900 |
| | 310.4 | 3982.950 | 3982.910 |
| | 370.4 | 3982.960 | 3982.920 |
| | 430.4 | 3982.970 | 3982.930 |

VM EMC

| HP | Depth mm | Order No. | |
|----|----------|-----------------|--------------------|
| | | with vent holes | without vent holes |
| 42 | 250.4 | 3981.941 | 3981.901 |
| | 310.4 | 3981.951 | 3981.911 |
| 63 | 250.4 | 3981.942 | 3981.902 |
| | 310.4 | 3981.952 | 3981.912 |
| 84 | 250.4 | 3981.940 | 3981.900 |
| | 310.4 | 3981.950 | 3981.910 |
| | 370.4 | 3981.960 | 3981.920 |
| | 430.4 | 3981.970 | 3981.930 |

Bottom covers



For HeiPac Vario-Module

Standard version - Material

Sheet steel
Spray-finished

Colour

RAL 7035

EMC version - Material

Sheet steel
spray-finished
Contact points: conductive

VM standard

| HP | Depth mm | Order No. | |
|----|----------|-----------------|--------------------|
| | | with vent holes | without vent holes |
| 42 | 250.4 | 3982.741 | 3982.701 |
| | 310.4 | 3982.751 | 3982.711 |
| 63 | 250.4 | 3982.742 | 3982.702 |
| | 310.4 | 3982.752 | 3982.712 |
| 84 | 250.4 | 3982.740 | 3982.700 |
| | 310.4 | 3982.750 | 3982.710 |
| | 370.4 | 3982.760 | 3982.720 |
| | 430.4 | 3982.770 | 3982.730 |

VM EMC

| HP | Depth mm | Order No. | |
|----|----------|-----------------|--------------------|
| | | with vent holes | without vent holes |
| 42 | 250.4 | 3981.741 | 3981.701 |
| | 310.4 | 3981.751 | 3981.711 |
| 63 | 250.4 | 3981.742 | 3981.702 |
| | 310.4 | 3981.752 | 3981.712 |
| 84 | 250.4 | 3981.740 | 3981.700 |
| | 310.4 | 3981.750 | 3981.710 |
| | 370.4 | 3981.760 | 3981.720 |
| | 430.4 | 3981.770 | 3981.730 |

INSTRUMENT CASES AND SYSTEM ENCLOSURES

RECOMMENDED ACCESSORIES HeiPac Vario-Module

Feet



With fold-out support stand.
Load capacity up to 20 kg

Material

Plastic

Colour

RAL 7035

| Packs of | Order No. |
|----------|-----------------|
| 2 | 3919.000 |

Mounting plate



For mounting heavy components

Material

Aluminium

Supply includes

Assembly parts

| HP | Depth mm | Packs of | Order No. |
|----|----------|----------|-----------------|
| 42 | 250 | 1 | 3982.370 |
| 42 | 310 | 1 | 9921.946 |
| 42 | 370 | 1 | 9921.947 |
| 42 | 430 | 1 | 9921.948 |
| 63 | 250 | 1 | 3982.380 |
| 63 | 310 | 1 | 9921.949 |
| 63 | 370 | 1 | 9921.950 |
| 63 | 430 | 1 | 9921.951 |
| 84 | 250 | 1 | 3982.390 |
| 84 | 310 | 1 | 9921.952 |
| 84 | 370 | 1 | 9921.953 |
| 84 | 430 | 1 | 9921.954 |

Front flanges



Required when the HeiPac Vario-Module is to be used as a rack-mount enclosure. The flanges have a channel to accommodate vertical EMC gaskets.

Material

Aluminium
Clear-chromated

| U | Packs of | Order No. | |
|---|----------|---------------------|------------------|
| | | without handle hole | with handle hole |
| 2 | 2 | 3981.200 | - |
| 3 | 2 | 3981.210 | 3981.260 |
| 4 | 2 | 3981.220 | 3981.270 |
| 6 | 2 | 3981.230 | 3981.280 |
| 7 | 2 | 3981.240 | 3981.290 |

+ Accessories

Vertical EMC gasket
see page 146
Front handles for mounting on front flanges,
see page 81

INSTRUMENT CASES AND SYSTEM ENCLOSURES

RECOMMENDED ACCESSORIES HeiPac Vario-Module

Front corner trims



Required when the HeiPac Vario-Module is to be used as a instrument case. The corner trims have a channel to accommodate vertical EMC gaskets.

Material

Aluminium
Spray-finished

Colour

RAL 7035

| U | Packs of | Order No. |
|---|----------|-----------------|
| 2 | 2 | 3981.300 |
| 3 | 2 | 3981.310 |
| 4 | 2 | 3981.320 |
| 6 | 2 | 3981.330 |
| 7 | 2 | 3981.340 |

+ Accessories

Vertical EMC gasket
see page 146

Carrying handles



For ergonomic transportation, even with stacked enclosures. May also be used as a support stand. Max. load capacity: 35 kg.

Material

Die-cast zinc and
Extruded aluminium section

Colour

RAL 7035

Note

Cannot be used with flanges

| For enclosure depth mm | Packs of | Order No. |
|------------------------|----------|-----------------|
| 250.4 | 2 | 3981.350 |
| 310.4 | 2 | 3981.360 |
| 370.4 | 2 | 3981.370 |
| 430.4 | 2 | 3981.380 |

Rear feet



For mounting on the rear of the enclosure. Dual function:

- Mechanical protection of the connection components
- Also act as a cable tidy during transportation

Material

PA
Self-extinguishing to UL 94-V0

Colour

RAL 7035

| Packs of | Order No. |
|----------|-----------------|
| 4 | 3901.000 |

INSTRUMENT CASES AND SYSTEM ENCLOSURES

RECOMMENDED ACCESSORIES HeiPac Vario-Module

Earthing set



For connecting the top and bottom covers to the side panels with PE conductors.

Supply includes

Conductor cable green/yellow, 1.5 mm², with washer for screw M4, flat-pin connector

| Packs of | Order No. |
|----------|-----------------|
| 1 | 9916.676 |

Front panels, hinged




Material

2.5 mm Aluminium
Anodised

Supply includes

1 front panel
1 set of hinges
Assembly parts

| U | HP | Order No. | |
|---|----|-------------------|---------------------|
| | | vertically hinged | horizontally hinged |
| 3 | 42 | 3652.600 | 3652.500 |
| 3 | 84 | 3652.610 | 3652.510 |
| 6 | 42 | 3652.620 | 3652.520 |
| 6 | 84 | 3652.630 | 3652.530 |



EMC front panels, hinged



Material


2.5 mm Aluminium
Clear-chromated

Supply includes


1 front panel
1 set of hinges
1 contact strip
1 gasket strip
1 vertical EMC gasket, version 1
Assembly parts

| U | HP | Order No. |
|---|----|---------------------|
| | | horizontally hinged |
| 3 | 84 | 3684.298 |
| 4 | 84 | 3684.299 |
| 6 | 84 | 3684.300 |
| 7 | 84 | 3684.301 |

EMC



Front panels as filler panel

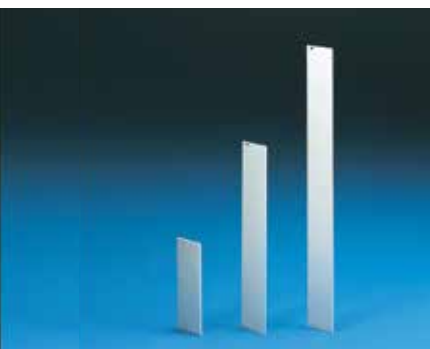

Flat


Material

2.5 mm Aluminium,
Natural-anodised

| HP | Order No. | | | | |
|----|------------------|------------------|-------------------|-------------------|------------------|
| | 2 U H = 84.25 | 3 U H = 128.7 | 4 U H = 173.15 | 6 U H = 262.05 | 7 U H = 306.5 |
| 42 | 3684.887 | 3684.904 | 3684.908 | 3684.925 | 3684.928 |
| 63 | - | 3684.906 | 3684.909 | 3684.926 | 3684.929 |
| 84 | 3684.888 | 3684.907 | 3684.910 | 3684.927 | 3684.930 |


+ Also required

Collar screws and plastic collars, packs of 100 sets, order No. 3658.160 see page 202



INSTRUMENT CASES AND SYSTEM ENCLOSURES RECOMMENDED ACCESSORIES HeiPac Vario-Module

EMC front panels as filler panels

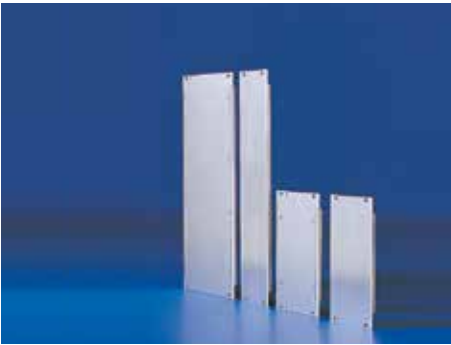

U-shaped

Material

2.5 mm extruded aluminium section,
Clear-chromated


Supply includes

1 front panel, one-piece
(with 2 – 14 HP version)
or three-piece
(with > 14 HP version),
1 vertical EMC gasket, version 1
1 contact strip (three-piece only)
1 gasket strip (three-piece only)

| HP | Order No. | | | | |
|----|------------------|------------------|-------------------|-------------------|------------------|
| | 2 U H = 84.25 | 3 U H = 128.7 | 4 U H = 173.15 | 6 U H = 262.05 | 7 U H = 306.5 |
| 42 | - | 3684.252 | 3684.255 | 3684.261 | 3684.264 |
| 63 | - | 3684.253 | 3684.256 | 3684.262 | 3684.265 |
| 84 | 3684.248 | 3684.254 | 3684.257 | 3684.263 | 3684.266 |

+ Also required

Slotted centering screws
packs of 100, order no. 3687.050
see page 203
Cross-head centering screws
packs of 100, order no. 3687.051
see page 203



Support stand/carrying handle



To fit HeiPac Vario Module 3 U, 4 U and 6 U,
adjustable on a 30° pitch pattern.

Material

Extruded aluminium section/die-cast

Colour

RAL 7035

Supply includes

Assembly parts

Note

Corner trim for support stands/carrying
handles should be ordered separately.

| For HeiPac Vario-Module HP | Packs of | Order No. |
|-------------------------------|----------|-----------------|
| 42 | 1 | 3981.390 |
| 63 | 1 | 3981.400 |
| 84 | 1 | 3981.410 |

| Corner trim for support stand U | Packs of | Order No. |
|------------------------------------|----------|-----------------|
| 3 | 2 | 3981.310 |
| 4 | 2 | 3981.500 |
| 6 | 2 | 3981.330 |

EMC gaskets, vertical



To ensure EMC protection between the
subracks side panel and the front/rear
panels.
There are two versions available.

Suitable for mounting on:

- 482,6 mm (19") flanges for subracks
- Corner trims, rear
- EMC contact strip
- U-channel front panels

Material

Stainless steel

German patent
No. 101 15 525 and
No. 198 46 627
US patent no. 6,500,012
US patent no. 7,044,753



Version 1: Segmented

| U | Order No. Packs of 1 | Order No. Packs of 10 |
|----|-------------------------|--------------------------|
| 1 | 3686.973 | 3684.236 |
| 2 | 3686.974 | 3684.237 |
| 3 | 3686.975 | 3684.238 |
| 4 | 3686.976 | 3684.239 |
| 6 | 3686.977 | 3684.240 |
| 7 | 3686.978 | 3684.241 |
| 9 | 3686.979 | 3684.242 |
| 10 | 3686.980 | 3684.243 |
| 11 | 3686.981 | 3684.244 |

Version 2: One-piece

| U | Order No. Packs of 1 | Order No. Packs of 10 |
|----|-------------------------|--------------------------|
| 2 | 3688.610 | - |
| 3 | 3688.611 | 9921.942 |
| 4 | 3688.612 | - |
| 5 | 3688.613 | - |
| 6 | 3688.614 | 9921.943 |
| 7 | 3688.615 | - |
| 8 | 3688.634 | - |
| 9 | 3688.616 | 9921.944 |
| 10 | 3688.609 | - |
| 11 | 3688.633 | - |
| 12 | 3688.606 | - |

INSTRUMENT CASES AND SYSTEM ENCLOSURES

HeiCase



Universal instrument case in a timeless design

Applications

The HeiCase is the HEITEC instrument case of sophisticated design that is suitable for 19" rack-mount systems as well as individual configuration. In combination with rollers and carrying handles the instrument case is particularly easy to transport.

Technical specifications

- Instrument case, complies with IEC 60 297-3
- Height: 1 – 12 HE
- Installation with: ½ 19" und 19"
- Depth: 300 – 540 mm
- Protection category IP 42
- Extruded aluminium section
- Variable depth/height interior installation

Benefits at a glance

- Outstanding stability
- Upgradeable to a tower version
- Standard in 3 colours
- Ergonomic handles, bottom- and door types
- For mobile and stationary applications




Flexible sizing through modular design



Wide range of accessories



Stable set up from aluminium profiles

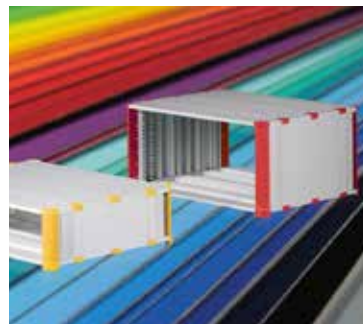

Individual colouring

High flexibility following customer requests



The modular line of standard casings can be manufactured to a height of up to 30 U and a depth of up to 900 mm.


Those maxi-versions are suitable for applications of high packing density as well as a mobile alternative to cabinets. Thanks to their set up of individual, interconnected extruded aluminium sections even the large versions provide a high degree of stability and are scalable not only in height, but also in depth (up to 900mm), modular in segments of 120mm.

If necessary, they can be mounted on rollers for mobile applications and can be equipped with specific handles, thus providing mobility and making the enclosure flexibly applicable despite its large dimensions. The carrying handles were tested to a load of 100kg and are suitable for heavy load applications.

The design of the enclosure can be customised to match the customer's corporate design. Decorative elements (corner trims and plastic parts) and even the system enclosure of the maxi versions can be designed in your desired RAL-color if required.

Due to their solid structure the customised versions meet the requirements for robust instrument case and system enclosures with scalable interior and exterior installations. Through a variety of accessories they can be adapted to the respective requirements.

HeiCase 1/2 19"

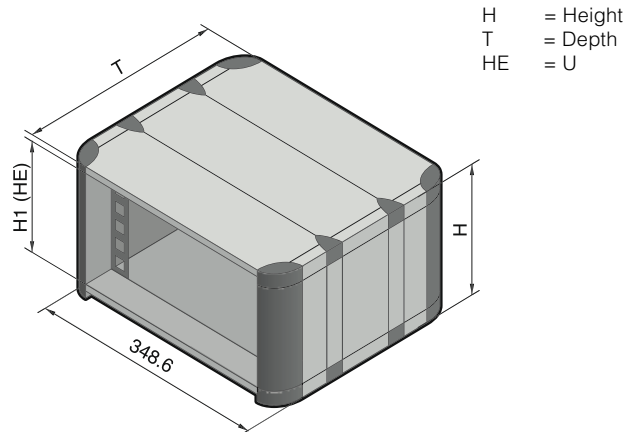

Technical specifications

Depth: 300 mm, 420mm, 540 mm
 Installation width: 269,2 mm (1/2 19")
 Installation options: 269,2 mm (1/2 19")-slide-in equipment to 60 297-3

Protection category

IP 42 for unvented version

Supply includes

- 2 side panels
 - 2 covers
 - 8 corner caps
 - 8/12/16 cover caps (300/420/540 mm depth)
 - 4 19" mounting brackets
 - 4 threaded inserts
 - 2 plain inserts,
 - 1 rear panel
- Cases are supplied preassembled

Colour

RAL 7035 (pale grey)

Decorative colours and corner caps

- RAL 5018 (turquoise)
- RAL 5012 (pale blue)
- RAL 7030 (stone grey)

Material/surface finish

- Covers: Extruded aluminium section/die-cast, spray-finished
- Side panels: Extruded aluminium section, spray-finished
- Corner caps: Plastic
- (19") mounting bracket: Extruded aluminium section, clear-chromated



Property rights

- German registered design no. 96 09 457
- UK reg. design no. 2064682
- US design patents
- Des. 402,640 and Des. 423,464
- Japan. reg. designs no. 1045507 and 1045508

| Enclosures for subrack width 269,2 mm (1/2 19") | Packs of | 1 U | | 2 U | | 3 U | | | 4 U | | Page |
|---|----------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------|
| | | | | | | | | | | | |
| Height (H) mm | | 77.5 | 77.5 | 121.9 | 121.9 | 166.4 | 166.4 | 166.4 | 210.8 | 210.8 | |
| H1 mm | | 45.0 | 45.0 | 89.4 | 89.4 | 133.8 | 133.8 | 133.8 | 178.3 | 178.3 | |
| Depth (T) mm | | 300.0 | 420.0 | 300.0 | 540.0 | 300.0 | 420.0 | 540.0 | 420.0 | 540.0 | |
| Unvented | | | | | | | | | | | |
| Order No. RAL 5018 | 1 | 3750.100 | - | 3750.200 | - | 3750.210 | 3750.300 | - | 3750.400 | - | |
| Order No. RAL 5012 | 1 | 3750.102 | - | 3750.202 | - | 3750.212 | 3750.302 | - | 3750.402 | - | |
| Order No. RAL 7030 | 1 | 3750.104 | - | 3750.204 | - | 3750.214 | 3750.304 | - | 3750.404 | - | |
| Vented | | | | | | | | | | | |
| Order No. RAL 5018 | 1 | - | 3750.110 | - | 3750.220 | - | 3750.350 | 3750.360 | - | 3750.450 | |
| Order No. RAL 5012 | 1 | - | 3750.112 | - | 3750.222 | - | 3750.352 | 3750.362 | - | 3750.452 | |
| Order No. RAL 7030 | 1 | - | 3750.114 | - | 3750.224 | - | 3750.354 | 3750.364 | - | 3750.454 | |
| Weight (kg) | vented/ | | 3.3 | 4.2 | 3.7 | 5.4 | 4.1 | 5.2 | 6.1 | 5.8 | 6.8 |
| | unvented | | 3.4 | 4.4 | 3.8 | 6.1 | 4.2 | 5.4 | 6.8 | 6.0 | 7.5 |
| Accessories | | | | | | | | | | | |
| Support stand/carrying handle | 1 | see page 120 | | | | | | | | | |
| Carrying handles, horizontal | 2 | 3751.250 | 3751.260 | 3751.250 | 3751.270 | 3751.250 | 3751.260 | 3751.270 | 3751.260 | 3751.270 | 118 |
| Back panel screw-fastened | 1 | - | - | - | - | 9918.119 | 9918.119 | 9918.119 | 9918.120 | 9918.120 | 121 |
| Front door, vertically hinged | 1 | - | - | - | - | 3751.300 | 3751.300 | 3751.300 | 3751.310 | 3751.310 | 119 |
| Slide rails | 2 | 3751.500 | 3751.510 | 3751.500 | 3751.520 | 3751.500 | 3751.510 | 3751.520 | 3751.510 | 3751.520 | 116 |
| Mounting angles 19° | 2 | 3751.650 | 3751.650 | 3751.660 | 3751.660 | 3751.670 | 3751.670 | 3751.670 | 3751.680 | 3751.680 | 116 |
| Threaded inserts with M4 thread | 8 | 3751.700 | 3751.700 | 3751.710 | 3751.710 | 3751.720 | 3751.720 | 3751.720 | 3751.730 | 3751.730 | 116 |
| End section | 4 | - | - | - | - | 3751.900 | 3751.900 | 3751.900 | 3751.910 | 3751.910 | 118 |

Other customised solutions regarding dimensions (up to 30 U height and up to 900 mm depth) and colouring are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

HeiCase 19"

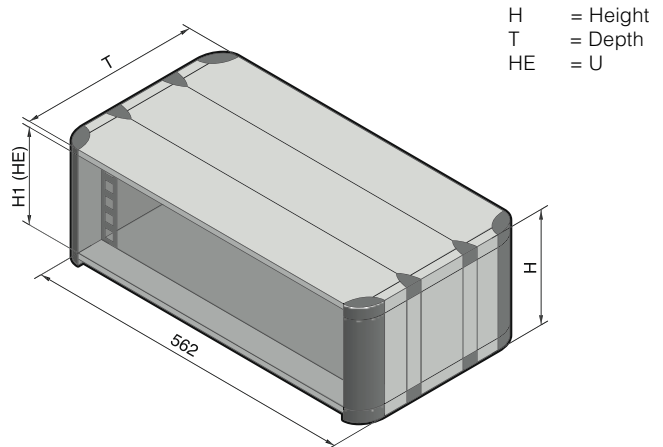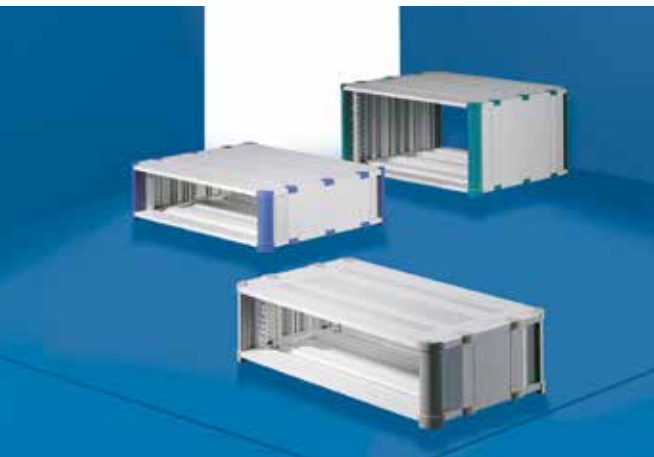

H = Height
T = Depth
HE = U

Technical specifications

Depth: 300 mm, 420mm, 540 mm
Installation width: 482,6 mm (19")
Installation options: 482,6 mm (19")-slide-in equipment to IEC 60 297-3

Protection category

IP 42 for unvented version

Supply includes

2 side panels
2 covers
8 corner caps
8/12/16 cover caps
(300/420/540 mm depth)
4 19" mounting brackets
4 threaded inserts
2 plain inserts
Cases are supplied preassembled

Note

For rear installation, order back panel/door separately.

Colour

RAL 7035 (pale grey)

Decorative colours and corner caps

RAL 5018 (turquoise)
RAL 5012 (pale blue)
RAL 7030 (stone grey)

Material/surface finish

Covers: Extruded aluminium section/die-cast, spray-finished
Side panels: Extruded aluminium section, spray-finished
Corner caps: Plastic
(19") mounting bracket: Extruded aluminium section, clear-chromated

Property rights

German registered design no. 96 09 457
UK reg. design no. 2064682
US design patents
Des. 402,640 and Des. 423,464
Japan. reg. designs no. 1045507 and 1045508

| Enclosures for subrack width 19" | Packs of | 3 U | | 4 U | | 6 U | | | 7 U | | 9 U | | 12 U | Page |
|----------------------------------|---------------------|--------------|------------|------------|------------|------------|------------|--------------|------------|--------------|--------------|--------------|--------------|------|
| Height (H) mm | | 166.4 | 166.4 | 210.8 | 210.8 | 299.7 | 299.7 | 299.7 | 344.2 | 344.2 | 433.1 | 433.1 | 566.5 | |
| H1 mm | | 133.8 | 133.8 | 178.3 | 178.3 | 267.2 | 267.2 | 267.2 | 311.7 | 311.7 | 400.6 | 400.6 | 534.0 | |
| Depth (T) mm | | 300.0 | 420.0 | 300.0 | 420.0 | 300.0 | 420.0 | 540.0 | 420.0 | 540.0 | 420.0 | 540.0 | 540.0 | |
| Unvented | | | | | | | | | | | | | | |
| Order No. RAL 5018 | 1 | 3750.310 | 3750.320 | 3750.410 | 3750.420 | 3750.600 | 3750.610 | 3750.620 | 3750.700 | 3750.710 | 3750.900 | 3750.910 | 3750.000 | |
| Order No. RAL 5012 | 1 | 3750.312 | 3750.322 | 3750.412 | 3750.422 | 3750.602 | 3750.612 | 3750.622 | 3750.702 | 3750.712 | 3750.902 | 3750.912 | 3750.002 | |
| Order No. RAL 7030 | 1 | 3750.314 | 3750.324 | 3750.414 | 3750.424 | 3750.604 | 3750.614 | 3750.624 | 3750.704 | 3750.714 | 3750.904 | 3750.914 | 3750.004 | |
| Vented | | | | | | | | | | | | | | |
| Order No. RAL 5018 | 1 | 3750.330 | 3750.340 | 3750.430 | 3750.440 | 3750.630 | 3750.640 | 3750.650 | 3750.720 | 3750.730 | 3750.920 | 3750.930 | 3750.030 | |
| Order No. RAL 5012 | 1 | 3750.332 | 3750.342 | 3750.432 | 3750.442 | 3750.632 | 3750.642 | 3750.652 | 3750.722 | 3750.732 | 3750.922 | 3750.932 | 3750.032 | |
| Order No. RAL 7030 | 1 | 3750.334 | 3750.344 | 3750.434 | 3750.444 | 3750.634 | 3750.644 | 3750.654 | 3750.724 | 3750.734 | 3750.924 | 3750.934 | 3750.034 | |
| Weight (kg) | vented/ unvented | 5.3 5.4 | 6.9 7.1 | 5.7 7.2 | 7.5 7.7 | 6.5 6.6 | 8.5 8.7 | 10.8 12.2 | 9.1 9.3 | 11.5 12.9 | 10.1 10.3 | 12.9 14.3 | 15.0 16.4 | |
| Accessories | | | | | | | | | | | | | | |
| Support stand/carrying handle | 1 | see page 120 | | | | | | | | | | | | |
| Carrying handles, horizontal | 2 | 3751.250 | 3751.260 | 3751.250 | 3751.260 | 3751.250 | 3751.260 | 3751.270 | 3751.260 | 3751.270 | 3751.260 | 3751.270 | 3751.270 | 118 |
| Back panel screw-fastened | 1 | 3751.600 | 3751.600 | 3751.610 | 3751.610 | 3751.620 | 3751.620 | 3751.620 | 3751.630 | 3751.630 | 3751.530 | 3751.530 | 3751.540 | 121 |
| Rear door, vertically hinged | 1 | 3751.100 | 3751.100 | 3751.110 | 3751.110 | 3751.120 | 3751.120 | 3751.120 | 3751.130 | 3751.130 | - | - | - | 121 |
| Rear door for fan installation | 1 | 3751.150 | 3751.150 | 3751.160 | 3751.160 | 3751.170 | 3751.170 | 3751.170 | 3751.180 | 3751.180 | - | - | - | 121 |
| Front door, vertically hinged | 1 | 3751.320 | 3751.320 | 3751.330 | 3751.330 | 3751.340 | 3751.340 | 3751.340 | 3751.350 | 3751.350 | - | - | - | 119 |
| Slide rails | 2 | 3751.500 | 3751.510 | 3751.500 | 3751.510 | 3751.500 | 3751.510 | 3751.520 | 3751.510 | 3751.520 | 3751.510 | 3751.510 | 3751.520 | 116 |
| Mounting angles 19" | 2 | 3751.670 | 3751.670 | 3751.680 | 3751.680 | 3751.690 | 3751.690 | 3751.690 | 3751.640 | 3751.640 | 3751.780 | 3751.780 | 3751.790 | 116 |
| Threaded inserts with M4 thread | 8 | 3751.720 | 3751.720 | 3751.730 | 3751.730 | 3751.740 | 3751.740 | 3751.740 | 3751.750 | 3751.750 | 3751.760 | 3751.760 | 3751.770 | 116 |
| End section | 2 | 3751.900 | 3751.900 | 3751.910 | 3751.910 | 3751.920 | 3751.920 | 3751.920 | 3751.930 | 3751.930 | 3751.820 | 3751.820 | 3751.830 | 118 |

Other customised solutions regarding dimensions (up to 30 U height and up to 900 mm depth) and colouring are available upon request. Please get in contact with one of our sales representatives for further assistance: [Tel. +49 9126 - 29 34 0](tel:+49912629340)

Accessories and services for HeiCase

In addition to the presented subrack-kits, we offer components for your individual configuration on the following pages

WE MEET YOUR INDIVIDUAL NEEDS!

You are looking for a product in the field of electronic packaging that is not in our catalogue? Please contact us! Due to our extensive range of services we can meet all your demands.

We will gladly submit a tailored quotation.

Phone: 09126 - 29 34 0

E-Mail: eps-quote@heitec.de



INSTRUMENT CASES AND SYSTEM ENCLOSURES

RECOMMENDED ACCESSORIES HeiCase

Mounting angles for 482,6 mm (19")



For front installation of subracks and blanking plates.

Material

Extruded aluminium section
Clear-chromated

Supply includes

Assembly parts

Note

1 pack of threaded inserts and 2 packs of mounting rails and spacers are required for depth-adjustable installation.

| For enclosure height U | Packs of | Order No. |
|------------------------|----------|-----------|
| 1 | 2 | 3751.650 |
| 2 | 2 | 3751.660 |
| 3 | 2 | 3751.670 |
| 4 | 2 | 3751.680 |
| 6 | 2 | 3751.690 |
| 7 | 2 | 3751.640 |
| 9 | 2 | 3751.780 |
| 12 | 2 | 3751.790 |

+ Also required

Threaded inserts, see page 116
Mounting rails, see page 117
Spacers, see page 117

Threaded inserts



With M4 thread for HeiCase

For the installation of mounting angles, slide rails, mounting kits, cable ducts etc. Simply slide into the channels in the side panels.

Material

Extruded aluminium section
Clear-chromated

| For enclosure height U | Packs of | Order No. |
|------------------------|----------|-----------|
| 1 | 8 | 3751.700 |
| 2 | 8 | 3751.710 |
| 3 | 8 | 3751.720 |
| 4 | 8 | 3751.730 |
| 6 | 8 | 3751.740 |
| 7 | 8 | 3751.750 |
| 9 | 8 | 3751.760 |
| 12 | 8 | 3751.770 |

Slide rails



To support heavy installed equipment.

Material

1,5 mm sheet steel,
Clear-chromated

Supply includes

Assembly parts

| For enclosure depth mm | Packs of | Order No. |
|------------------------|----------|-----------|
| 300 | 2 | 3751.500 |
| 420 | 2 | 3751.510 |
| 540 | 2 | 3751.520 |
| 660 | 2 | 9919.472 |

+ Also required

Threaded inserts, see page 116

Mounting rails



- For depth-variable installation of mounting angles
- For the installation of component shelves, static or pull-out

Material

Aluminium
Clear-chromated

Supply includes

Assembly parts


A Version for depth-variable mounting angles

- 1** Threaded inserts
- 2** Short spacers
- 3** Mounting rails

| For enclosure depth mm | Packs of | Order No. |
|------------------------|----------|-----------------|
| 300 | 2 | 3751.400 |
| 420 | 2 | 3751.410 |
| 540 | 2 | 3751.420 |

+ Also required

Threaded inserts, see page 116
Spacers, see page 117



Spacers



For the attachment of mounting rails.

| Design | Packs of | Order No. |
|---|----------|-----------------|
| Short for depth-variable mounting bracket | 4 | 3751.450 |
| long for mounting plate installation (width 409 mm) | 4 | 3751.460 |

INSTRUMENT CASES AND SYSTEM ENCLOSURES

RECOMMENDED ACCESSORIES HeiCase

Earthing set



To meet electrical protective measures; fits all HeiCase enclosures.

Supply includes

Threaded insert, screw, green/yellow connection cable, serrated washer, nut

| Packs of | Order No. |
|----------|-----------------|
| 4 | 3798.000 |

Rear trim



To cover the sides to the left and right of the subrack when no rear door or rear panel is used.

Material

Extruded aluminium section
Spray-finished


Colour

RAL 7035

Supply includes

Assembly parts

| For enclosure height U | Packs of | Order No. |
|------------------------|----------|-----------------|
| 3 | 2 | 3751.900 |
| 4 | 2 | 3751.910 |
| 6 | 2 | 3751.920 |
| 7 | 2 | 3751.930 |
| 9 | 2 | 3751.820 |
| 12 | 2 | 3751.830 |



Carrying handles



Horizontal

For easy, secure transportation.

- May be retrofitted
- Load capacity 100 kg

Material

Side parts: Die-cast, spray-finished
Centre part: Extruded aluminium section
spray-finished

Colour

RAL 7035

Supply includes

Assembly parts

| For enclosure depth mm | Packs of | Order No. |
|------------------------|----------|-----------------|
| 300 | 2 | 3751.250 |
| 420 | 2 | 3751.260 |
| 540 | 2 | 3751.270 |

INSTRUMENT CASES AND SYSTEM ENCLOSURES

RECOMMENDED ACCESSORIES HeiCase

Keyboard lid



Suitable for the installation of 19" keyboards

- Horizontally hinged with security lock
- Removable cover plate

Material

Frame section: Extruded aluminium section/
die-cast, spray-finished
Base and cover plate: Aluminium, spray-
finished


Colour

RAL 7035

Supply includes

Assembly parts

| For enclosure width | Height (H) U | Packs of | Order No. |
|---------------------|--------------|----------|-----------------|
| 19" | 4 | 1 | 3751.800 |
| 19" | 6 | 1 | 3751.810 |

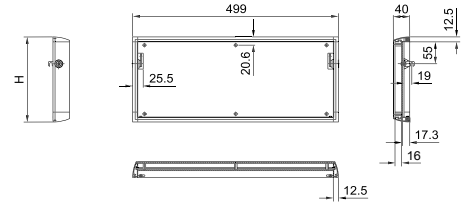

Front door with smoked acrylic, vertically hinged



For mechanical protection of built-in control components.

- Optionally hinged on the right or left
- With security lock

Material

Frame section: Extruded aluminium section,
Spray-finished
Corner pieces: Die-cast aluminium,
Spray-finished
Glazed pane: Smoked acrylic

Colour

RAL 7035


Supply includes

Assembly parts

Note

The figure shows the 6 U version; solutions smaller than 6 U feature a front door with only one security lock.

| For enclosure width | W mm | Height (H) U | Order No. |
|---------------------|------|--------------|-----------------|
| ½ 19" | 289 | 3 | 3751.300 |
| ½ 19" | 289 | 4 | 3751.310 |
| 19" | 503 | 3 | 3751.320 |
| 19" | 503 | 4 | 3751.330 |
| 19" | 503 | 6 | 3751.340 |
| 19" | 503 | 7 | 3751.350 |

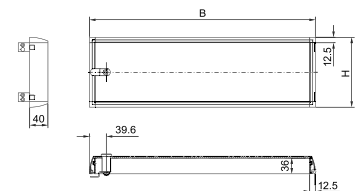

INSTRUMENT CASES AND SYSTEM ENCLOSURES

RECOMMENDED ACCESSORIES HeiCase

Aluminium front door, vertically hinged



For mechanical protection of built-in control components.

- Optionally hinged on the right or left
- With security lock

Material

Frame section: Extruded aluminium section, spray-finished
 Corner pieces: Die-cast aluminium, spray-finished
 Aluminium plate

Colour

RAL 7035


Supply includes

Assembly parts


Note

The figure shows the 6 U version; solutions smaller than 6 U feature a front door with only one security lock.

| For enclosure width | W mm | Height (H) U | Order No. |
|---------------------|------|--------------|-----------------|
| 19" | 503 | 3 | 3751.360 |
| 19" | 503 | 4 | 3751.370 |
| 19" | 503 | 6 | 3751.380 |

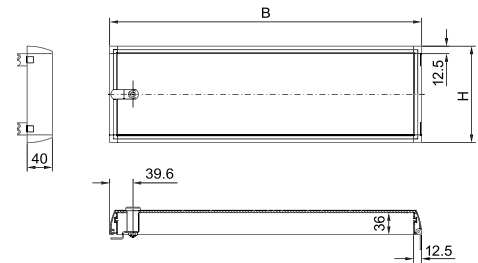

Tower feet

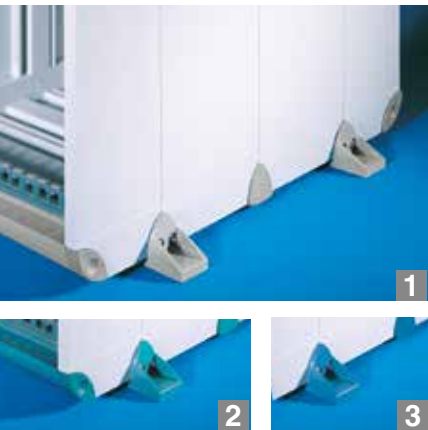

For vertical siting of enclosures.
 May be retrofitted.

Material

Plastic to UL 94-V0,
 Self-extinguishing

Decorative colours

- 1 RAL 7030 (stone grey)
- 2 RAL 5018 (turquoise)
- 3 RAL 5012 (pale blue)

Supply includes

4 tower feet
 Assembly parts

| Decorative colour RAL | Packs of | Order No. |
|-----------------------|----------|-----------------|
| 5018 | 1 set | 3751.850 |
| 5012 | 1 set | 3751.852 |
| 7030 | 1 set | 3751.854 |

Support stand/carrying handles



- Support stand/carrying handle adjustable in 30° increments
- Suitable for retro-fitting to 2 – 7 U
- For ½ 19" and 19" enclosures
- Load capacity 30 kg

Material

Hinged part: Die-cast, spray finished in RAL 7035,
 Centre part: Extruded aluminium section, spray finished in RAL 7035 with plastic coating

Decorative colour


- 1 RAL 7030 (stone grey)
- 2 RAL 5018 (turquoise)
- 3 RAL 5012 (pale blue)

Supply includes

1 support stand/carrying handle
 Assembly parts

| For enclosure width | W mm | Colour RAL | Order No. |
|---------------------|------|------------|-----------------|
| ½ 19" | 392 | 5018 | 3751.200 |
| ½ 19" | 392 | 5012 | 3751.202 |
| ½ 19" | 392 | 7030 | 3751.204 |
| 19" | 605 | 5018 | 3751.210 |
| 19" | 605 | 5012 | 3751.212 |
| 19" | 605 | 7030 | 3751.214 |

W = total width handle
 PU = 1 set

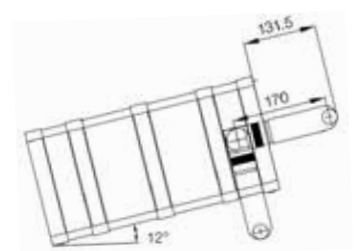

NEW

INSTRUMENT CASES AND SYSTEM ENCLOSURES

RECOMMENDED ACCESSORIES HeiCase

Back panel, screw-fastened



To close off the rear.


Material

Aluminium, 2 mm,
Natural-anodised

Supply includes

2 19" mounting brackets
Assembly parts

| Height(H) U | Packs of | Order No. | |
|----------------|-------------|--------------------------------|----------------------------|
| | | enclosure width L = 1/2 19" | enclosure width L = 19" |
| 3 | 1 | 9918.119 | 3751.600 |
| 4 | 1 | 9918.120 | 3751.610 |
| 6 | 1 | 9918.121 | 3751.620 |
| 7 | 1 | 9918.122 | 3751.630 |
| 9 | 1 | 9918.123 | 3751.530 |
| 12 | 1 | 9918.125 | 3751.540 |



Rear door, vertically hinged



To close off the rear.

- Hinged, with security lock
- Optionally hinged on the left or right

Material

Aluminium, 2,5 mm
Spray-finished


Colour

RAL 7035

Supply includes

Assembly parts

| For enclosure width | Height (H) U | Packs of | Order No. |
|---------------------|-----------------|----------|-----------------|
| 19" | 3 | 1 | 3751.100 |
| 19" | 4 | 1 | 3751.110 |
| 19" | 6 | 1 | 3751.120 |
| 19" | 7 | 1 | 3751.130 |



Rear door for fan installation



To close off the rear.

- With security lock
- For the installation of 120 mm fans
- Optionally hinged on the left or right
- For the installation of two fans

Material

Aluminium, 2,5 mm
Spray-finished


Colour

RAL 7035

Supply includes

Assembly parts

| For enclosure width | Height (H) U | H1 mm | Order No. |
|---------------------|-----------------|----------|-----------------|
| 19" | 3 | 66.65 | 3751.150 |
| 19" | 4 | 88.90 | 3751.160 |
| 19" | 6 | 83.50 | 3751.170 |
| 19" | 7 | 83.50 | 3751.180 |

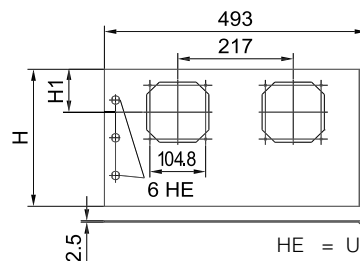

INSTRUMENT CASES AND SYSTEM ENCLOSURES

APPLICATION EXAMPLE

Transportation



Flexible bench chassis for function testing systems in automotive industry

Compact and flexible system chassis are playing an increasingly important role in the automotive industry as a substitute for control cabinets. A HEITEC customer had this exact requirement for a car seat function testing system. In this case, it was essential to be able to fit the system without difficulty below the conveyor belts transporting the car seats.

Considering its dimensions, a standard control cabinet would have been out of the question for this application. The HEITEC HeiCase is an ideal substitute in such situations. Thanks to its flexible assembly options, made possible by the use of aluminum extruded cross-sections, the HeiCase can be precisely adapted to actual spatial conditions on-site. That makes it much more flexible than a standard control cabinet, and just as sturdy.

In addition, the system also had to be easy to transport, despite the many built-in items that add considerable weight. This was solved by using flexible transport rollers with a locking brake, which made it possible to transport the unit without difficulty even on uneven surfaces.

Besides producing the casing in the customer's corporate design colours, HEITEC also had to ensure sufficient protection against environmental contaminants such as dust, and so the HeiCase was supplied in protection class IP52.

The chassis also had to be easily protected against unauthorised access – but the customer did not want a normal key for the system. All of the chassis had to be lockable using the same tool. That would prevent the risk of mixing up keys and minimize the chance of losing them. The solution was a tool-based four-sided warded lock that provides a simple, yet effective locking option.



Technical Summary

- Customer-specific system chassis
- Transport rollers with locking brake
- L x W x H: 660 mm x 19" x 7U
- Design elements in RAL 5017
- Tool-based locking options (4-sided warded lock)

Customer Benefits

- Appealing, timeless exterior to suit corporate design requirements
- High level of protection against environmental influences such as dust
- Transport rollers with locking brake ensure easy transportation of the system chassis even with multiple built-in elements
- Small form factor saves space, enabling the unit to be installed even in compact locations
- Locking technology easy to use
- Cost-optimised chassis concept

Industrial control


Mobile data collection in an industrial environment

Mobile, Internet-supported data collection and the corresponding communications tools are now essential elements in the manufacturing processes of many industrial firms. That's why HEITEC developed a system solution for one of its customers that enabled it to gather complex measurement data for its in-house liquid filter system manufacturing processes.

High standards were set for both the electronics and the mechanical aspects. First, the system had to function reliably even when exposed to major temperature fluctuations and strong impacts and vibrations. It also had to be unaffected by splashing water, dust or grease. Maintenance had to be as simple as possible, with due consideration for the technical requirements.

The entire complex system was integrated into a HeiPac Vario-Modul measuring 310 mm x 42HP x 4U (L x W x H), a standard element in HEITEC's portfolio. The HeiPac Vario-Modul is cost-effective, with an excellent compact, stable, full-metal casing that proved to be ideally suited for this application. In accordance with customer specifications, the front and side panels were produced in the customer's corporate design and the side panels given new colours – no further adjustments to the standard product were needed. The front plate contains the connections for the four different measuring modules that are supplied internally with a voltage of 24V. The back contains a switchable combination module for power input and a covered, grounded socket to supply power to a laptop. There is also a USB port and an attachment for an external power supply for a laptop. A grounding terminal on the back also enables the entire system to be fully grounded.

The use of fans was avoided to protect the electronics, with their complicated wiring, against harmful external influences. To ensure proper heat regulation with high electromagnetic compatibility, the components were appropriately spaced on a full aluminum mounting plate to guarantee passive heat dissipation for the system. Standardised solutions were used for the hardware and software components where possible, to keep the cost of the entire system as low as possible.

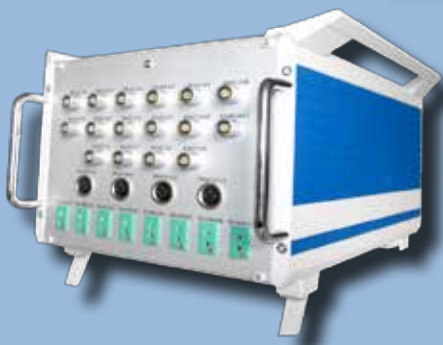

Technical Summary

- Customer-specific system solution
- Standard HEITEC chassis with colours adapted to suit customer's corporate design (RAL5005)
- Internal power management (24V) for measurement components
- L x W x H: 310 mm x 42HP x 4U
- Power supply: 230V mains voltage
- Highly effective EMC protection
- Stable, compact, full-metal casing with integrated mounting plate (side panels and transverse sections made of aluminum extruded cross-section and corner frames of sturdy die-cast zinc)

Customer Benefits

- Plug & Play system solution
- Powerful system makes it easy to handle large data volumes
- Good tightness to protect against harmful external influences, such as dust and dirt
- High shock and vibration resistance
- Good accessibility despite elaborate wiring ensures ease of maintenance
- Optimised passive heat dissipation
- Recorded data can be read out easily via laptop using a USB connection
- Reasonably priced overall system



COMPONENTS AND ACCESSORIES

Besides complete subrack and system solutions HEITEC offers a wide range of individual components and accessories for setup, mounting and upgrade.

Our inside and outside sales staff will gladly help you to find the right selection of components and support you in compiling the optimum package to fulfill your individual preferences and requirements.

Side panels and flanges



→ Page 126

Horizontal rails



→ Page 132

Components for EMC installation



→ Page 145

Extension kits



→ Page 150

Guide rails



→ Page 154

Covers



→ Page 161

Front panels, handles



→ Page 165

Cassettes



→ Page 182

Ventilation



→ Page 190

Power supplies



→ Page 194

Assembly parts




→ Page 202

COMPONENTS AND ACCESSORIES

SIDE PANELS

Side panels for HeiPac Vario

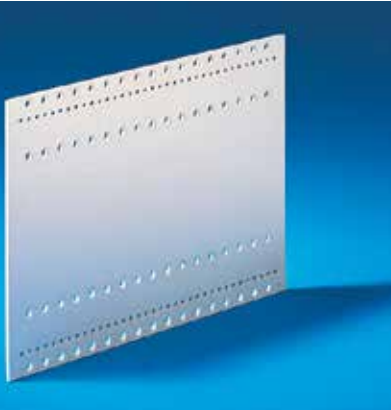


Mounting holes and anti-twist half-shears on a 10 mm pitch pattern.

Material

2.5 mm Aluminium,
Clear-chromated

| U | | | Order No. | | | | | | | | | | |
|-------------|-----------------------|-------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|---|---|
| | | | 3 | 4 (3 + 1) | 4 (3 + 2 x 1/2) | 6 | 7 (6 + 1) | 7 (6 + 2 x 1/2) | 9 | 10 | 11 | | |
| D (T) mm | a ¹⁾ mm | Packs of | | | | | | | | | | | |
| 175 | 150 | 1 | 9901.021 | - | - | 9901.023 | - | - | - | - | - | - | - |
| 185 | 160 | 1 | 3684.511 | - | - | 3684.529 | - | - | - | - | - | - | - |
| 225 | 200 | 1 | 3684.512 | 3685.793 | 3685.890 | 3684.530 | 3685.896 | 3685.893 | 3685.797 | - | - | - | - |
| 245 | 220 | 1 | 3684.513 | 3685.850 | 3685.891 | 3684.531 | 3685.897 | 3685.894 | - | - | - | - | - |
| 285 | 260 | 1 | 3684.514 | 3684.523 | 3684.526 | 3684.532 | 3685.743 | 3685.895 | - | - | - | - | - |
| 305 | 280 | 1 | 3684.515 | 3685.794 | - | 3684.533 | - | - | 3685.798 | - | - | - | - |
| 345 | 320 | 1 | 3684.516 | 3684.524 | 3684.527 | 3684.534 | 3685.744 | 3685.745 | 3684.547 | - | - | - | - |
| 365 | 340 | 1 | 3684.517 | 3685.795 | - | 3684.535 | - | - | 3685.799 | - | - | - | - |
| 405 | 380 | 1 | 3684.518 | 3684.525 | 3684.528 | 3684.536 | 3684.541 | 3684.543 | 3684.548 | 3684.545 | - | - | - |
| 425 | 400 | 1 | 3684.519 | - | - | 3684.537 | - | - | - | - | - | - | - |
| 465 | 440 | 1 | 3684.520 | 3685.796 | 3685.892 | 3684.538 | 3684.542 | 3684.544 | 3684.549 | 3684.546 | 3684.552 | - | - |
| 525 | 500 | 1 | 3684.521 | 9906.727 | - | 3684.539 | 3685.898 | 3685.959 | 3684.550 | 3685.899 | 3684.553 | - | - |
| 585 | 560 | 1 | 3684.522 | 9906.914 | - | 3684.540 | - | - | 3684.551 | - | 3684.554 | - | - |

¹⁾ a = Distance between the first and last mounting hole.

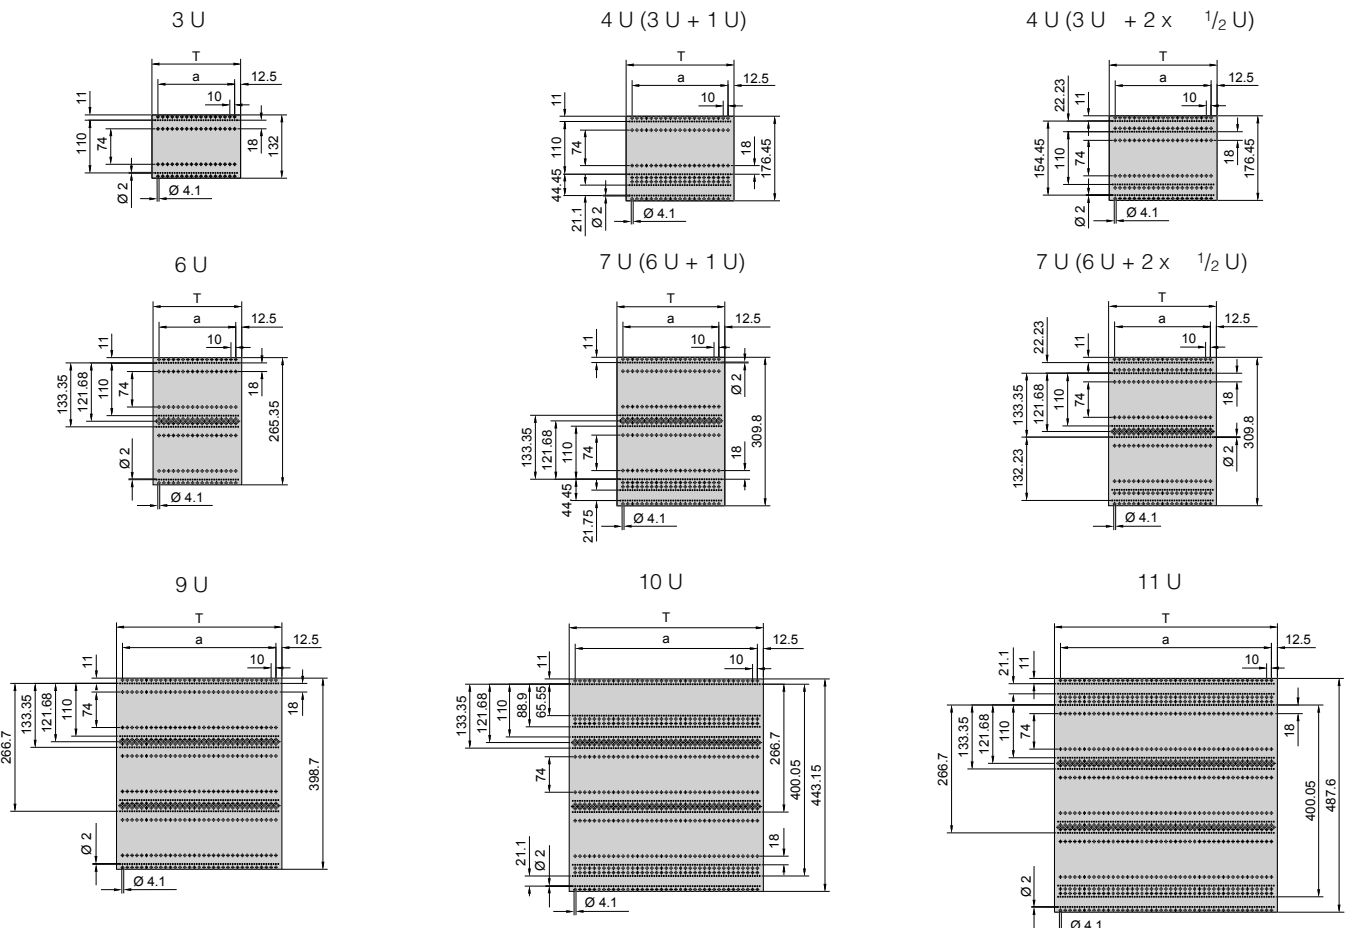

Side panels for HeiPac Vario ECO



Mounting holes on a 10 mm pitch pattern.



Material

1.5 mm sheet steel
Zinc-plated


| D (T) mm | Packs of | Max. board depth mm | Order No. | |
|-------------|----------|------------------------|-----------------|-----------------|
| | | | 3 U | 6 U |
| 175 | 1 | 160 | 3688.100 | 3688.102 |
| 235 | 1 | 220 | 3688.101 | 3688.103 |

+ Accessories

Flanges for HeiPac ECO
see page 129

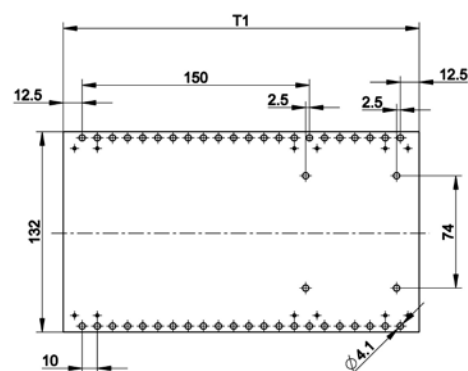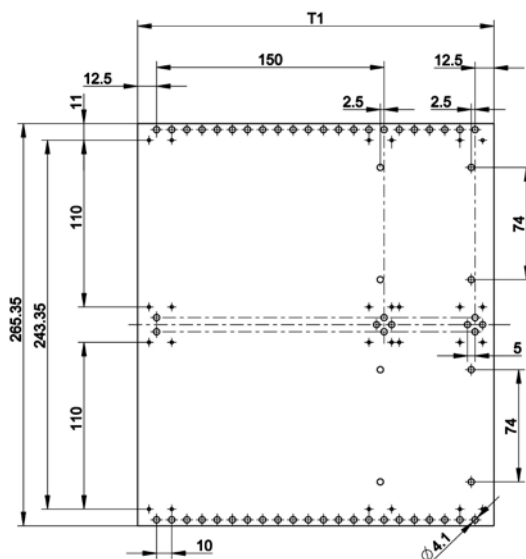

Side panels for HeiPac EASY

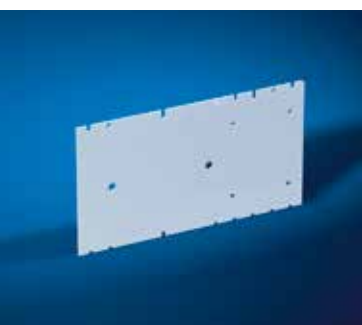

Mounting holes on a 60 mm pitch pattern as long holes
Drill holes for mounting telescopic slides

Material



2 mm Aluminium
Non-corrosive

| D (T) mm | L2 | n | n1 | Packs of | Max. board depth mm | Order No. | |
|-------------|----|---|----|----------|------------------------|-----------------|-----------------|
| | | | | | | 3 U | 6 U |
| 175 | - | - | - | 2 | 160 | 3634.695 | 3634.720 |
| 235 | 60 | - | - | 2 | 220 | 3634.700 | 3634.725 |
| 295 | 60 | 2 | 2 | 2 | 280 | 3634.705 | 3634.730 |
| 355 | 60 | 3 | 3 | 2 | 340 | 3634.710 | 3634.735 |
| 415 | 60 | 4 | 3 | 2 | 400 | 3634.715 | 3634.740 |

- 1** Mounting holes suitable for threaded insert PEM-FM4-1 for mounting telescopic slides

+ Accessories

Flanges for HeiPac EASY
see page 129

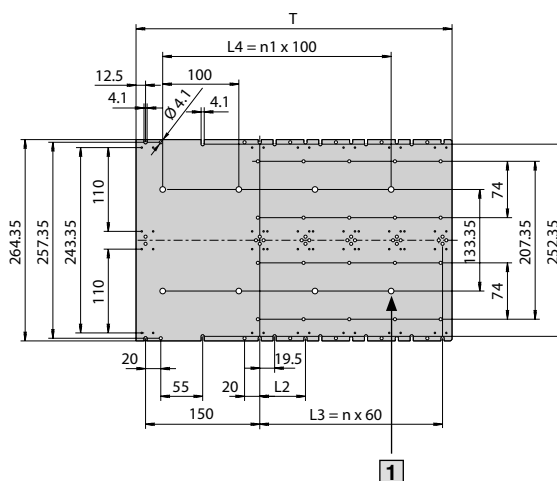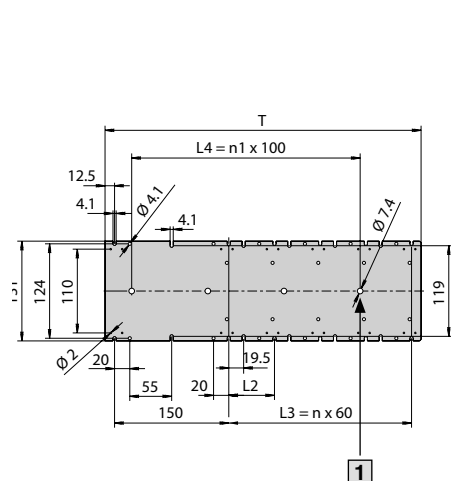

COMPONENTS AND ACCESSORIES

FLANGES

Flanges 19" for HeiPac Vario



With integral channel to accommodate EMC gaskets.

Material

Extruded aluminum section



Surface finish

Clear-chromated

| U | Packs of | Order No. | |
|----|----------|-------------------|----------------------|
| | | with handle holes | without handle holes |
| 2 | 1 | - | 3684.614 |
| 3 | 1 | 3684.622 | 3684.615 |
| 4 | 1 | 3684.623 | 3684.616 |
| 6 | 1 | 3684.624 | 3684.617 |
| 7 | 1 | 3684.625 | 3684.618 |
| 9 | 1 | - | 3684.619 |
| 10 | 1 | - | 3684.620 |
| 11 | 1 | - | 3684.621 |

+ Accessories

EMC gaskets, vertical
see page 146
Handles for subrack
see page 57



Flanges 19" for HeiPac Vario, set-back



Material

Extruded aluminum section



Surface finish

Clear-chromated


| U | Packs of | Order No. |
|----|----------|-----------------|
| 3 | 1 | 3684.626 |
| 4 | 1 | 3684.627 |
| 6 | 1 | 3684.628 |
| 7 | 1 | 3684.629 |
| 9 | 1 | 3684.630 |
| 10 | 1 | 3684.631 |
| 11 | 1 | 3684.632 |

+ Also required

Assembly screws, nuts and washers
packs of 4 sets, Order No. 3687.015
see page 203



Flanges 19" for HeiPac Vario, reinforced

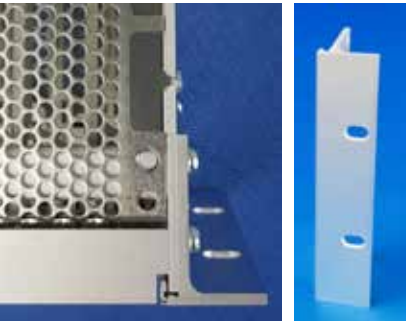

NEW

Reinforced flange ensures a high level of stability even under extreme loads.

Material

Extruded aluminum section
3 mm material thickness



Surface finish

Clear-chromated


| U | Packs of | Order No. | |
|---|----------|-------------------|----------------------|
| | | with handle holes | without handle holes |
| 3 | 1 | 9921.725 | 9914.268 |
| 6 | 1 | 9921.726 | 9921.721 |

+ Accessories

Handles for subrack
see page 57



Flanges 19" for HeiPac Vario ECO

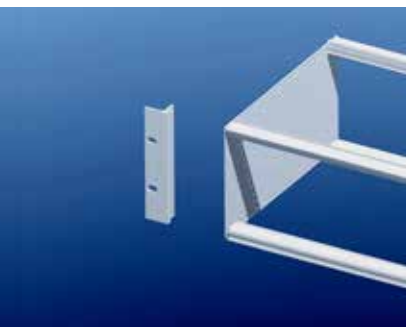



Material

Extruded aluminum section

Surface finish

Clear-chromated

| U | Packs of | Order No. |
|---|----------|-----------------|
| 3 | 1 | 3688.110 |
| 6 | 1 | 3688.111 |



Flanges 19" for HeiPac EASY



Integrated mounting holes for installation of handles

Material

Extruded aluminium section



Surface finish

Pre-anodised

| U | Packs of | Order No. |
|---|----------|-----------------|
| 3 | 2 | 3634.745 |
| 6 | 2 | 3634.750 |

+ Accessories

Handles for subrack
see page 57



COMPONENTS AND ACCESSORIES




HORIZONTAL RAILS HeiPac Vario HeiPac Vario

Overview horizontal rails HeiPac Vario

































| Main sections | V 1 Front horizontal rail | V 2 Front horizontal rail, with double screw fastening | V 3 Double front horizontal rail | V-Ext. 1 Front horizontal rail, with 10 mm extension, for extractor handle type IV or VII | V-Ext. 2 Double front horizontal rail, with 10 mm extension | V-Ext. 3 Front horizontal rail, with 10 mm extension, with double screw fastening | V-Ext. 4 Double front horizontal rail, with 10 mm extension | BP 1 Rear horizontal rail | BP 2 Rear horizontal rail, with double screw fastening |
|---|------------------------------|---|-------------------------------------|--|--|--|--|------------------------------|---|
| | Page 132 | Page 132 | Page 133 | Page 133 | Page 134 | Page 134 | Page 135 | Page 135 | Page 136 |
| Additional sections | | | | | | | | | |
| E Adaptor rail, rear centre, to accommodate guide rails | - | - | - | - | - | - | - | - | - |
| Page 140 | | | | | | | | | |
| F Z rail for connector | - | - | - | - | - | - | - | | |
| Page 144 | | | | | | | | | |
| G Insulating strip ¹⁾ | - | - | - | - | - | - | - | | |
| Page 145 | | | | | | | | | |
| H Conductive strip ²⁾ | - | - | - | - | - | - | - | | |
| Page 145 | | | | | | | | | |
| I Threaded insert | | | | | | | | - | |
| Page 144 | | | | | | | | | |
| J Identification strips | | | | | | | | | |
| Page 144 | | | | | | | | | |
| K EMC gaskets, horizontal | | | | | | | | - | - |
| Page 145 | | | | | | | | | |

For ¹⁾insulated or ²⁾conductive attachment of backplanes.

All system requirements may be covered with just a few basic types of horizontal rail. A cost-effective, easy-to-manage range.



Overview horizontal rails HeiPac Vario

| Main sections | BP 3 Rear horizontal rail | BP 4 Rear horizontal rail | BP 5 Rear horizontal rail | BP-M 1 Rear horizontal rail, centre | BP-M 2 Rear horizontal rail, centre (also for HeiPac EASY) | CON 1 Rear horizontal rail, with integral Z rail | CON 2 Rear horizontal rail, with integral Z rail | CON-M 1 Rear horizontal rail, with integral Z rail (also for HeiPac EASY) |
|--|---|---|---|---|--|---|---|---|
| | Page 136 | Page 137 | Page 137 | Page 138 | Page 138 | Page 139 | Page 139 | Page 140 |
| Additional sections |  |  |  |  |  |  |  |  |
| E Adaptor rail, rear centre, to accommodate guide rails  | - | - | - |  |  | - | - |  |
| Page 140 | | | | | | | | |
| F Z rail for connector  |  | - | - |  | - | - | - | - |
| Page 144 | | | | | | | | |
| G Insulating strip ¹⁾  |  | - | - |  | - | - | - | - |
| Page 145 | | | | | | | | |
| H Conductive strip ²⁾  |  | - | - |  | - | - | - | - |
| Page 145 | | | | | | | | |
| I Threaded insert  |  | - | - | - | - |  |  |  |
| Page 144 | | | | | | | | |
| J Identification strips  |  |  |  | - | - |  | - | - |
| Page 144 | | | | | | | | |
| K EMC gaskets, horizontal  | - | - | - | - | - | - | - | - |
| Page 145 | | | | | | | | |

For ¹⁾insulated or ²⁾conductive attachment of backplanes.

COMPONENTS AND ACCESSORIES

HORIZONTAL RAILS HeiPac Vario

Horizontal rail Vario V 1, front



To accommodate guide rails and for the attachment of front panels

- Front projection 2.5 mm corresponding to IEC 60 297-3-101
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole
- Horizontal rail 192 HP without machining on the end faces. Suitable for cutting to length

Material

Extruded aluminium section

Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. unprinted | Order No. printed |
|-------------------|----------|------------------------------|------------------------------|
| 4 (left) | 1 | 3684.592 | - |
| 4 (right) | 1 | 3684.955 | - |
| 8 (left) | 1 | 3684.593 | - |
| 8 (right) | 1 | 3684.956 | - |
| 12 | 1 | 3684.594 | - |
| 16 | 1 | 3684.595 | - |
| 20 | 1 | 3684.596 | - |
| 21 | 1 | 3685.985 | - |
| 40 | 1 | 3684.960 | - |
| 42 | 1 | 3684.560 | 9921.788³⁾ |
| 63 | 1 | 3684.561 | - |
| 84 | 1 | 3684.562 | 9921.789³⁾ |
| 84 | 2 | 3685.267¹⁾ | - |
| 192 | 1 | 3688.000²⁾ | - |

¹⁾ Including 4 assembly screws

²⁾ Anodised



³⁾ with HP pattern printing

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1, order no. 3684.610
see page 144

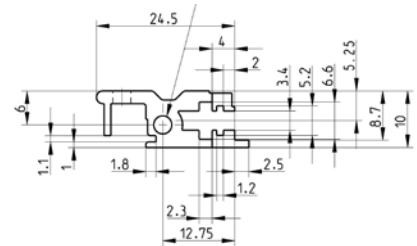

Horizontal rail Vario V 2, front, with double screw fastening



To accommodate guide rails and for the attachment of front panels. The double screw fastening ensures a high level of stability even under extreme loads.

- Front projection 2.5 mm corresponding to IEC 60 297-3-101
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole
- Load test to DIN EN/IEC 61 587-1, requirement level SL1
- Shock and vibration tests undertaken as per IEC 61 373 (DIN EN 50 155), Category 1, Class B

Material

Extruded aluminium section

Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. unprinted | Order No. printed |
|-------------------|----------|---------------------|------------------------------|
| 84 | 1 | 9908.721 | 9921.793¹⁾ |



¹⁾ with HP pattern printing

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1, order no. 3684.610
see page 144



Horizontal rail Vario V 3, front



NEW

To accommodate guide rails and for the attachment of front panels. For subdivision i. e. 6 U in 2 x 3 U.


- Front projection 2.5 mm corresponding to IEC 60 297-3-101
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated




| Usable width (HP) | Packs of | Order No. unprinted | Order No. printed |
|-------------------|----------|---------------------|------------------------------|
| 84 | 1 | 9904.745 | 9921.799¹⁾ |

¹⁾ with HP pattern printing

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202



Horizontal rail Vario V-Ext. 1, front, with 10 mm extension



For type IV, IVs and VII injector/extractor handle

To accommodate guide rails and for the attachment of front panels.


- Front projection 10 mm corresponding to IEEE 1101.10 and IEC 60 297-3-102
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. unprinted | Order No. printed |
|-------------------|----------|------------------------------|------------------------------|
| 40 | 1 | 3684.961 | - |
| 42 | 1 | 3684.565 | 9921.790³⁾ |
| 63 | 1 | 3684.566 | - |
| 84 | 1 | 3684.567 | 9921.791³⁾ |
| 84 | 2 | 3685.269¹⁾ | - |
| 192 | 1 | 3688.001²⁾ | - |

¹⁾ Including 4 assembly screws

²⁾ Anodised


³⁾ with HP pattern printing

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories


Threaded inserts, packs of 1, order no. 3684.610
see page 144



COMPONENTS AND ACCESSORIES

HORIZONTAL RAILS HeiPac Vario

Horizontal rail Vario V-Ext. 2, with 10 mm extension and double screw fastening, front

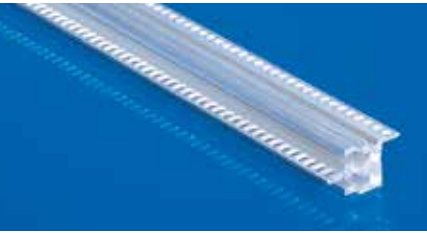

For type IV, IVs and VII injector/extractor handle

To accommodate guide rails and for the attachment of front panels. Double screw fastening and an extra high profile section ensure unique stability evens under extreme loads.


- Front projection 10 mm corresponding to IEE 1101.10 and IEC 60 297-3-102
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated




| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 3687.724 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1, order no. 3684.610
see page 144

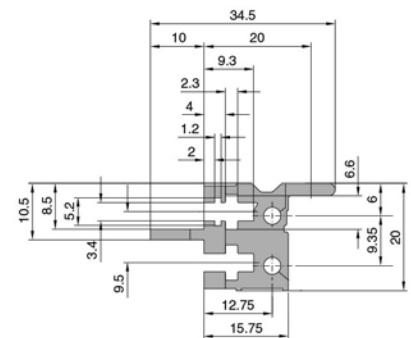

Horizontal rail Vario V-Ext. 3, with 10 mm extension and double screw fastening, front



For type IV, IVs and VII injector/extractor handle

To accommodate guide rails and for the attachment of front panels. The double screw fastening ensures a high level of stability even under extreme loads.


- Front projection 10 mm corresponding to IEE 1101.10 and IEC 60 297-3-102
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. unprinted | Order No. printed |
|-------------------|----------|---------------------|------------------------------|
| 84 | 1 | 9908.722 | 9921.795¹⁾ |


¹⁾ with HP pattern printing

+ Also required


Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1, order no. 3684.610
see page 144

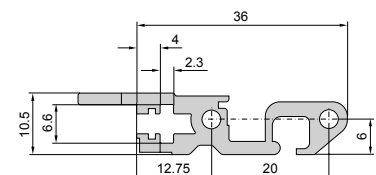

Horizontal rail Vario V-Ext. 4, with 10 mm extension and double screw fastening, front

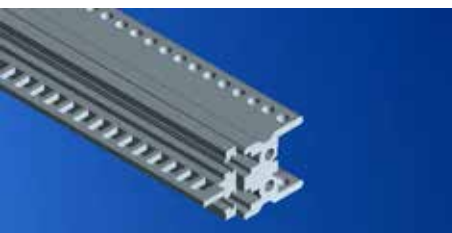

NEW

For type IV, IVs and VII injector/extractor handle

For subdivision i. e. 6 U in 2 x 3 U. To accommodate guide rails and for the attachment of front panels

- Front projection 10 mm corresponding to IEEE 1101.10 and IEC 60 297-3-102
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated


| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 3688.704 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1, order no. 3684.610
see page 144

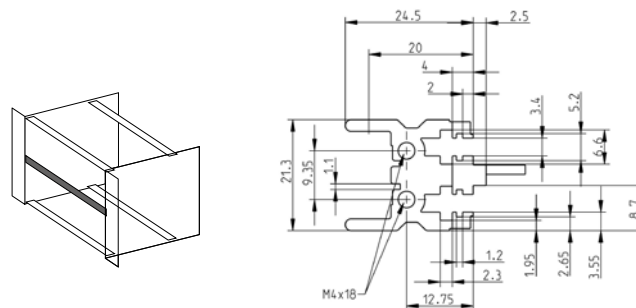

Horizontal rail Vario BP 1, for backplane



To accommodate guide rails and for the attachment of Z rails, insulating strips or conductive strips.

- Tapped holes M2.5 on a 1 HP pitch pattern for mounting backplanes and Z rails
- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- Applicable for top-mounting under covers
- Straight-through core hole
- Horizontal rail 192 HP without machining on the end faces. Suitable for cutting to length

Material

Extruded aluminium section

Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|------------------------------|
| 21 | 1 | 3685.991 |
| 40 | 1 | 3684.962 |
| 42 | 1 | 3684.570 |
| 63 | 1 | 3684.571 |
| 84 | 1 | 3684.572 |
| 84 | 2 | 3685.268¹⁾ |
| 192 | 1 | 3688.002²⁾ |

1) Including 4 assembly screws



2) Anodised

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Conductive strips
see page 145
Insulating strips
see page 145
Z rail
see page 144



COMPONENTS AND ACCESSORIES

HORIZONTAL RAILS HeiPac Vario

Horizontal rail Vario BP 2, for backplane



To accommodate guide rails and for the attachment of Z rails, insulating strips or conductive strips. The double screw fastening ensures a high level of stability even under extreme loads.

- HP pitch pattern of holes for the precise installation of guide rails
- M4 thread on end face
- For mounting backplanes/Z rails additional threaded inserts (9901.816) are required
- Straight-through core hole

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 9908.723 |

+ Also required


Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1, order no. 9901.816
see page 144



Horizontal rail Vario BP 3, for backplane

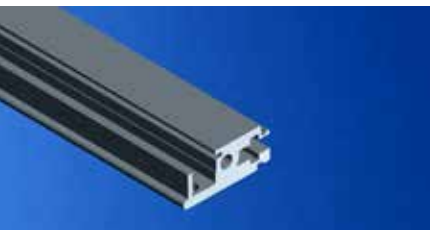

To accommodate guide rails and for the attachment of Z rails, insulating strips or conductive strips.

- HP pitch pattern of holes for the precise installation of guide rails
- Channel for slide-in covers
- Additional threaded inserts (3684.610) are required for mounting backplanes/Z rails
- M4 thread on end face
- Straight-through core hole
- Not suitable for mounting under covers

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 3688.104 |

+ Also required


Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Threaded inserts, packs of 1, order no. 3684.610
see page 144
Insulating strips
see page 145
Conductive strips
see page 145



Horizontal rail Vario BP 4, for conductive mounting of backplanes

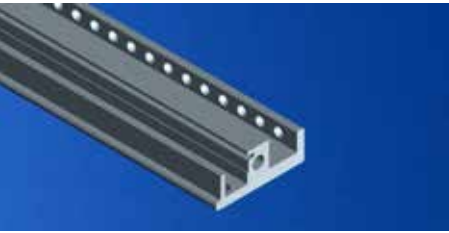

To accommodate guide rails and for the conductive attachment of backplanes

- HP pitch pattern of holes for the precise installation of guide rails
- Tapped holes M2.5 on a HP pitch pattern
- Channel for slide-in covers
- M4 thread on end face
- Straight-through core hole
- Not suitable for mounting under covers
- For mounting slide-in covers
- Due to integrated contact area, insulating strips cannot be used

Material

Extruded aluminium section



Surface finish

Clear-chromated


| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 9920.069 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202



Horizontal rail Vario BP 5, for conductive mounting of backplanes

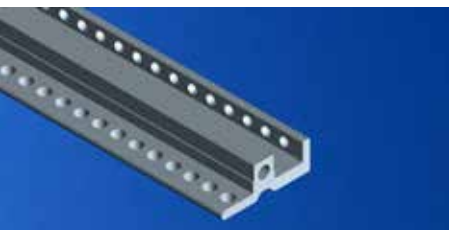

To accommodate guide rails and for the conductive mounting of backplanes

- Tapped holes M2.5 on a HP pitch pattern
- HP pitch pattern of holes for the precise installation of guide rails
- Due to integrated contact area, insulating strips cannot be used
- Applicable for top-mounting under covers
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section



Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 9912.522 |

+ Also required


Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202



COMPONENTS AND ACCESSORIES

HORIZONTAL RAILS HeiPac Vario

Horizontal rail Vario BP-M 1, for backplane, centre

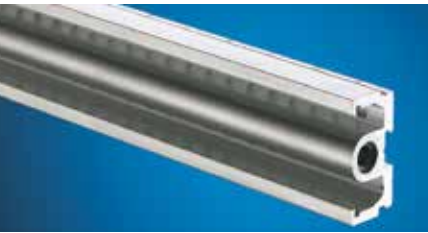

When using 6 U PCBs or box-type plug-in units. Facility for the attachment of Z rails, insulating strips or conductive strips.

- Tapped holes M2.5
- M4 thread on end face
- Straight-through core hole
- Horizontal rail 192 HP for cutting to the required length

Material

Extruded aluminium section

Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-------------------------------|
| 40 | 1 | 3684.963 |
| 42 | 1 | 3684.580 |
| 63 | 1 | 3684.581 |
| 84 | 1 | 3684.582 |
| 84 | 1 | 3685.270 ¹⁾ |
| 168 | 1 | 3684.579 |
| 192 | 1 | 3688.003 ²⁾ |

¹⁾ Including 2 assembly screws



²⁾ Anodised

+ Also required


Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

+ Accessories

Insulating strips, see page 145
Conductive strips, see page 145
Z rails, see page 144



Horizontal rail Vario BP-M 2, for backplane, centre

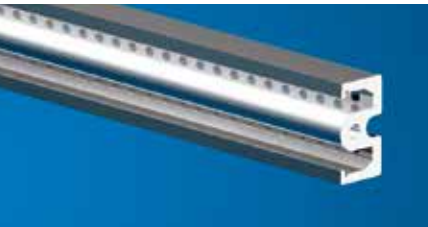

When using 6 U PCBs or box-type plug-in units. Facility for the attachment of Z rails or backplanes.

- Tapped holes M2.5
- M4 thread on end face
- Straight-through core hole
- Due to integrated contact area, insulating strips cannot be used



Material

Extruded aluminium section


Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 9912.523 |



Horizontal rail Vario CON 1, with integral Z rail for connector

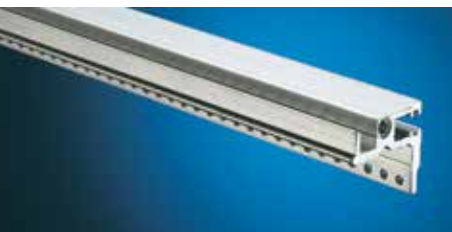

To accommodate guide rails. Integral Z rail for mounting connectors (CON) to IEC 60 603-2.

- HP pitch pattern of holes for the precise installation of guide rails
- Tapped holes M2.5 for connector mounting
- Applicable for top-mounting under covers
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section



Surface finish

Clear-chromated


| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 42 | 1 | 3686.191 |
| 63 | 1 | 3686.919 |
| 84 | 1 | 3686.159 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202



Horizontal rail Vario CON 2, with integral Z rail for connector

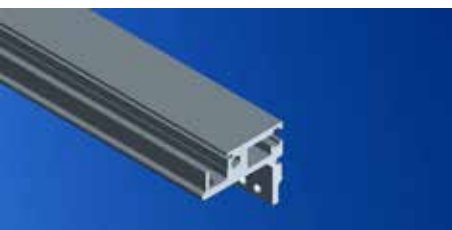

To accommodate guide rails. Integral Z rail for mounting connectors (CON) to DIN 41612

- HP pitch pattern of holes for the precise installation of guide rails
- 84 tapped holes M2.5 for connector mounting
- Not suitable for mounting under covers
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section



Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 9901.991 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202



COMPONENTS AND ACCESSORIES

HORIZONTAL RAILS HeiPac Vario

Horizontal rail Vario CON-M 1, with integral Z rail for connector, rear centre



When using 6 U PCBs or box-type plug-in units. Integral Z rail for mounting connectors (CON) to IEC 60 603-2

- Tapped holes M2.5
- M4 thread on end face
- Straight-through core hole

Material

Extruded aluminium section



Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 42 | 1 | 3687.600 |
| 63 | 1 | 3687.601 |
| 84 | 1 | 3687.602 |
| 168 | 1 | 3687.603 |

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202

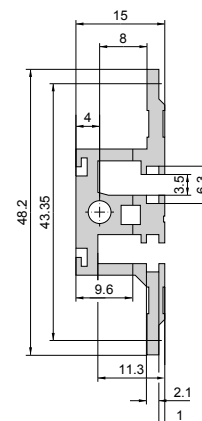

Adaptor rail, rear centre (E)



When subdividing 6 U into 2 x 3 U, the adaptor rail accommodates the guide rails when fastened to the centre horizontal rail.

- HP pitch pattern of holes for the precise installation of guide rails
- M4 and M2.5 thread on the end face
- Applicable in combination with BP-M 1, BP-M 2 and EST-M 1
- Straight-through core hole
- Horizontal rail 192 HP without machining on the end faces. Suitable for cutting to length

Material

Extruded aluminium section

Surface finish

Clear-chromated



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|------------------------------|
| 12 | 1 | 3684.587 |
| 16 | 1 | 3684.588 |
| 20 | 1 | 3684.589 |
| 40 | 1 | 3684.964 |
| 42 | 1 | 3684.590 |
| 63 | 1 | 3686.005 |
| 84 | 1 | 3684.591 |
| 84 | 1 | 3685.272¹⁾ |
| 168 | 1 | 3684.584 |
| 192 | 1 | 3688.004²⁾ |

¹⁾ Including 4 assembly screws



²⁾ Anodised

+ Also required

Assembly screws M4 x 12
Packs of 100, order no. 3654.300
see page 202



Overview horizontal rails HeiPac EASY

| Main sections | EASY V 1 Front horizontal rail, with double screw fastening | EASY BP 1 Rear horizontal rail, with double screw fastening, for mounting backplanes | EASY CON 1 Rear horizontal rail, with double screw fastening, with integral Z rail | EASY H 1 Rear horizontal rail, with double screw fastening, for mounting rear panels |
|--|---|--|--|--|
| | Page 142 | Page 142 | Page 143 | Page 143 |
| Additional sections |  |  |  |  |
| E Adaptor rail, rear centre, to accommodate guide rails  Page 140 | - | - | - | - |
| F Z rail for connector  Page 144 | - | - | - | - |
| G Insulating strip ¹⁾  Page 145 | - | - | - | - |
| H Conductive strip ²⁾  Page 145 | - | - | - | - |
| I Threaded insert  Page 144 |  | - |  |  |
| J Identification strips  Page 144 | - | - | - | - |
| K EMC gaskets, horizontal  Page 145 | - | - | - | - |

For ¹⁾insulated or ²⁾conductive attachment of backplanes.

COMPONENTS AND ACCESSORIES

HORIZONTAL RAILS HeiPac EASY

Horizontal rail EASY V 1, with double screw fastening, front



To accommodate guide rails and for the attachment of front panels

- Pre-assembled screws M 4x16 for fast mounting on the subrack side panel
- Front excess length 2.5 mm corresponding to IEC 60 297-3
- HP pitch pattern of holes for the precise installation of guide rails
- On request with double screw fastening to ensure a high stability
- M4 thread on end face
- Straight-through core hole for optional double screw fastening

Material

Extruded aluminium section

Surface finish

Non-corrosive

Supply includes



2 horizontal rails with pre-assembled threaded inserts and screws M4 x 16

| Usable width (HP) | Packs of | Order No. unprinted | Order No. printed |
|-------------------|----------|---------------------|------------------------|
| 84 | 2 | 3634.600 | 9921.803 ¹⁾ |

¹⁾ with HP pattern printing

+ Also required

Assembly screws M4 x 16 for double screw fastening, order no. 3634.430 (packs of 100)



1 Core hole M4

Horizontal rail EASY BP 1, with double screw fastening, for backplane



To accommodate guide rails and for the attachment of backplanes

- Pre-assembled screws M 4x16 for fast mounting on the subrack side panel
- Due to integrated contact area, insulating strips cannot be used
- Tapped holes M2.5 in 1 HP pitch pattern for mounting backplanes
- HP pitch pattern of holes for the precise installation of guide rails
- On request with double screw fastening to ensure a high stability
- M4 thread on end face
- Height of the profile allows cover extension
- Straight-through core hole for optional double screw fastening

Material

Extruded aluminium section

Surface finish

Non-corrosive



Supply includes

2 horizontal rails with pre-assembled threaded inserts and screws M4 x 16

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------|
| 84 | 2 | 3634.615 |


+ Also required

Assembly screws M4 x 16 for double screw fastening, order no. 3634.430 (packs of 100)

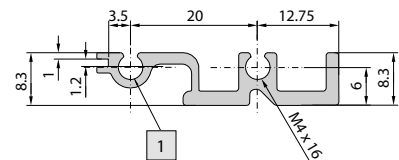

1 Core hole M4

Horizontal rail EASY CON 1, with integral Z rail for connector, with double screw fastening

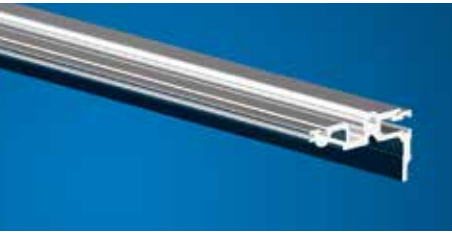

To accommodate guide rails, integral Z rail for the attachment of connectors (CON)

- Pre-assembled screws M 4x16 for fast mounting on the subrack side panel
- On request with double screw fastening to ensure a high stability
- HP pitch pattern of holes for precise mounting of guide rails
- M4 thread on end face
- Straight-through core hole for optional double screw fastening
- Height of the profile allows cover extension

Material

Extruded aluminium section

Surface finish

Non-corrosive

Supply includes

2 horizontal rails with pre-assembled screws M4 x 16



| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 2 | 3634.620 |

+ Also required

Threaded inserts, packs of 1, order no. 9901.816 see page 144

+ Also required

Assembly screws M4 x 16 for double screw fastening, order no. 3634.430 (packs of 100)

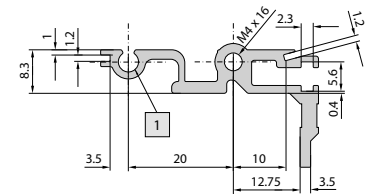

1 Core hole M4

Horizontal rail EASY H 1, with double screw fastening, for mounting rear panels



To accommodate rear front panels

- With channel for mounting top covers see page 164 Covers EASY version 2
- On request with double screw fastening to ensure a high stability
- Straight-through core hole for optional double screw fastening
- M4 thread on end face
- Pre-assembled screws M 4x16 for fast mounting on the subrack side panel

Material

Extruded aluminium section

Surface finish

Non-corrosive


Supply includes

2 horizontal rails with threaded inserts and screws M4 x 16

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 3634.510 |

+ Also required

Assembly screws M4 x 16 for double screw fastening, order no. 3634.430 (packs of 100)

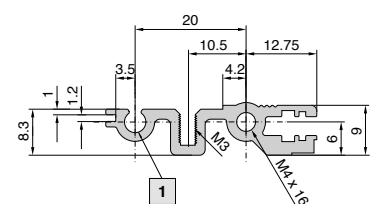

1 Core hole M4

COMPONENTS AND ACCESSORIES

ACCESSORIES FOR HORIZONTAL RAILS

Z rail (F) for connector, IEC 60 603-2



With M2.5 threaded holes

Material

Extruded aluminium section


Surface finish

Clear-chromated

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 4 | 1 | 3684.597 |
| 8 | 1 | 3684.598 |
| 20 | 1 | 3684.599 |
| 40 | 1 | 3684.965 |
| 42 | 1 | 3684.600 |
| 63 | 1 | 3684.601 |
| 84 | 1 | 3684.602 |
| 84 | 2 | 3685.271 |

+ Also required

Assembly screws M2.5 x 6,
Packs of 100, order no. 3654.340,
see page 202



Threaded insert (I)



With M2.5 threaded holes on an HP pitch pattern. For sliding into the horizontal rail. There are two threaded insert versions, which are distinguished by their height.

Material

Sheet steel, zinc-plated

| Usable width (HP) | Packs of | Order No. | |
|-------------------|----------|----------------------|-----------------|
| | | 6 x 2 mm | 5 x 2 mm |
| | | for horizontal rails | |
| | | Type | Type |
| | | V 1, V 2 | EASY V 1 |
| | | V-Ext. 1 | EASY EST 1 |
| | | V-Ext. 2 | EASY BP 1 |
| | | V-Ext. 3 | EASY H 1 |
| | | EST 1 | |
| 3 | 1 | 3684.603 | - |
| 7 | 1 | 3684.604 | - |
| 12 | 1 | 3684.605 | - |
| 16 | 1 | 3684.606 | - |
| 20 | 1 | 3684.607 | - |
| 21 | 1 | 3686.149 | - |
| 40 | 1 | 3684.966 | - |
| 42 | 1 | 3684.608 | - |
| 63 | 1 | 3684.609 | - |
| 84 | 1 | 3684.610 | 9901.816 |

Identification strip (J)



To identify the slots on the subrack, self-adhesive.
The following versions are available:

4 mm wide:

- for front horizontal rails
- for rear horizontal rails


2 mm wide:

- for front horizontal rails (channel on front face)

| For horizontal rail | Width mm | Label | Packs of | Order No. |
|---------------------|----------|-----------|----------|-----------------|
| Front | 4 | 1 ... 83 | 1 | 3687.575 |
| Rear | 4 | 1 ... 167 | 1 | 3687.577 |
| Front | 4 | 83 ... 1 | 1 | 3687.574 |
| Front | 2 | 1 ... 84 | 1 | 3687.576 |

COMPONENTS AND ACCESSORIES ACCESSORIES FOR HORIZONTAL RAILS

EMC gaskets (K) for front horizontal rails



For horizontal EMC protection.
For snapfastening onto the front horizontal rails.

Material

Stainless steel

European patent
no. 0 937 375 with validity
for DE

US patent no. 6,137,052

Chinese patent
no. ZL 97 1 98582.0

EMC

| Usable width (HP) | Packs of | Order No. |
|--|----------|-----------------|
| For top/bottom horizontal rail | | |
| 40 | 1 | 3684.974 |
| 40 | 10 | 9921.945 |
| 84 | 1 | 3684.808 |
| 84 | 10 | 3684.246 |
| For sub-division of 6 U into 2 x 3 U, between 2 horizontal rails | | |
| 84 | 1 | 3685.789 |
| 84 | 10 | 3685.229 |



Conductive strip (H)




For conductive mounting of backplanes.

- 84 HP
- Slides onto the rear horizontal rail

Material

Aluminium

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 1 | 3684.612 |
| 84 | 2 | 3685.273 |



Insulating strip (G)




For insulated mounting of backplanes

- 21 HP
- Slides onto the rear horizontal rail

Material

Plastic, self-extinguishing to UL 94-V0

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 21 | 1 | 3684.611 |
| 21 | 8 | 3685.274 |




Punched strip



Material

Aluminium

| Usable width (HP) | Packs of | Order No. |
|-------------------|----------|-----------------|
| 84 | 2 | 3685.275 |



COMPONENTS AND ACCESSORIES

COMPONENTS FOR EMC INSTALLATION

EMC gaskets, vertical



To ensure EMC protection between the subrack side panel and the front/rear panels. There are two versions available.

Suitable for mounting on:

- 482.6 mm (19") flanges for subracks
- Corner trims, rear
- EMC contact strip
- U-channel front panels
- Trim panels for HeiPac Vario-Module
- Flanges for HeiPac Vario-Module

Material

Stainless steel

German patent
no. 101 15 525 and
no. 198 46 627
US patent no. 6,500,012
US patent no. 7,044,753

EMC

Version 1: Segmented

| U | Order No. Packs of 1 | Order No. Packs of 10 |
|----|-------------------------|--------------------------|
| 1 | 3686.973 | 3684.236 |
| 2 | 3686.974 | 3684.237 |
| 3 | 3686.975 | 3684.238 |
| 4 | 3686.976 | 3684.239 |
| 6 | 3686.977 | 3684.240 |
| 7 | 3686.978 | 3684.241 |
| 9 | 3686.979 | 3684.242 |
| 10 | 3686.980 | 3684.243 |
| 11 | 3686.981 | 3684.244 |

Version 2: One-piece

| U | Order No. Packs of 1 | Order No. Packs of 10 |
|----|-------------------------|--------------------------|
| 2 | 3688.610 | - |
| 3 | 3688.611 | 9921.942 |
| 4 | 3688.612 | - |
| 5 | 3688.613 | - |
| 6 | 3688.614 | 9921.943 |
| 7 | 3688.615 | - |
| 8 | 3688.634 | - |
| 9 | 3688.616 | 9921.944 |
| 10 | 3688.609 | - |
| 11 | 3688.633 | - |
| 12 | 3688.606 | - |



EMC contact strip



To ensure EMC protection when horizontal rails are set-back. Integral channel to accommodate EMC gaskets.

Material

Extruded aluminium section

Surface finish

Clear-chromated


Note

2 sections are required for each subrack.

| U | Packs of | Order No. |
|---|----------|-----------------|
| 3 | 1 | 3684.643 |
| 6 | 1 | 3684.644 |
| 9 | 1 | 3684.645 |

+ Also required

EMC gaskets, vertical, see page 146
Assembly screws M3 x 6, packs of 100,
order no. 3684.233, see page 202



EMC gaskets for covers




For EMC shielding between the horizontal rails and covers.


Material
Stainless steel

| HP | Packs of | Order No. |
|----|----------|-----------------|
| 40 | 1 | 3684.975 |
| 84 | 1 | 3684.807 |
| 84 | 10 | 3684.245 |

EMC

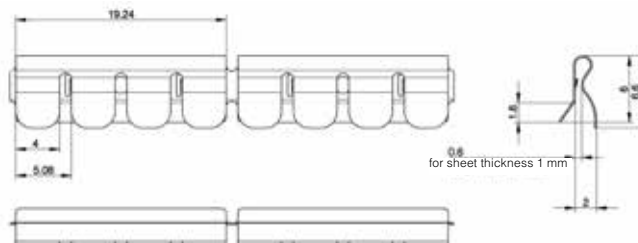

EMC gaskets for front horizontal rails



For horizontal EMC protection.
For snapfastening onto the front horizontal rails.

Material
Stainless steel

European patent
no. 0 937 375 with validity
for DE
US patent no. 6,137,052
Chinese patent
no. ZL 97 1 98582.0

| Usable width (HP) | Packs of | Order No. |
|--|----------|-----------------|
| For top/bottom horizontal rail | | |
| 40 | 1 | 3684.974 |
| 40 | 10 | 9921.945 |
| 84 | 1 | 3684.808 |
| 84 | 10 | 3684.246 |
| For sub-division of 6 U into 2 x 3 U, between 2 horizontal rails | | |
| 84 | 1 | 3685.789 |
| 84 | 10 | 3685.229 |

EMC



COMPONENTS AND ACCESSORIES

MOUNTING COVERS/COMPONENTS FOR EMC INSTALLATION

Mounting blocks for cover plates



For mounting covers, versions 1 – 4, on the subrack side panel.

Material

Die-cast zinc

Surface finish

Nickel-plated

Note

For EMC applications, mounting blocks must be fitted across the entire subrack depth. The table here shows the number of mounting blocks required to install 1 cover plate with EMC shielding.


| | Packs of | Order No. |
|---------------------------------|----------|-----------------|
| Mounting blocks 28.5 mm long | 10 | 3684.234 |

| Number of mounting blocks for max. EMC protection | Cover plate depth mm |
|---|----------------------|
| 4 | 142 |
| 8 | 192 |
| 10 | 212 |
| 12 | 252 |
| 14 | 272 |
| 16 | 312 |
| 18 | 332 |
| 20 | 372 |
| 24 | 432 |
| 28 | 492 |
| 32 | 552 |


EMC

+ Also required

Assembly screws M3 x 6, packs of 100, order no. 3684.233, see page 202

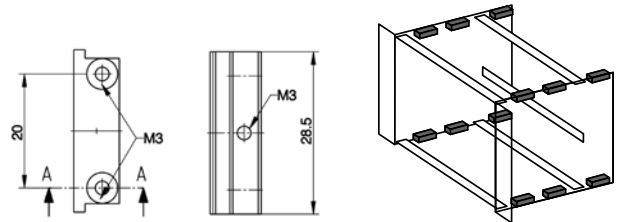

Mounting clips for cover plates

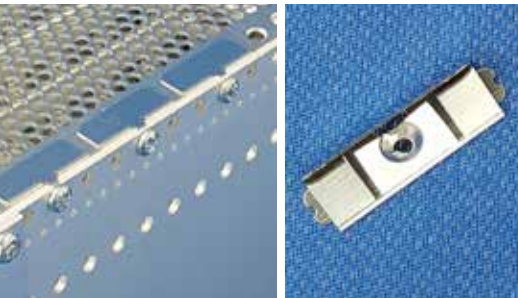

For mounting covers on the subrack side panel

Compatible with cover plate versions 1-4 and the ECO and EASY versions, and with sheet metal blanks 0.8-1.0 mm thick. For EMC applications, mounting clips must be fitted across the full depth of the subrack.

Material



Stainless steel

| Length mm | n | Packs of | Order No. |
|-----------|---|----------|-----------------|
| 30 | 1 | 1 | 3688.109 |
| 90 | 3 | 1 | 9921.722 |
| 120 | 4 | 1 | 9921.883 |
| 150 | 5 | 1 | 9921.723 |
| 180 | 6 | 1 | 9921.884 |
| 210 | 7 | 1 | 9921.724 |
| 240 | 8 | 1 | 9921.885 |

+ Also required


Assembly screws, order no. 9921.879

NEW

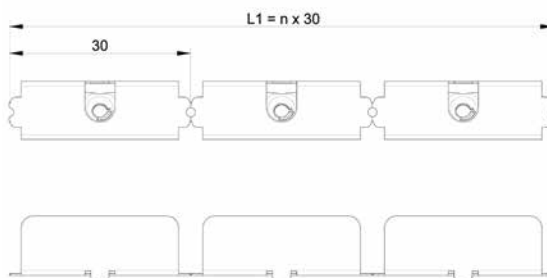

EMC

Back cover

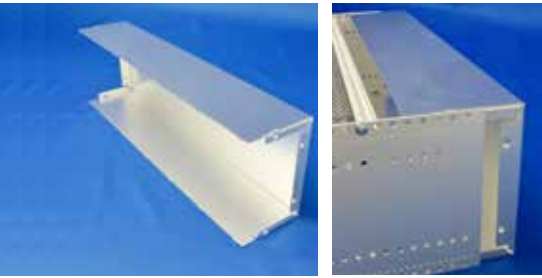

For HeiPac Vario

Ensures cover for back of subrack

Material

Aluminium

Surface finish

Clear-chromated

Note


The side panel depth required is obtained by taking the length of the plug-in units used, and adding 85 mm (refer to table). A precondition is the use of a horizontal rail that allows room for additional construction.

NEW

| U | Packs of | Order No. |
|---|----------|-----------------|
| 3 | 1 | 9921.685 |
| 6 | 1 | 9921.710 |

| PCB depth mm | Side panel depth mm |
|--------------|---------------------|
| 160 | 245 |
| 220 | 305 |
| 280 | 365 |

Horizontal rail that allows room for additional construction

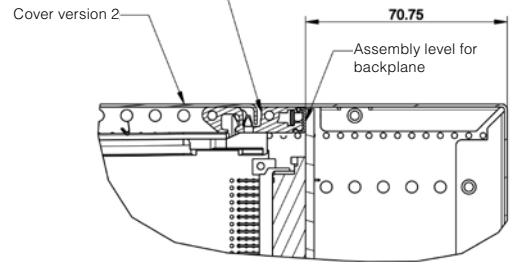

COMPONENTS AND ACCESSORIES

MOUNTING KITS

Vertical divider kit



For the combined installation of single and double Eurocards in 6 U and 9 U subracks.

Material

Aluminium, clear-chromated

Supply includes

2 front horizontal rails
1 adaptor rail
2 threaded inserts
1 vertical support (from 12 HP)
assembly parts

6 U (2 x 3 U)

| HP | HP | Order No. |
|--------------------|----------------|-----------------|
| 1 (2 x 3 U) | 2 (6 U) | |
| 14 | 68 | 3684.220 |
| 21 | 61 | 3684.221 |
| 28 | 54 | 3684.222 |
| 40 | 42 | 3684.223 |
| 42 | 40 | 3684.224 |

9 U (1 x 6 U + 1 x 3 U)

| HP | HP | Order No. |
|-------------------|-------|-----------------|
| (1 x 6 + 1 x 3 U) | (9 U) | |
| 4 | 80 | 3684.225 |
| 8 | 76 | 3684.226 |
| 12 | 70 | 3684.227 |
| 16 | 66 | 3684.228 |
| 20 | 62 | 3684.229 |

+ Accessories

Front panel, see page 150

EMC gaskets, horizontal, see page 147

Vertical support



Required for the combined installation of single, double and triple Eurocards in one subrack.

Material

Aluminium, extruded

Surface finish

Clear-chromated

| U | Packs of | Order No. |
|---|----------|-----------------|
| 6 | 1 | 3684.678 |
| 9 | 1 | 3684.679 |

Front panel to conceal the vertical support of the vertical divider kit



To conceal the vertical support of the vertical divider kit.

Material

Aluminium, extruded


Supply includes

Assembly parts

EMC version,
see page 179

| U | HP | Packs of | Order No. |
|---|----|----------|-----------------|
| 6 | 2 | 1 | 3685.176 |
| 9 | 2 | 1 | 3685.286 |

Horizontal mounting kit

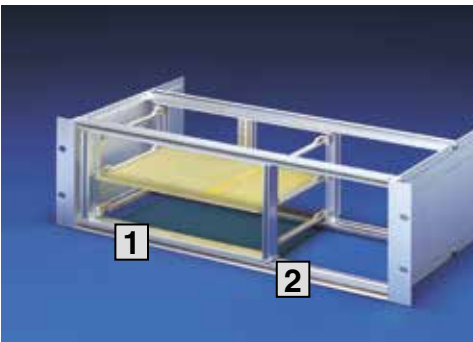

Für den horizontalen Einbau von 6 HE/9 HE Leiterplatten in 3 HE/4 HE Baugruppenträgern

- 1** Horizontal installation space:
3 U subrack: 20 HP (5 slots)
4 U subrack: 28 HP (7 slots)
- 2** Vertical installation space:
(when installing double Eurocards)
31 HP (without trim frame)
28 HP (with trim frame)

Material

Aluminium, clear-chromated

Supply includes

2 horizontal rails, front
2 horizontal rails, rear
1 or 2 horizontal rails, rear, centre
2 threaded inserts
4 or 6 insulating strips
4 connecting parts
assembly parts

For backplane assembly with standard horizontal rail, front

| U horizontal | Order No. | |
|--------------|-----------------|-----------------|
| | for 3 U subrack | for 4 U subrack |
| 6 | 3684.206 | 3684.208 |
| 9 | 3684.207 | 3684.209 |


For backplane assembly, front horizontal rail with 10 mm extension

| U horizontal | Order No. | |
|--------------|-----------------|-----------------|
| | for 3 U subrack | for 4 U subrack |
| 6 | 3684.210 | 3684.212 |
| 9 | 3684.211 | 3684.213 |

+ Accessories

Trim frame, see page 151

Trim frame for horizontal mounting kit

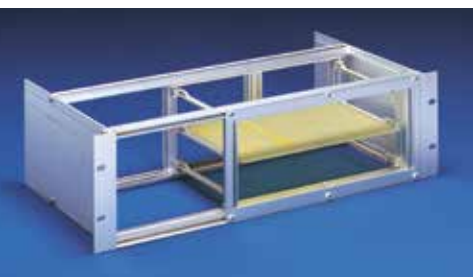

To conceal the front sections of the horizontal mounting kit.

Material

Aluminium, anodised

| U horizontal | HP | Order No. | |
|--------------|----|-----------------|-----------------|
| | | for 3 U subrack | for 4 U subrack |
| 6 | 56 | 3685.783 | 3685.785 |
| 9 | 84 | 3685.784 | 3685.786 |

+ Also required

Collar screws and plastic collars, packs of 100 sets, order no. 3658.160, see page 202

Trim frame for horizontal mounting kit, vented



To conceal the front sections of the horizontal mounting kit.

Material

Aluminium

Surface finish

Anodised, clear-chromated (EMC version)

Supply includes

EMC accessories (with EMC version).

| U horizontal | HP | Order No. | |
|--------------|----|-----------------|-----------------|
| | | for 3 U subrack | for 4 U subrack |
| 6 | 63 | 3685.787 | 3685.788 |

+ Also required

Collar screws and plastic collars, packs of 100 sets, order no. 3658.160, see page 202

EMC version

| U horizontal | HP | Order No. | |
|--------------|----|-----------------|-----------------|
| | | for 3 U subrack | for 4 U subrack |
| 6 | 63 | 3685.291 | 3685.292 |


+ Also required

Centering screws, packs of 100, order no. 3687.050, see page 203

COMPONENTS AND ACCESSORIES

TOP-HAT RAIL MOUNTING

Fixing for HeiPac top-hat rail version 1

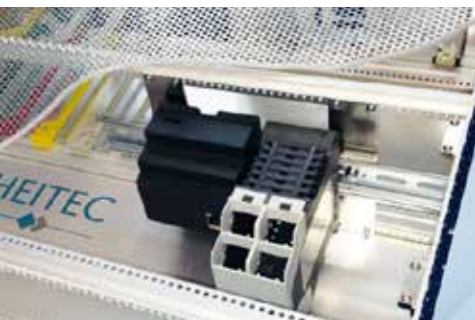

NEW

Rail holder to mount a top-hat rail on the horizontal subrack rails


Material

Rail holder: Aluminium, not surface-coated
 Top-hat rail: steel, zinc-plated

Supply includes

2 rail holders
 1 top-hat rail, perforated
 Assembly parts

| Height | HS | L1 | L2 | Packs of | Order No. |
|--------|----|-----|-----|----------|----------------|
| 3 U | 35 | 100 | 7.5 | 1 | 9918814 |
| 3 U | 35 | 200 | 7.5 | 1 | 9918815 |
| 3 U | 35 | 300 | 7.5 | 1 | 9918816 |
| 3 U | 35 | 400 | 7.5 | 1 | 9918817 |
| 3 U | 35 | 100 | 15 | 1 | 9918818 |
| 3 U | 35 | 200 | 15 | 1 | 9918819 |
| 3 U | 35 | 300 | 15 | 1 | 9918820 |
| 3 U | 35 | 400 | 15 | 1 | 9918821 |

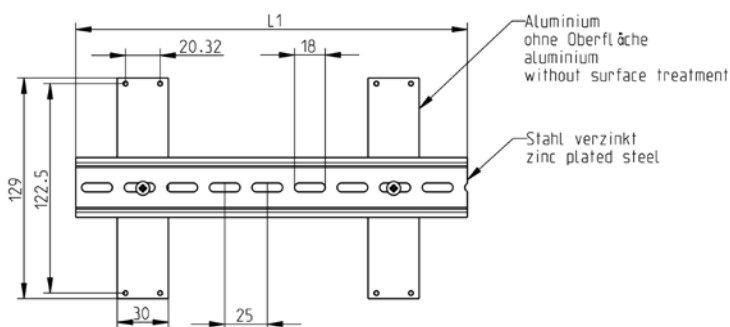

Fixing for HeiPac top-hat rail version 2



NEW

Fixing bracket to mount a top-hat rail on the subrack side panel

Material

Fixing bracket: steel plate, zinc-plated


Supply includes

2 fixing brackets
 Assembly parts

| Packs of | Order No. |
|----------|-----------------|
| 1 set | 3634.770 |

+ Also required

Top-hat rail, packs of 1, see page 153

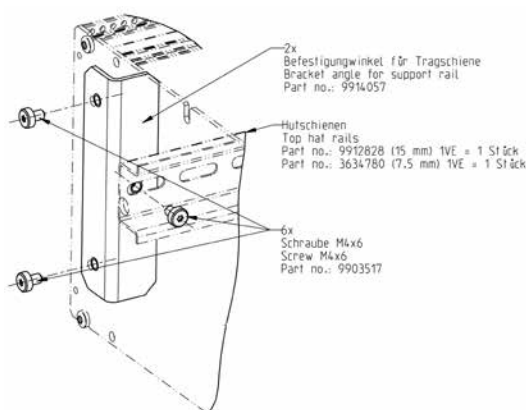

Top-hat rail adapter



NEW

Top-hat rail adapter to directly mount a component or device on a top-hat rail


Material

Extruded aluminium section

| Packs of | Order No. |
|----------|-----------------|
| 1 | 3687.739 |

+ Also required

Assembly screws ,packs of 100
Order no. 3606.550
see page 202

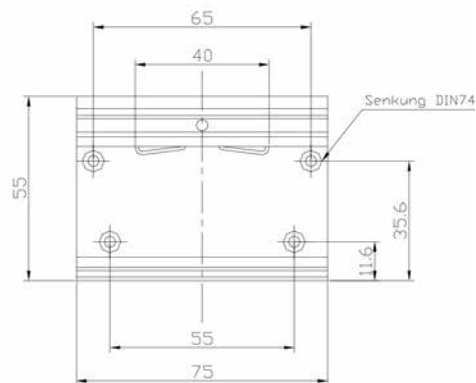

Top-hat rail



NEW

Material

Steel

Surface finish


Zinc-plated

| For Width | Dimensions mm | Packs of | Order No. |
|-----------|----------------|----------|-----------------|
| 84 HP | 35 x 7.5 x 425 | 1 | 3634.780 |
| 84 HP | 35 x 15 x 425 | 1 | 9912.828 |

COMPONENTS AND ACCESSORIES

GUIDE RAILS

Guide rails, plastic

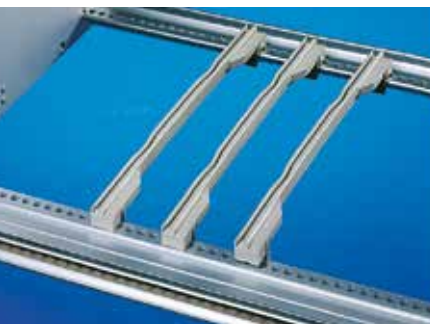

For 160, 220 and 280 mm PCBs up to 2 mm nominal thickness.

2 versions are available:

- Snap-in fastening and screw-fastening
- Snap-in fastening

Material


Polycarbonate
Base material to UL 94-V0

| For PCB depth mm | Packs of | Order No. | |
|------------------|----------|---|-------------------|
| | | Snap-in fastening/ screw-fastening ¹⁾ | Snap-in fastening |
| 100 | 1 | - | 3688.005 |
| 160 | 1 | 3684.657 | 3684.654 |
| 220 | 1 | 3684.658 | 3684.655 |
| 280 | 1 | 3684.659 | 3684.656 |

+ Also required

¹⁾ Assembly screws
packs of 100, order no. 3654.360
see page 202

Guide rails for contact spring fitting, plastic

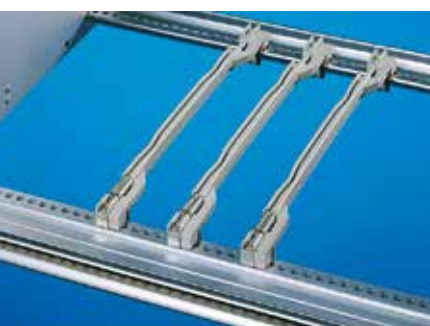

For 160, 220 and 280 mm PCBs up to 2 mm nominal thickness. By installing contact springs, an electrical connection can be made between the PCB and the assembly.

Material

Polycarbonate
Base material to UL 94-V0

| For PCB depth mm | Packs of | Order No. | |
|------------------|----------|-----------------|---|
| | | 160 | 1 |
| 220 | 1 | 3684.661 | |
| 280 | 1 | 3684.662 | |

+ Also required

Contact springs, order no. 3687.726
see page 154

Contact springs




For electrical connection between the PCB and the subrack, or to discharge static charges from the PCB.

Suitable for installation in "guide rails for contact spring fitting" and "end pieces for guide rails".

| Packs of | Order No. |
|----------|-----------------|
| 10 | 3687.726 |

Guide rails, Aluminium

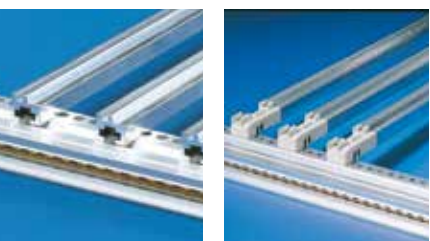

1

2

For high loads. Suitable for nominal PCB thicknesses of 1.6 mm. A distinction is made between guide rails for and without end pieces.

The guide rails without end pieces are screwfastened directly into the horizontal rail.

Material

Aluminium

| For PCB depth mm | Packs of | Order No. | |
|------------------|----------|--------------------------------------|---------------------|
| | | 1 Without end piece ¹⁾ | 2 For end pieces |
| 160 | 1 | 3687.526 | 3684.663 |
| 220 | 1 | 3687.527 | 3684.664 |
| 280 | 1 | 3687.528 | 3684.665 |
| 1000 | 1 | 3684.666 | - |

+ Also required

¹⁾ Screw M2.5 x 6, packs of 100, order no. 3654.340,
see page 202
¹⁾ Nut M2.5, packs of 100, order no. 3654.370,
see page 202
¹⁾ Retaining cage M2.5, packs of 100, order no. 9901.417,
see page 202

End pieces for guide rails, aluminium



Mounting contact springs ensures an electrical connection between the PCB and the subrack.

Material

Polycarbonate
Base material UL 94-V1

| | Packs of | Order No. |
|------------------|----------|-----------------|
| End piece, front | 1 | 3684.668 |
| End piece, rear | 1 | 3685.759 |

+ Also required

Contact springs, order no. 3687.726
see page 154

Keyable guide rails 4 HP, plastic



Guide rails 4 HP, keyable, to IEEE 1101.10.

- For 1.6 – 2.0 mm nominal thickness
- Chambers for the installation of keys
- Option of installing ESD contacts to discharge static charges
- Narrow design for maximum air flow
- Various colour variants to identify the slots:
 - Red for system slot
 - Green for power supply
 - Yellow and grey for board-type plug-in units


- 1** ESD contact for guide rails
- 2** ESD contact for front panel
- 3** Keys

Material

Polycarbonate
Base material to UL 94-V0

Note

Only for use in conjunction with type IV, IVs, VII injector/extractor handles.



| For PCB depth mm | Packs of | Order No. | | | |
|------------------|----------|-----------------|-----------------|-----------------|-----------------|
| | | Grey | Red | Green | Yellow |
| 160 | 10 | 3685.257 | - | - | - |
| 220 | 10 | 3685.258 | - | - | - |
| 280 | 10 | 3685.259 | - | - | - |
| 160 | 1 | 3684.669 | 3686.063 | 3688.055 | 3689.089 |
| 220 | 1 | 3684.953 | 9902.240 | - | 3689.091 |
| 280 | 1 | 3684.954 | - | - | 3689.093 |

+ Accessories

Keys, see page 159
ESD contact, see page 159
Extractor handles type IV, IVs, VII, see page 168 ff.

COMPONENTS AND ACCESSORIES

GUIDE RAILS

Keyable guide rails with 1/2 HP offset



Guide rails with 1/2 HP offset for use in telecom applications. This allows PCBs to be populated on both sides. Green guide rails with offset are prescribed in the CompactPCI specification (PICMG 2.11) for the installation of power supply units.

- For 1.6 – 2.0 mm PCB thickness
- 4 HP x 160/220 mm
- Narrow design for maximum air flow
- Chambers for the installation of keys
- Option of installing ESD contacts to discharge static charges

Material

Polycarbonate
Base material to UL 94-V0

Note

Only suitable for use in conjunction with extractor handles type IV, IVs, VII with 1/2 HP offset.

| For PCB depth mm | Packs of | Colour | Order No. |
|------------------|----------|--------|-----------------|
| 160 | 1 | Grey | 3686.137 |
| | 1 | Yellow | 3689.090 |
| | 1 | Green | 3687.832 |
| 220 | 1 | Grey | 3686.136 |
| | 1 | Yellow | 3689.092 |

+ Accessories

Keys
see page 159
ESD contact
see page 159
Extractor handles Type IVs, VII with 1/2 HP offset
see page 169

Keyable guide rails for rear I/O assemblies



Guide rails 4 HP, keyable to IEEE 1101.10 Prepared to accommodate a ground contact for assembly of a plug-type connection.

- For 1.6 – 2.0 mm nominal thickness
- For 80 mm deep PCBs
- Chambers for the installation of keys
- Option of installing ESD contacts to discharge static charges
- Narrow design for maximum air flow
- For CPCI or VME applications

Material

Polycarbonate
Base material to UL 94-V0

Note

- Only for use in conjunction with type IV, IVs, VII injector/extractor handles.
- Not suitable for horizontal rails with double screw-fastening

| Colour | For PCB depth mm | Packs of | Order No. | |
|--------|------------------|----------|-----------------|-----------------|
| | | | Top | Bottom |
| Grey | 80 | 1 | 3687.936 | 3687.937 |
| Yellow | 80 | 1 | 3689.097 | 3689.098 |

+ Accessories

Keys
see page 159
ESD contact
see page 159
Extractor handles type IV, IVs, VII
see page 168 ff.

Ground contact



Ensures a plug-in ground connection. UL-approved.

Material

Die-cast zinc

Supply includes

Grounding bush and contact spring

Note

Only suitable for use in conjunction with keyable guide rails for I/O assemblies.

| | Order No. | |
|-----------------------------------|-----------------|-----------------|
| | 1 set | 50 sets |
| Grounding bush and contact spring | 3689.036 | 3687.951 |

+ Also required

Assembly screws 3.5 x 12 mm, packs of 50, order no. 3684.109, see page 202



Keyable guide rails, aluminium, three-part



Keyable guide rails with aluminium centre part, for high mechanical loads. Suitable for 1.6 – 2.0 mm PCB thickness.

The guide rails are compiled from the following individual components:

- 1** 2 end pieces
- 2** 1 aluminium centre part
- 3** Insulating centre part(s)



1 End pieces

For three-part guide rails

For 1.6 – 2.0 mm PCB thickness

Material

Polycarbonate
Base material to UL 94-V0

Note

A front and a rear end piece is required for each guide rail.

| | Packs of | Order No. |
|-----------------|----------|-----------------|
| | 10 pairs | 3685.265 |
| Front end piece | 1 | 3685.790 |
| Rear end piece | 1 | 3684.670 |



2 Aluminium centre part

For three-part guide rails

For 1.6 – 2.0 mm PCB thickness

Material

Aluminium, unplated

| For PCB depth mm | Order No. | |
|------------------|-----------------|-----------------|
| | Packs of 1 | Packs of 10 |
| 220 | 3684.673 | 3685.260 |
| 280 | 3684.674 | 3685.261 |
| 340 | 3684.675 | 3685.262 |
| 400 | 3684.676 | 3685.263 |
| 1000 | 3684.672 | - |



3 Insulated centre part

For three-part guide rails

The insulating centre part is pushed onto the aluminium centre piece. Length: 60 mm

Material

Plastic, self-extinguishing to UL 94-V0

| Packs of | Order No. |
|----------|-----------------|
| 1 | 3684.677 |
| 10 | 3685.264 |

| For PCB depth mm | Number of insulating strips required |
|------------------|--------------------------------------|
| 220 | 2 |
| 280 | 3 |
| 340 | 4 |
| 400 | 5 |

COMPONENTS AND ACCESSORIES

GUIDE RAILS

Guide rails for 4.4" drive modules



Snap-fastening guide rails to accommodate PCBs and assemblies with a height of 4.4" (111.76 mm)


Material

Polycarbonate
Base material to UL 94-V0

Colour

RAL 7032 (Grey)

| For PCB depth mm | Packs of | Order No. |
|------------------|----------|-----------|
| 160 | 1 | 9919.834 |

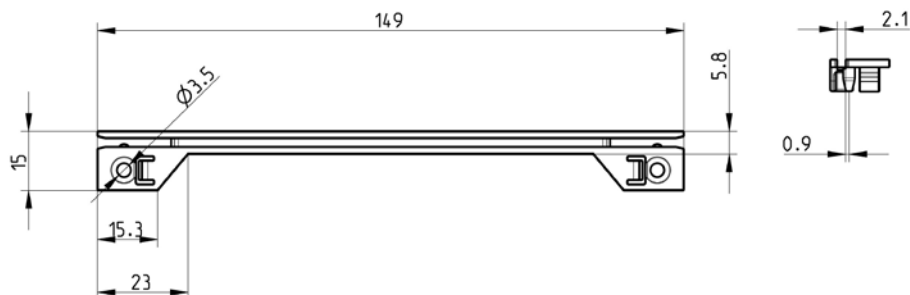

Guide rails for box type plug-in units



For PCB thickness 1.6 mm.
For insertion into covers with vent slots
(from 12 HP)
see page 184

Material

Noryl

| For PCB depth mm | Packs of | Order No. |
|------------------|----------|-----------|
| 160 | 10 | 3606.140 |
| 220 | 10 | 3606.200 |

Air block panel for slots



To conceal unused slots and prevent unwanted airflow. The air block panel simply snaps into position on the guide rails.

Material

Polycarbonate
Self-extinguishing to UL 94-V0


Colour

Blue



Note

Can only be used in conjunction with keyable guide rails 4 HP/160 mm
Not suitable for use in conjunction with guide rails with 1/2 HP offset.

| For keyable guide rail mm | Packs of | Order No. |
|---------------------------|----------|-----------|
| 160 | 1 | 3687.924 |

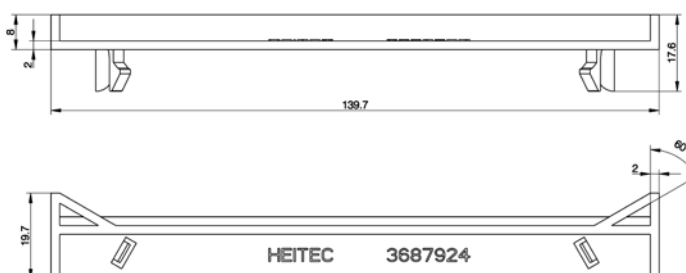

ESD contacts

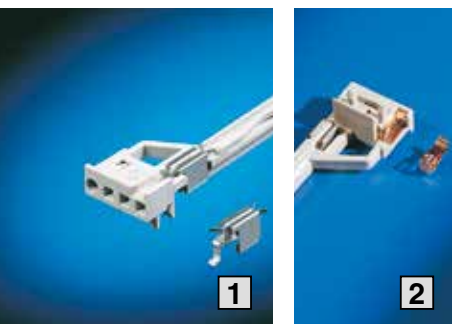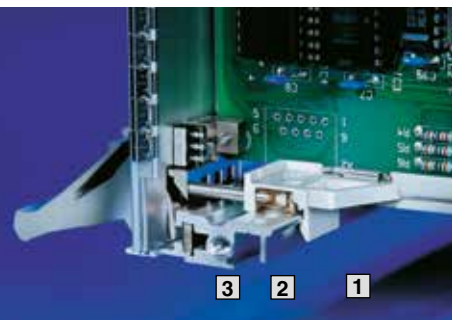

For installation in keyable guide rails

To discharge static charges

- 1 ESD contact in the guide rail**
For permanent direct discharge from the PCB.
- 2 ESD contact for front panel**
To discharge static charges in conjunction with the ESD pin. For insertion into the end piece of the guide rail.

3 ESD pin

4 Keys


Material

- 1** Stainless steel
- 2** Tin bronze, tin-plated

Note

Only for use in conjunction with extractor handle with ESD pin (type IV, IVs, VII), see page 168 ff.

| ESD clip for | Packs of | Order No. |
|--------------|----------|-----------------|
| Guide rail | 50 | 3684.204 |
| Front panel | 50 | 3684.205 |



Keys



Keys are used for coding of board-type plug-in units and prevent the use of assemblies in incorrect slots. The keys are inserted into the chambers of the keyable guide rails and the injector/extractor handles, types IV, IVs and VII (4 positions are possible). This produces 64 keying combinations per guide rail.

When keying the top and bottom guide rail, 4096 potential combinations are possible.

Standards

IEEE 1101.10, IEC 60 297-5-104



Material

Plastic
PBTP
Base material to UL 94-V0

| Colour | Packs of | Order No. |
|--------|----------|-----------------|
| Grey | 100 | 3684.325 |
| Red | 100 | 3684.326 |

+ Accessories


Keying tool
see page 160

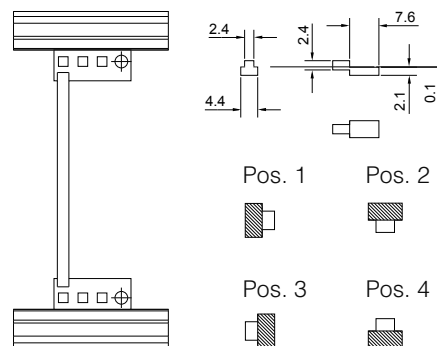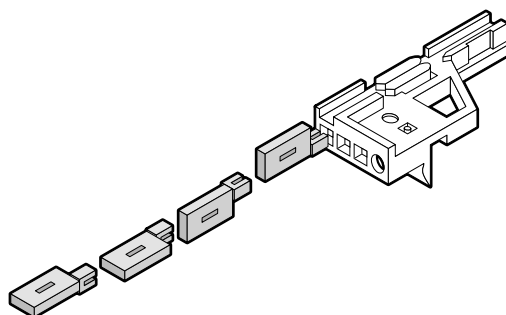

COMPONENTS AND ACCESSORIES

ACCESSORIES FOR KEYABLE GUIDE RAILS

PCB ejector/retainer

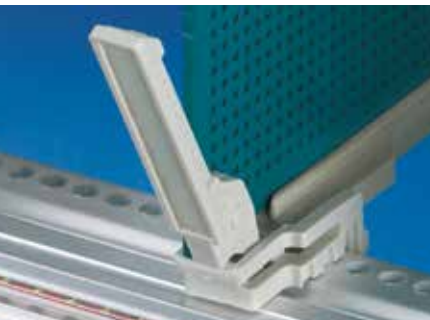

The two-piece PCB ejector is used for securing and extracting PCBs without front panels. The base section may also be used separately for board retention only.


Material

Polycarbonate
Base material to UL 94-V0

Note

Only suitable for guide rails 2 HP

| | Packs of | Order No. |
|------------------------|----------|-----------|
| 1 PCB ejector/retainer | 10 | 3687.014 |
| 2 PCB retainer | 10 | 3687.052 |

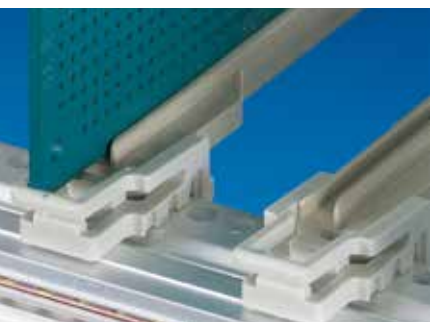

Keying tool



For simple assembly of keys. Up to 3 coding keys may be fitted simultaneously. An integral alignment pin makes positioning easier.

Material

Polycarbonate
Base material to UL 94-V0

| Packs of | Order No. |
|----------|-----------|
| 1 | 3687.956 |

Covers version 1



For all HeiPac Vario subracks

To cover the overall-subrack depth
(EMC application) or as connector protection

- Flat design for top and bottom
- Optionally solid or perforated
- For mounting on the subrack side panel with the aid of mounting blocks

Material

1.0 mm aluminium, unplated, hole diameter 4 mm in perforated version.

Each set includes

2 cover plates
8 mounting blocks 28.5 mm
24 assembly screws

Individual unit includes

1 cover plate



Note

For EMC applications, additional mounting blocks must be fitted across the entire subrack depth.

| HP | For side panel depth (T) mm | Cover depth (d1) mm | Order No. | | | |
|----|-----------------------------|---------------------|----------------------------|-----------------|-----------------|-----------------|
| | | | Single piece ¹⁾ | | Set | |
| | | | Perforated | Solid | Perforated | Solid |
| 21 | 225 | 192 | 3687.618 | 3687.620 | - | - |
| 21 | 285 | 252 | 3687.619 | 3687.621 | - | - |
| 42 | 175 | 142 | 3684.957 | 3687.626 | - | - |
| 42 | 225 | 192 | 3687.623 | 3687.627 | - | - |
| 42 | 245 | 212 | 3684.958 | 3687.628 | - | - |
| 42 | 285 | 252 | 3685.642 | 3687.629 | - | - |
| 84 | 175 | 142 | 3684.681 | 3684.680 | 3685.245 | 3685.250 |
| 84 | 225 | 192 | 3684.694 | 3684.683 | - | - |
| 84 | 235 | 202 | 3685.851 | 3685.813 | - | - |
| 84 | 245 | 212 | 3684.695 | 3684.684 | 3685.246 | 3685.251 |
| 84 | 285 | 252 | 3684.696 | 3684.685 | - | - |
| 84 | 295 | 262 | 3685.855 | 3685.814 | - | - |
| 84 | 305 | 272 | 3685.852 | 3684.686 | 3685.247 | 3685.252 |
| 84 | 345 | 312 | 3684.698 | 3684.687 | - | - |
| 84 | 365 | 332 | 3685.853 | 3684.688 | 3685.248 | 3685.253 |
| 84 | 405 | 372 | 3684.700 | 3684.689 | 3685.249 | 3685.254 |
| 84 | 465 | 432 | 3684.701 | 3684.691 | - | - |
| 84 | 525 | 492 | 3684.702 | 3684.692 | - | - |
| 84 | 585 | 552 | 3684.703 | 3684.693 | - | - |


+ Also required

- ¹⁾ Mounting blocks, see page 148
- ¹⁾ EMC gaskets for cover plates, see page 147
- ¹⁾ Assembly screws, packs of 100, order no. 3684.233, see page 202



COMPONENTS AND ACCESSORIES COVERS

Covers version 2

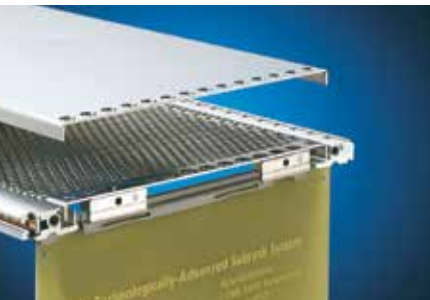

For all HeiPac Vario subracks

To cover the PCB depth

- Flat design for top and bottom
- Optionally solid or perforated
- For mounting on the subrack side panel with the aid of mounting blocks

Material

1.0 mm aluminium, unplated, hole diameter 4 mm in perforated version

Each set includes

2 cover plates
8 mounting blocks 28.5 mm
24 assembly screws

Individual unit includes:



1 cover plates

| | | | Order No. | | | |
|----|-----------------------|---------------------|----------------------------|-----------------|-----------------|-----------------|
| | | | Single piece ¹⁾ | | Set | |
| HP | For PCB depth (d2) mm | Cover depth (d1) mm | Perforated | Solid | Perforated | Solid |
| 21 | 160 | 142 | 3687.630 | 3687.634 | - | - |
| 21 | 220 | 202 | 3687.631 | 3687.635 | - | - |
| 42 | 160 | 142 | 3684.957 | 3687.626 | - | - |
| 42 | 220 | 202 | 3687.633 | 3687.637 | - | - |
| 42 | 280 | 262 | 3687.638 | 3687.639 | - | - |
| 84 | 160 | 142 | 3684.681 | 3684.680 | 3685.245 | 3685.250 |
| 84 | 220 | 202 | 3685.851 | 3685.813 | - | - |
| 84 | 280 | 262 | 3685.855 | 3685.814 | - | - |
| 84 | 340 | 322 | 3685.856 | - | - | - |
| 84 | 400 | 382 | 3685.857 | - | - | - |

+ Also required

¹⁾ Mounting blocks, see page 148

¹⁾ Assembly screws, packs of 100, order no. 3684.233, see page 202



Covers version 3



For all HeiPac Vario subracks

To cover the overall subrack depth (EMC application)

- Cover with 1 U edge fold (item 1), to conceal the 1 U area in the subrack
- A version 1 fl at cover (item 2) is additionally required
- Optionally perforated or solid on the front
- Suitable for subracks 4 U (3 + 1), 7 U (6 + 1)
- For mounting on the subrack side panel with the aid of mounting blocks

Material

1.0 mm aluminium, unplated, hole diameter 4 mm in perforated version.

Note

For EMC applications, mounting blocks must be fitted across the entire subrack depth.

| | | | Order No. | |
|----|-----------------------------|---------------------|-----------------|-----------------|
| HP | For side panel depth (T) mm | Cover depth (d3) mm | Perforated | Solid |
| 84 | 285 | 270 | 3684.720 | 3684.714 |
| 84 | 345 | 330 | 3684.721 | 3684.715 |
| 84 | 405 | 390 | 3684.722 | 3684.716 |
| 84 | 465 | 450 | 3684.723 | 3684.717 |
| 84 | 525 | 510 | 3684.724 | 3684.718 |
| 84 | 585 | 570 | 3684.725 | 3684.719 |



+ Also required

Mounting blocks, see page 148


EMC gaskets for covers, see page 147

Assembly screws, packs of 100, order no. 3684.233, see page 202

Cover, version 1, see page 161



Covers version 4

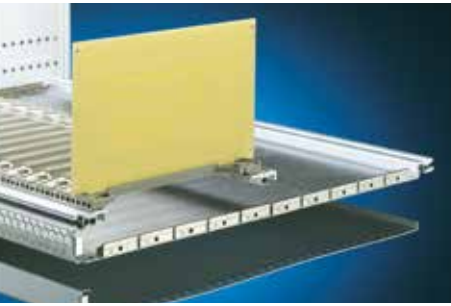

For all HeiPac Vario subracks

To cover the overall subrack depth (EMC application)

- Cover top/bottom with ½ U edge fold to cover the ½ U section in the subrack
- Optionally perforated or solid on the front
- Suitable for subracks 4 U (3 + 2 x ½), 7 U (6 + 2 x ½)
- For mounting on the subrack side panel with the aid of mounting blocks.

Material

1.0 mm aluminium, unplated, hole diameter 4 mm in perforated version.

Note

For EMC applications, mounting blocks must be fitted across the entire subrack depth.



| HP | For side panel depth (T) mm | Cover depth (d3) mm | Order No. | |
|----|-----------------------------|---------------------|-----------------|-----------------|
| | | | Perforated | Solid |
| 84 | 285 | 270 | 3684.732 | 3684.726 |
| 84 | 345 | 330 | 3684.733 | 3684.727 |
| 84 | 405 | 390 | 3684.734 | 3684.728 |
| 84 | 465 | 450 | 3684.735 | 3684.729 |
| 84 | 525 | 510 | 3684.736 | 3684.730 |
| 84 | 585 | 570 | 3684.737 | 3684.731 |

+ Also required

Mounting blocks, see page 148

EMC gaskets for covers, see page 147

Assembly screws, packs of 100, order no. 3684.233, see page 202



Covers version 5



For all HeiPac Vario subracks

To cover the overall subrack depth or PCB depth. (EMC application)

Simple assembly:

- Side edge fold with half shears facilitates fast assembly (without mounting blocks) by simply snap-fastening
- Side notches for fitting horizontal rails in 160, 220 or 280 mm depth
- Optionally solid or perforated



Material

1.0 mm aluminium, unplated, hole diameter 4 mm in perforated version.

Supply includes


2 gaskets

| HP | Position of side notches for horizontal rails mm | For side panel depth mm | Order No. | |
|----|--|-------------------------|-----------------|-----------------|
| | | | Perforated | Solid |
| 21 | 160 | 175/185 | 3687.624 | - |
| 21 | 160/220 | 235 | 3687.692 | - |
| 42 | 160 | 175/185 | 3687.625 | - |
| 42 | 160/220 | 235 | 3687.677 | - |
| 42 | 160 | 245 | 3687.640 | - |
| 84 | 160 | 175/185 | 3687.641 | 3687.647 |
| 84 | 160 | 245 | 3687.642 | 3687.648 |
| 84 | 160/220 | 235 | 3687.643 | 3687.649 |
| 84 | 160/220 | 285 | 3687.644 | 3687.650 |
| 84 | 160/220 | 305 | 3687.645 | 3687.651 |
| 84 | 160/220/280 | 345 | 3687.646 | 3687.652 |



COMPONENTS AND ACCESSORIES COVERS

Covers for HeiPac EASY

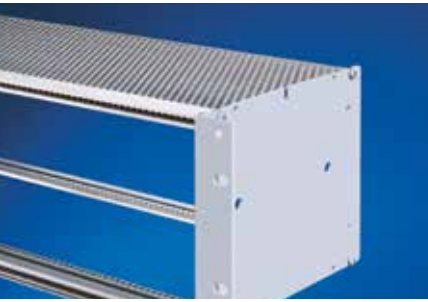

- Perforated or solid
- Optionally with screwed fastening clips on the side panels for additional support

Material

Aluminium

Supply includes

2 cover plates

Cover plates

version 1 (slide-in)

The covers are simply slid into the front and rear horizontal rails for mounting backplanes/connectors.

version 2 (slide-in/screw-in)

For mounting additional rear horizontal rails on the rear panels. The horizontal rails for backplane/connector assembly are top-mounted.

The covers are slid in the front horizontal rails and screwed in the rear horizontal rails for rear panel mounting.



Version 1

| HP | For side panel depth mm | Order No. | |
|----|-------------------------|-----------------|-----------------|
| | | Perforated | Solid |
| 84 | 175 | 3634.685 | 3634.675 |
| 84 | 235 | 3634.690 | 3634.680 |

Version 2

| HP | For side panel depth mm | Order No. | |
|----|-------------------------|--------------------------|---------------------|
| | | Perforated ¹⁾ | Solid ¹⁾ |
| 84 | 175 | 3634.650 | 3634.625 |
| 84 | 235 | 3634.655 | 3634.630 |
| 84 | 295 | 3634.660 | 3634.635 |
| 84 | 355 | 3634.665 | 3634.640 |
| 84 | 415 | 3634.670 | 3634.645 |

+ Also required

¹⁾ assembly screws, packs of 100
order no. 3684.233
see page 202

+ Accessories



Fastening clips

Fastening clips


| Packs of | Order No. |
|----------|-----------------|
| 50 | 3634.450 |

Assembly screws for fastening clips

| Packs of | Order No. |
|----------|-----------------|
| 100 | 9921.879 |



Covers for HeiPac Vario ECO

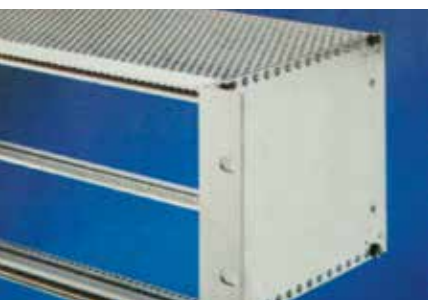

To cover the overall subrack depth

- Perforated or solid
- The covers are slid into the horizontal rails
- Optionally with screwed fastening clips for additional support

Material

Sheet steel

Surface finish

Zinc-plated

Supply includes

1 cover plate



| HP | For side panel depth mm | Order No. | |
|----|-------------------------|-----------------|-----------------|
| | | Perforated | Solid |
| 84 | 175 | 3688.105 | 3688.107 |
| 84 | 235 | 3688.106 | 3688.108 |


+ Accessories

Fastening clips


| Packs of | Order No. |
|----------|-----------------|
| 1 | 3688.109 |

Assembly screw

| Packs of | Order No. |
|----------|-----------------|
| 100 | 9921.879 |



1 for backplane



2 for backplane

Flat front panels with extractor handle




With type I or II extractor handle
Complete modular systems

Material

Front panel: 2,5 mm Aluminium anodised
Handle: Plastic black

Supply includes


1 front panel
2 handles (1 with 3 U)
1 set of assembly parts
1 PCB holder (for 3 U)

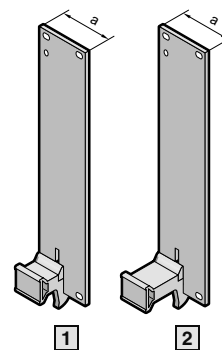


| U | HP | a mm | Order No. | |
|---|----|------|-----------------|-----------------|
| | | | 1 Type I. | 2 Type II |
| 3 | 4 | 20.0 | 3684.330 | 3684.358 |
| 3 | 5 | 25.1 | 3684.331 | 3684.359 |
| 3 | 6 | 30.2 | 3684.332 | 3684.360 |
| 3 | 7 | 35.3 | 3684.333 | 3684.361 |
| 3 | 8 | 40.3 | 3684.334 | 3684.362 |
| 3 | 10 | 50.5 | 3684.335 | 3684.363 |
| 3 | 12 | 60.7 | 3684.336 | 3684.364 |
| 6 | 4 | 20.0 | 3684.337 | 3684.365 |
| 6 | 5 | 25.1 | 3684.338 | 3684.366 |
| 6 | 6 | 30.2 | 3684.339 | 3684.367 |
| 6 | 7 | 35.2 | 3684.340 | 3684.368 |
| 6 | 8 | 40.3 | 3684.341 | 3684.369 |
| 6 | 10 | 50.5 | 3684.342 | 3684.370 |
| 6 | 12 | 60.7 | 3684.343 | 3684.371 |
| 9 | 4 | 20.0 | - | 3684.372 |
| 9 | 8 | 40.3 | - | 3684.373 |

Front panels with type I, II or IV, IVs, VII extractor handles


3 U



6 U

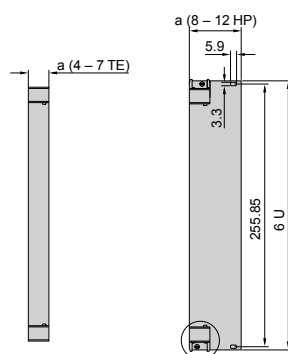


9 U

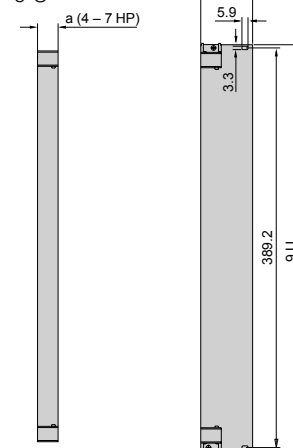


Extractor handles

Type I



Type II

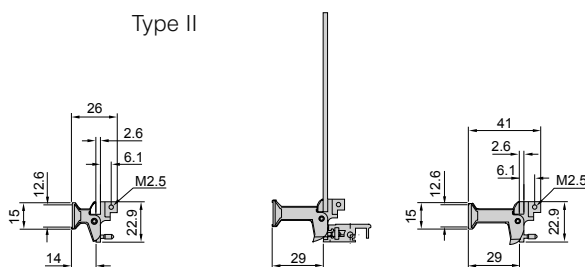

COMPONENTS AND ACCESSORIES

FRONT PANELS AND HANDLES

U-channel front panels with injector/extractor handle




With type I, II extractor handle or type IV injector/extractor handle
Complete modular systems

Material

front panel: extruded aluminium section
clear-chromated
Handle: plastic
black

Supply includes

1 front panel
2 handles (1 with 3 U)
1 EMC gasket, vertical, version 1
1 set of assembly parts
1 PCB holder (for 3 U)



Detailed drawing
see page 168 ff.





| U | HP | a mm | Order No. | | |
|---|----|------|--------------|--------------|----------------------------|
| | | | 1 Type I. | 2 Type II | 3 Type IV ¹⁾ |
| 3 | 4 | 20.0 | 3684.344 | 3684.374 | 3684.413 |
| 3 | 5 | 25.1 | 3684.345 | 3684.375 | 3684.414 |
| 3 | 6 | 30.2 | 3684.346 | 3684.376 | 3684.415 |
| 3 | 7 | 35.3 | 3684.347 | 3684.377 | 3684.416 |
| 3 | 8 | 40.3 | 3684.348 | 3684.378 | 3684.417 |
| 3 | 10 | 50.5 | 3684.349 | 3684.379 | 3684.418 |
| 3 | 12 | 60.7 | 3684.350 | 3684.380 | 3684.419 |
| 6 | 4 | 20.0 | 3684.351 | 3684.381 | 3684.420 |
| 6 | 5 | 25.1 | 3684.352 | 3684.382 | 3684.421 |
| 6 | 6 | 30.2 | 3684.353 | 3684.383 | 3684.422 |
| 6 | 7 | 35.2 | 3684.354 | 3684.384 | 3684.423 |
| 6 | 8 | 40.3 | 3684.355 | 3684.385 | 3684.424 |
| 6 | 10 | 50.5 | 3684.356 | 3684.386 | 3684.425 |
| 6 | 12 | 60.7 | 3684.357 | 3684.387 | 3684.426 |
| 9 | 4 | 20.0 | - | 3684.388 | 3684.427 |
| 9 | 5 | 25.1 | - | - | 3684.428 |
| 9 | 6 | 30.2 | - | - | 3684.429 |
| 9 | 7 | 35.3 | - | - | 3684.430 |
| 9 | 8 | 40.3 | - | 3684.389 | 3684.431 |
| 9 | 10 | 50.5 | - | - | 3684.432 |
| 9 | 12 | 60.7 | - | - | 3684.433 |



¹⁾Can only be inserted in conjunction with front horizontal rails, with 10 mm roof (Vario V-Ext. 1), see page 133

Front panels for type I, II, IV, IVs or VII handles



3 U



6 U




9 U

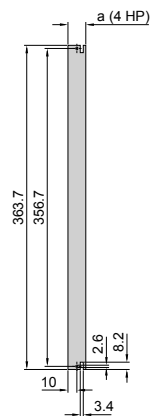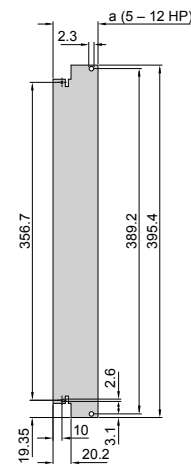

¹⁾ 2.3 mm drilled hole not contained in versions 5 – 7 HP.

Flat front panels for handles

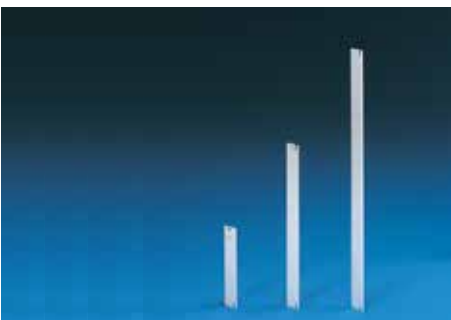


For type I, II extractor handle or type IV, IVs or VII injector/extractor handle

Material

2,5 mm Aluminium
Anodised

Detailed drawing front panel
see page 165




+ Also required

From front panel widths of 4 HP (at 3 U) and 8 HP (at 6 U):
Collar screws and plastic collars, packs of 100 sets,
order no. 3658.160, see page 202
For 3 U front panels:
PCB holder set, see page 177

| HP | a mm | Order No. | | |
|----|------|-----------------|-----------------|-----------------|
| | | 3 U | 6 U | 9 U |
| 4 | 20.0 | 3685.500 | 3685.508 | 3685.516 |
| 5 | 25.1 | 3685.501 | 3685.509 | 3685.517 |
| 6 | 30.2 | 3685.502 | 3685.510 | 3685.518 |
| 7 | 35.3 | 3685.503 | 3685.511 | 3685.519 |
| 8 | 40.3 | 3685.504 | 3685.512 | 3685.520 |
| 10 | 50.5 | 3685.505 | 3685.513 | 3685.521 |
| 12 | 60.7 | 3685.506 | 3685.514 | 3685.522 |

U-channel front panels for handles

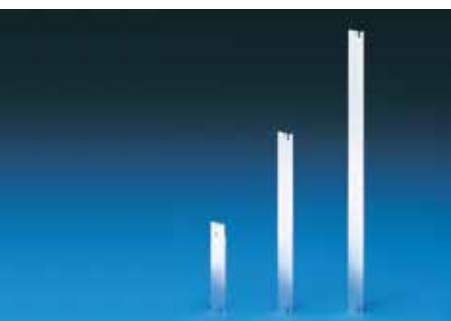


For type I, II extractor handle or type IV, IVs or VII injector/extractor handle

Material

2,5 mm extruded aluminium section
clear-chromated

Detailed drawing front panel
see page 166

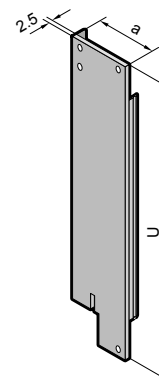

+ Also required

From front panel width 4 HP (for 3 U) and 8 HP (for 6 U):
Slotted centering screws, packs of 100,
order no. 3687.050, see page 203
Posidrive centering screws, packs of 100,
order no. 3687.051, see page 203
EMC gaskets, see page 146
For 3 U front panels:
PCB holder set, see page 177

| HP | a mm | Order No. | | |
|----|------|-----------------|-----------------|-----------------|
| | | 3 U | 6 U | 9 U |
| 4 | 20.0 | 3685.524 | 3685.532 | 3685.540 |
| 5 | 25.1 | 3685.525 | 3685.533 | 3685.541 |
| 6 | 30.2 | 3685.526 | 3685.534 | 3685.542 |
| 7 | 35.3 | 3685.527 | 3685.535 | 3685.543 |
| 8 | 40.3 | 3685.528 | 3685.536 | 3685.544 |
| 10 | 50.5 | 3685.529 | 3685.537 | 3685.545 |
| 12 | 60.7 | 3685.530 | 3685.538 | 3685.546 |

COMPONENTS AND ACCESSORIES

FRONT PANELS AND HANDLES

Extractor handle type I and type II



- Suitable for flat front panels/U-channel front panels
- With removal function
- May be used in combination with horizontal rails with 10 mm extension.

Supply includes

Assembly parts

Note

With 3 U, only one extractor handle is required.

1 Type I extractor handle, 15 mm


| Colour | Packs of | Order No. |
|--------|----------|-----------------|
| Grey | 1 | 3685.587 |
| Black | 1 | 3685.589 |

2 Type II extractor handle, 30 mm


| Colour | Packs of | Order No. |
|--------|----------|-----------------|
| Grey | 1 | 3685.588 |
| Black | 1 | 3685.590 |

+ Accessories

Identification strips for extractor handles, see page 169

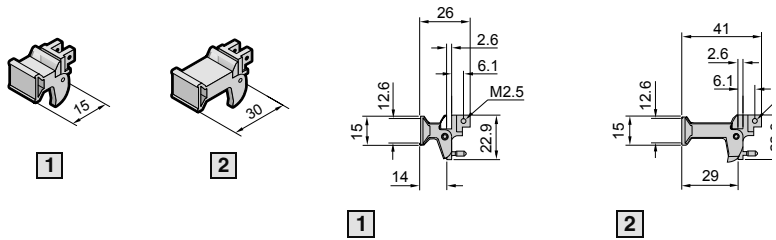

Injector/extractor handle type IV

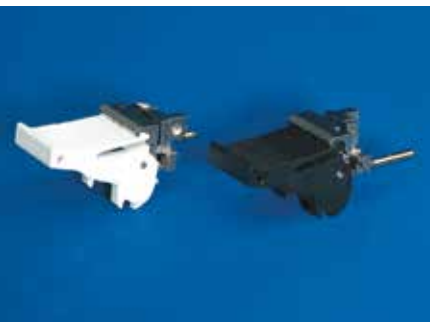

Handles with micro-switch

For inserting and removing connectors with a large number of pins.

- Insertion/removal function
- Integral microswitch for "live insertion" applications
- Self-activation of the micro-switch during insertion/removal
- ESD pin to dissipate static charges before contacting the connectors and for precise positioning of the board type plug-in unit
- Keyable
- Integral PCB attachment
- Self-locking
- Bayable

Handle without micro-switch

Description see above.
Micro-switch may be retrofitted.

Supply includes

1 handle without or with micro-switch, assembly parts

Note

- Insertion only when used with front horizontal rails, with 10 mm extension see page 133 ff.
- With 3 U front panels, only one extractor handle is required

Handles with micro-switch

| Colour | Installation | Packs of | Order No. |
|--------|--------------|----------|-----------------|
| Grey | Top | 1 | 3686.905 |
| Grey | Bottom | 1 | 3686.904 |
| Black | Top | 1 | 3686.907 |
| Black | Bottom | 1 | 3686.906 |

Handle without micro-switch

| Colour | Installation | Packs of | Order No. |
|--------|--------------|----------|-----------------|
| Grey | Top | 1 | 3686.901 |
| Grey | Bottom | 1 | 3686.900 |
| Black | Top | 1 | 3686.903 |
| Black | Bottom | 1 | 3686.902 |

+ Accessories

Keys, see page 159
Keyable guide rails, see page 156
Micro-switches, see page 171
Connector pin for baying, see page 170



Injector/extractor handle type IV



8 HP, bayed
Suitable for two front panels 4 HP that must be connected to another mechanically.

Supply includes

2 bayed handles
fully assembled

| Colour | Installation | Packs of | Order No. |
|--------|--------------|----------|-----------------|
| Black | Bottom | 1 | 3686.908 |
| Black | Top | 1 | 3686.909 |

+ Accessories

Connector pin for baying,
see page 170

Identification strips for extractor handles



For type I, II extractor handle and type IV injector/extractor handle
Width 4 HP

| Packs of | Order No. |
|----------|-----------------|
| 100 | 3684.328 |

Injector/extractor handle type IVs



With push-button

For inserting and removing connectors with a large number of pins. A metal insert ensures reliable functioning, even at forces of up to 815 N.

- Insertion/removal function
- Push-button for locking and unlocking the board type plug-in unit (cannot be extracted in the locked position)
- Optionally with 1/2 HP offset PCB attachment, e. g. for component mounting on both sides
- Optional integral micro-switch for "live insertion" applications
- ESD pin to dissipate static charges before contacting the connectors and for precise positioning of the board type plug-in unit
 - according to IEEE 1101.1
 - Keyable
 - Integral PCB attachment
 - Bayable

Material

Plastic/metal

Supply includes

Assembly parts

Note

- Insertion only when used with front horizontal rails, with 10 mm extension see page 133 ff.
- With 3 U front panels, only one extractor handle is required.

Handles without offset


| Installation | Packs of | Order No. |
|--------------|----------|-----------------|
| Top | 1 | 3688.770 |
| Bottom | 1 | 3688.771 |

Handles with 1/2 HP offset

| Installation | Packs of | Order No. |
|--------------|----------|-----------------|
| Top | 1 | 3688.772 |
| Bottom | 1 | 3688.773 |

+ Accessories

Keys,
see page 159
Keyable guide rails with 1/2 HP offset,
see page 156
Micro-switches,
see page 171
Connector pin for baying,
see page 170



COMPONENTS AND ACCESSORIES

FRONT PANELS AND HANDLES

Connection pin for injector/extractor handles



For injector/extractor handles, types IV, IVs and VII

The connection pin can be used to connect injector/extractor handles, types IV, IVs and VII.

Material

Steel

| Packs of | Order No. |
|----------|-----------------|
| 20 | 3685.319 |

Injector/extractor handle type VII



Plastic

For inserting and removing connectors with a large number of pins. This handle was specifically designed for use in telecom applications.

- Insertion/removal function
- Optionally with 1/2 HP offset PCB attachment, e. g. for component mounting on both sides
- Minimum front space requirements, due to foldup handle
- Optional integral micro-switch for "live insertion" applications
- ESD pin to dissipate static charges prior to making contact with the connectors and for precise positioning of the board type plug-in unit
- Keyable
- Large labelling area on the front

Material

Plastic

Supply includes

Assembly parts

Note

- Insertion only when used with front horizontal rails, with 10 mm extension see page 133 ff.

Handles without off set


| Installation | Packs of | Order No. |
|--------------|----------|-----------------|
| Top | 1 | 3688.784 |
| Bottom | 1 | 3688.785 |

Handles with 1/2 HP offs et

| Installation | Packs of | Order No. |
|--------------|----------|-----------------|
| Top | 1 | 3688.780 |
| Bottom | 1 | 3688.781 |

+ Accessories

Keys, see page 159
 Keyable guide rails with 1/2 HP offset, see page 156
 Micro-switches, see page 171
 Connector pin for buying, see page 170



Injector/extractor handle type VII



Metal

For inserting and removing PCBs with a high connector pin-count (up to 815 N). This handle was specifically designed for use in telecom applications.

- Insertion/removal function
- Optionally with 1/2 HP offset PCB attachment, e. g. for component mounting on both sides
- Minimum front space requirements due to foldup handle
- Optional integral micro-switch for "live insertion" applications
- ESD pin to dissipate static charges prior to making contact with the connectors and for precise positioning of the board type plug-in unit
- Keyable
- Metal design for use in aggressive atmospheres

Material

Die-cast zinc

Supply includes

Assembly parts

Note

Insertion only when used with front horizontal rails, with 10 mm extension see page 133 ff.

Handles without off set


| Installation | Packs of | Order No. |
|--------------|----------|-----------------|
| Top | 1 | 3688.790 |
| Bottom | 1 | 3688.791 |

Handles with 1/2 HP offs et

| Installation | Packs of | Order No. |
|--------------|----------|-----------------|
| Top | 1 | 3688.786 |
| Bottom | 1 | 3688.787 |

+ Accessories

Keys, see page 159
Keyable guide rails with 1/2 HP offset, see page 156
Micro-switches, see page 171
Connector pin for buying, see page 170



Micro-switch



For "live insertion" applications. Installation in injector/extractor handles, types IV, IVs and VII. May also be retro-fitted.

Technical specifications

Switching load: 50 mA 30 V DC


Service life:
At nominal load: 30.000
mechanical: 50.000

| Packs of | Order No. |
|----------|-----------------|
| 10 | 3684.410 |

+ Accessories

Micro-switch mounting clip, see page 172

Micro-switch

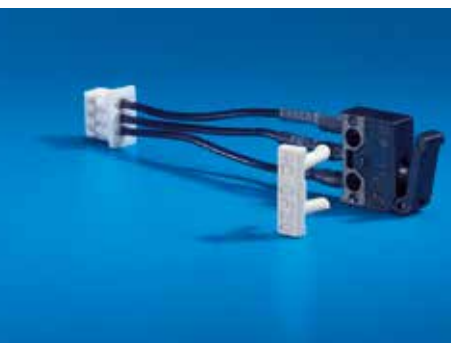

With cable and connector



For "live insertion" applications. Installation in injector/extractor handles, types IV, IVs and VII.

Supply includes

Micro-switch, connector type Molex 51021-0300, mounting clips, 3 cables, 25 mm x #32 AWG, fully assembled

| Packs of | Order No. |
|----------|-----------------|
| 1 set | 3686.536 |

- 1 Lever not depressed
- 2 Lever hinge
- 3 Lever contact point

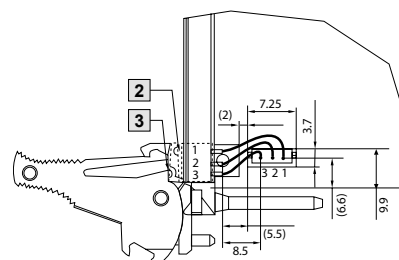

COMPONENTS AND ACCESSORIES

FRONT PANELS AND HANDLES

Micro-switch mounting clip



For mounting micro-switches in handles

| Packs of | Order No. |
|----------|-----------------|
| 10 | 3684.411 |

Plastic covers for PCBs





For mechanical protection of the component side and of the EMC gaskets. Attachment holes as per CPCI or VME-specifications. Optionally available as perforated or solid version.

Material

0,5 mm plastic, transparent, anti-static UL 94-V0, maximum temperature up to 65°C

¹⁾ 0,5 mm plastic, black, anti-static UL 94-V0, maximum temperature up to 120°C

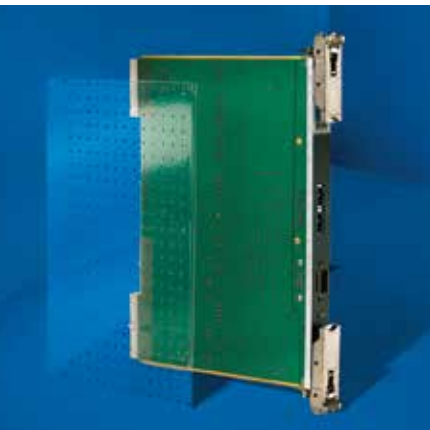


| For PCBs | Packs of | Order No. | | | |
|--------------|----------|------------------------------|------------------------------|-----------------|-----------------|
| | | for CPCI | | for VME | |
| | | Perforated | Solid | Solid | Solid |
| 3 U x 160 mm | 1 | 3687.932 | 3686.572 | 3685.966 | 3685.626 |
| | 5 | - | - | - | 3685.279 |
| 3 U x 220 mm | 1 | - | - | - | 3685.805 |
| | 5 | - | - | - | 3685.266 |
| 6 U x 80 mm | 1 | 3687.933 | 3686.573 | 3686.037 | 3686.146 |
| 6 U x 160 mm | 1 | 3687.934 | 3686.574 | 3685.967 | 3685.627 |
| | 1 | 9905.574¹⁾ | 9905.990¹⁾ | - | - |
| | 5 | - | - | - | 3685.280 |
| 6 U x 220 mm | 1 | - | - | - | 3685.824 |
| | 5 | - | - | - | 3685.000 |

+ Also required


Required for mounting the perforated CPCI covers:
 Mounting clips, Packs of = 100
 order no. 3687.955

Front panels for type III extractor handle

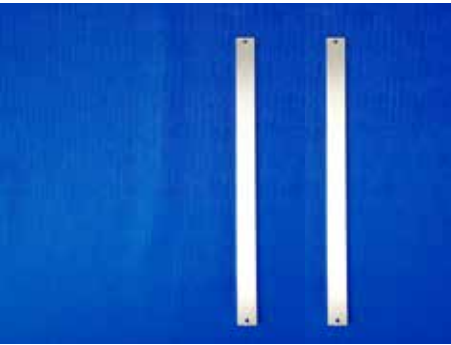

Material
1,0 mm extruded aluminium section

Surface finish
Untreated

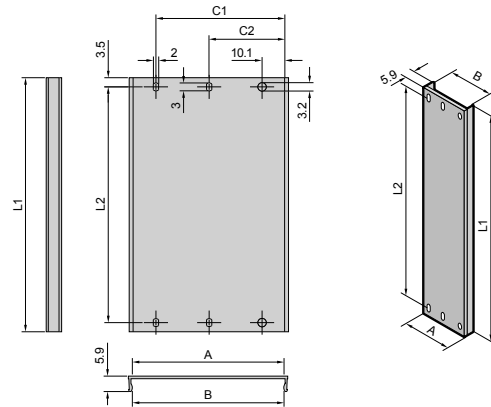

| HP | A mm | B mm | C1 mm | C2 mm | Order No. | | |
|-------|-------|-------|-------|-------|-----------------|-----------------|-----------------|
| | | | | | 3 U | 6 U | 9 U |
| 4 | 15.20 | 12.20 | - | - | 3685.548 | 3685.555 | - |
| 5 | 20.22 | 17.20 | - | - | 3685.549 | 3685.556 | 3685.562 |
| 6 | 25.28 | 22.28 | - | 22.68 | 3685.550 | 3685.557 | 3685.563 |
| 7 | 30.36 | 27.36 | - | 25.22 | 3685.551 | 3685.558 | 3685.564 |
| 8 | 40.52 | 37.52 | - | 30.30 | 3685.552 | 3685.559 | 3685.566 |
| 10 | 50.68 | 47.68 | 40.46 | 25.22 | 3685.553 | 3685.560 | 3685.567 |
| 12 | 60.84 | 57.84 | 50.62 | 30.30 | 3685.554 | 3685.561 | 3685.568 |
| L1 mm | | | | | 97.00 | 230.35 | 363.70 |
| L2 mm | | | | | 90.00 | 223.35 | 356.70 |



Type III extractor handle



Material
Fibreglass-reinforced polycarbonate
Base section nickel-plated ABS

Colour
Grey

| HP | Packs of | Order No. |
|----|----------|-----------------|
| 3 | 1 | 3685.591 |
| 4 | 1 | 3685.592 |

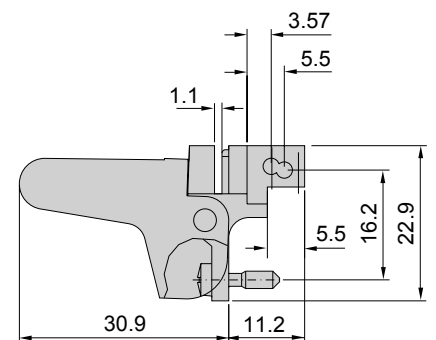

Covers for panel end spaces for type III extractor handle




Material
Fibreglass-reinforced polycarbonate

| HP | Width mm | Packs of | Order No. |
|----|----------|----------|-----------------|
| 1 | 5 | 1 | 3687.529 |
| 2 | 10.08 | 1 | 3687.530 |
| 4 | 20.24 | 1 | 3687.531 |

COMPONENTS AND ACCESSORIES FRONT PANELS AND HANDLES

Universal holder for front panel support

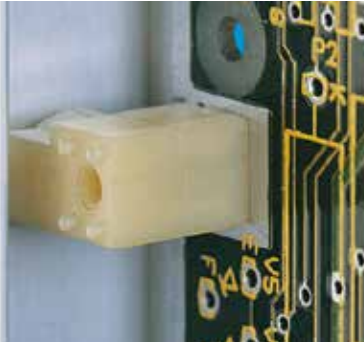

Material
Plastic

| HP | Packs of | Order No. |
|----|----------|-----------|
| 4 | 1 | 3687.545 |

Flat front panels with type V handle and PCB holder



Complete modular systems

Material

Frontplatte: 2,5 mm Aluminium natural-anodised
 Handle: Aluminium natural-anodised
 PCB holder: Polycarbonate



Supply includes

1 front panel
 1 handle (2 with 6 U)
 1 PCB holder (2 with 6 U)
 Assembly parts


| HP | a mm | B mm | Order No. | |
|----|------|------|------------------|-------------------|
| | | | 3 U H = 128.7 | 6 U H = 262.05 |
| 3 | 14.9 | - | 3652.000 | 3652.200 |
| 4 | 20.0 | - | 3652.010 | 3652.210 |
| 5 | 25.1 | - | 3652.020 | 3652.220 |
| 6 | 30.1 | - | 3652.030 | 3652.230 |
| 7 | 35.2 | - | 3652.040 | 3652.240 |
| 8 | 40.3 | - | 3652.050 | 3652.250 |
| 10 | 50.5 | 35.6 | 3652.060 | 3652.260 |
| 12 | 60.6 | 45.7 | 3652.070 | 3652.270 |
| 14 | 70.8 | 55.9 | 3652.080 | - |

+ Accessories

Identification strips for handles,
 see page 177

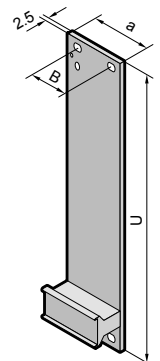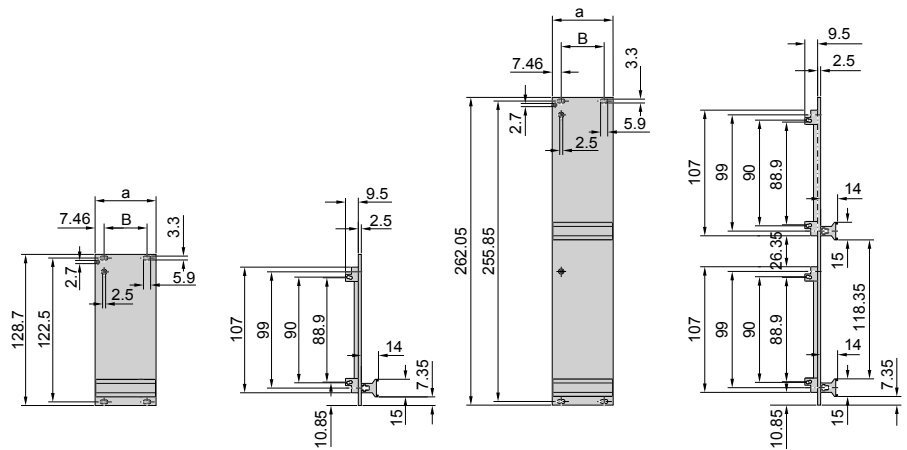


Flat front panels for type V and VI handle

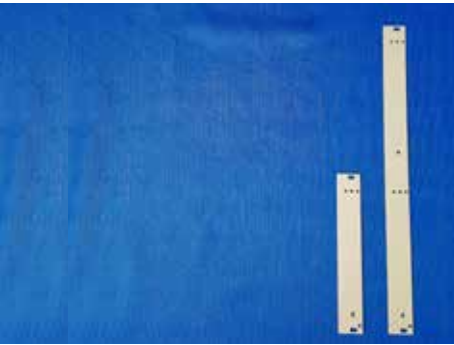

Material

2,5 mm Aluminium, anodised

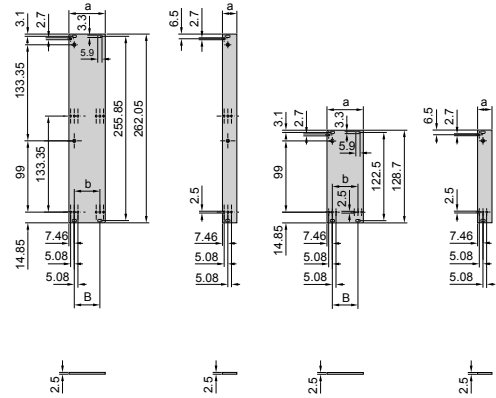


| HP | a mm | B mm | b mm | Packs of | Order No. | |
|----|---------|---------|---------|----------|-----------------|-----------------|
| | | | | | 3 U | 6 U |
| 3 | 14.9 | - | - | 1 | 3685.569 | 3685.578 |
| 4 | 20.0 | - | - | 1 | 3685.570 | 3685.579 |
| 5 | 25.1 | - | - | 1 | 3685.571 | 3685.580 |
| 6 | 30.2 | - | 15.2 | 1 | 3685.572 | 3685.581 |
| 7 | 35.2 | - | 20.3 | 1 | 3685.573 | 3685.582 |
| 8 | 40.3 | - | 25.4 | 1 | 3685.574 | 3685.583 |
| 10 | 50.5 | 35.6 | 35.6 | 1 | 3685.575 | 3685.584 |
| 12 | 60.6 | 45.7 | 45.7 | 1 | 3685.576 | 3685.585 |
| 14 | 70.8 | 55.9 | 55.9 | 1 | 3685.577 | 3685.586 |

+ Also required

Collar screws and plastic collars,
packs of 100 sets, order no. 3658.160,
see page 202


+ Accessories

Handles type V
see page 176
Handles type VI
see page 177

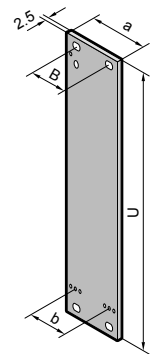

COMPONENTS AND ACCESSORIES FRONT PANELS AND HANDLES

U-channel front panels for type V and VI handle

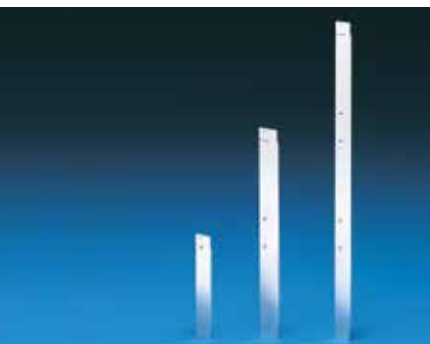

Material

2,5 mm Aluminium, clear-chromated

Supply includes

1 vertical EMC gasket, version 1.



| HP | a mm | B mm | Packs of | Order No. | |
|----|------|------|----------|-----------------|-----------------|
| | | | | 3 U | 6 U |
| 4 | 20.0 | - | 1 | 3687.655 | 3687.660 |
| 6 | 30.2 | - | 1 | 3687.656 | 3687.661 |
| 8 | 40.3 | - | 1 | 3687.657 | 3687.662 |
| 10 | 50.5 | 35.6 | 1 | 3687.658 | 3687.663 |
| 12 | 60.6 | 45.7 | 1 | 3687.659 | 3687.664 |

+ Also required

Slotted centering screws,
packs of 100, order no. 3687.050,
see page 203

Cross-head centering screws,
packs of 100, order no. 3687.051
see page 203

+ Accessories

Handles type V

see page 176

Handles type VI

see page 177

Detailed drawing,

see page 175

Type V handle, plastic




Material

Plastic

| HP | Colour | Packs of | Order No. |
|----|--------|----------|-----------------|
| 3 | Grey | 1 | 3685.490 |
| 4 | Grey | 1 | 3685.491 |
| 8 | Grey | 1 | 3685.492 |
| 12 | Grey | 1 | 3685.493 |
| 20 | Grey | 1 | 3685.494 |
| 3 | Black | 1 | 3685.495 |
| 4 | Black | 1 | 3685.496 |
| 8 | Black | 1 | 3685.497 |
| 12 | Black | 1 | 3685.498 |
| 20 | Black | 1 | 3685.499 |

+ Also required

Mounting kit,
packs of 1 set, order no. 3687.519
see page 202



Type V handle, aluminium




Material

Aluminium, anodised

| HP | Order No. | HP | Order No. |
|----|-----------------|-----|-----------------|
| 3 | 3685.595 | 12 | 3685.602 |
| 4 | 3685.596 | 14 | 3685.603 |
| 5 | 3685.597 | 21 | 3685.761 |
| 6 | 3685.598 | 28 | 3685.762 |
| 7 | 3685.599 | 42 | 3685.763 |
| 8 | 3685.600 | 1 m | 3685.604 |
| 10 | 3685.601 | | |

+ Also required

Mounting kit
packs of 1 set, order no. 3687.146
(from 6 HP 2 packs required)
see page 203



Identification strips for type V handle, aluminium



For individual labelling of the handles

Material

0,5 mm Aluminium, anodised

| HP | Packs of | Order No. |
|-------|----------|-----------|
| 3 | 1 | 3685.746 |
| 4 | 1 | 3685.747 |
| 5 | 1 | 3685.748 |
| 6 | 1 | 3685.749 |
| 7 | 1 | 3685.750 |
| 8 | 1 | 3685.751 |
| 10 | 1 | 3685.752 |
| 12 | 1 | 3685.753 |
| 14 | 1 | 3685.754 |
| 21 | 1 | 3685.755 |
| 28 | 1 | 3685.756 |
| 42 | 1 | 3685.757 |
| 1 m | 1 | 3685.758 |
| 0.5 m | 5 | 3606.300 |

Type VI handle




Material

Aluminium, anodised.

| HP | Order No. | HP | Order No. |
|----|-----------|-----|-----------|
| 3 | 3685.605 | 12 | 3685.612 |
| 4 | 3685.606 | 14 | 3685.613 |
| 5 | 3685.607 | 21 | 3685.614 |
| 6 | 3685.608 | 28 | 3685.615 |
| 7 | 3685.609 | 42 | 3685.616 |
| 8 | 3685.610 | 84 | 3685.617 |
| 10 | 3685.611 | 1 m | 3685.618 |

+ Zusätzlich wird benötigt

Mounting kit
packs of 1 set, order no. 3687.146
(from 6 HP 2 packs required)
see page 203



PCB holder kit



For attaching the PCB to front panels with handle types I, II, IV, IVs, VII.

Material

Die-cast

Note

Only required at the top with 3 U front panels

| Packs of | Order No. |
|----------|-----------|
| 10 | 3685.198 |


+ Also required

For attaching the PCB to the PCB holder:

Pan-head screws
packs of 100, order no. 3654.320
see page 202

For attaching the front panel to the PCB holder:

Oval csk-screws
packs of 100, order no. 3685.282
see page 203



COMPONENTS AND ACCESSORIES

FRONT PANELS AND HANDLES

PCB holder for front panels



For attaching PCBs to front panels (handle type V, VI).

Material

Noryl

Supply includes


Assembly parts

Packs of


10

Order No.

3606.330




Front panels as filler panel

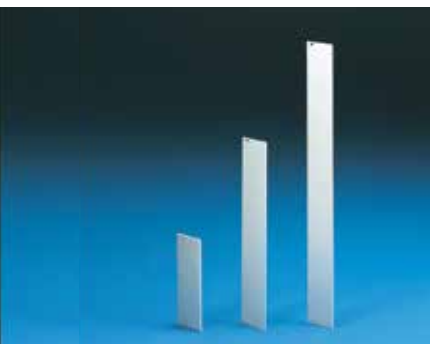

Flat

Material

2,5 mm Aluminium, natural-anodised

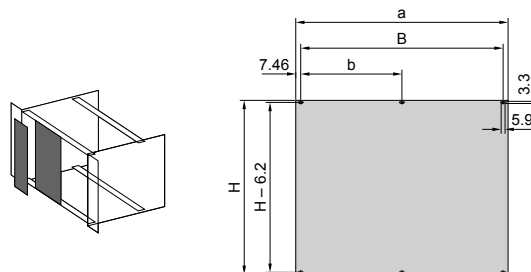

+ Also required

Collar screws and plastic collars, packs of 100 sets, order no. 3658.160, see page 202

| HP | a mm | B mm | b mm | Order No. | | | | | | |
|----|-------|-------|-------|-----------------|------------------|------------------|-------------------|-------------------|------------------|------------------|
| | | | | 1 U H = 39.8 | 2 U H = 84.25 | 3 U H = 128.7 | 4 U H = 173.15 | 6 U H = 262.05 | 7 U H = 306.5 | 9 U H = 395.4 |
| 2 | 9.8 | - | - | - | - | 3684.889 | - | 3684.911 | - | 3684.738 |
| 3 | 14.9 | - | - | - | - | 3684.890 | - | 3684.912 | - | - |
| 4 | 20.0 | - | - | - | - | 3684.891 | - | 3684.913 | - | 3684.739 |
| 5 | 25.1 | - | - | - | - | 3684.892 | - | 3684.914 | - | - |
| 6 | 30.2 | - | - | - | - | 3684.893 | - | 3684.915 | - | - |
| 7 | 35.2 | - | - | - | - | 3684.894 | - | 3684.916 | - | - |
| 8 | 40.3 | - | - | - | - | 3684.895 | - | 3684.917 | - | 3684.740 |
| 10 | 50.5 | 35.6 | - | - | - | 3684.896 | - | 3684.918 | - | - |
| 12 | 60.6 | 45.7 | - | - | - | 3684.897 | - | 3684.919 | - | 3684.741 |
| 14 | 70.8 | 55.9 | - | - | - | 3684.898 | - | 3684.920 | - | - |
| 20 | 101.3 | 86.4 | - | - | - | 3684.899 | - | 3684.921 | - | - |
| 21 | 106.4 | 91.4 | - | - | 3685.350 | 3684.900 | - | 3684.922 | - | - |
| 24 | 121.7 | 106.7 | - | - | 3685.429 | - | - | - | - | - |
| 27 | 136.8 | 121.9 | - | - | - | 3684.901 | - | 3684.923 | - | - |
| 28 | 141.9 | 127.0 | - | - | - | 3684.902 | - | 3684.924 | - | - |
| 40 | 202.9 | 188.0 | - | - | - | 3684.903 | - | 3684.976 | - | 3684.977 |
| 42 | 213.0 | 198.1 | - | 3684.885 | 3684.887 | 3684.904 | 3684.908 | 3684.925 | 3684.928 | 3684.742 |
| 60 | 304.5 | 289.6 | - | - | - | 3684.905 | - | - | - | - |
| 63 | 319.7 | 304.8 | 152.4 | - | - | 3684.906 | 3684.909 | 3684.926 | 3684.929 | - |
| 84 | 426.4 | 411.5 | 203.2 | 3684.886 | 3684.888 | 3684.907 | 3684.910 | 3684.927 | 3684.930 | 3684.743 |
| 85 | 431.5 | 431.5 | 203.2 | - | - | 3684.744 | 3684.745 | 3684.746 | 3684.747 | 3684.748 |

U-channel front panels as filler panels




Material

2,5 mm extruded aluminium section
Clear-chromated

Supply includes

1 front panel, one-piece
(with 2 – 14 HP version) or three-piece
(with > 14 HP version)
1 vertical EMC gasket, version 1
1 contact strip (three-piece only)
1 gasket strip (three-piece only)

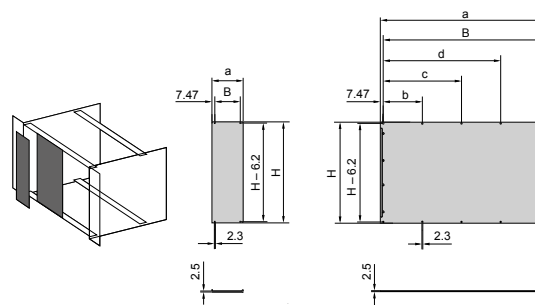

EMC

+ Also required

Slotted centering screws
packs of 100, order no. 3687.050
see page 203
Cross-head centering screws
packs of 100, order no. 3687.051
see page 203

| HP | a mm | B mm | b mm | c mm | d mm | Order No. | | | | | | |
|----|---------|---------|---------|---------|---------|-----------------|------------------|------------------|-------------------|-------------------|------------------|------------------|
| | | | | | | 1 U H = 39.8 | 2 U H = 84.25 | 3 U H = 128.7 | 4 U H = 173.15 | 6 U H = 262.05 | 7 U H = 306.5 | 9 U H = 395.4 |
| 2 | 9.8 | - | - | - | - | - | - | 3685.177 | - | 3685.185 | - | 3685.193 |
| 3 | 14.9 | - | - | - | - | - | - | 3686.138 | - | 3686.139 | - | 3686.140 |
| 4 | 20.0 | - | - | - | - | - | - | 3685.178 | - | 3685.186 | - | 3685.194 |
| 5 | 25.1 | - | - | - | - | - | - | 3685.179 | - | 3685.187 | - | - |
| 6 | 30.1 | - | - | - | - | - | - | 3685.180 | - | 3685.188 | - | - |
| 7 | 35.2 | - | - | - | - | - | - | 3685.181 | - | 3685.189 | - | - |
| 8 | 40.3 | 25.4 | - | - | - | - | - | 3685.182 | - | 3685.190 | - | 3685.195 |
| 10 | 50.5 | 35.6 | - | - | - | - | - | 3685.183 | - | 3685.191 | - | - |
| 12 | 60.6 | 45.7 | - | - | - | - | - | 3685.184 | - | 3685.192 | - | 3685.196 |
| 14 | 70.8 | 55.9 | - | - | - | - | - | 3684.249 | - | 3684.258 | - | 3684.278 |
| 16 | 80.9 | 66.0 | - | - | - | - | - | 3685.348 | - | 3685.349 | - | - |
| 20 | 101.3 | 86.4 | - | - | - | - | - | 3684.250 | - | 3684.259 | - | 3684.279 |
| 21 | 106.4 | 91.4 | - | - | - | - | - | 3684.272 | - | 3684.275 | - | - |
| 28 | 141.9 | 127.0 | 61.0 | - | - | - | - | 3684.251 | - | 3684.260 | - | - |
| 40 | 202.9 | 188.0 | 91.5 | - | - | - | - | 3684.273 | - | 3684.276 | - | 3684.280 |
| 42 | 213.0 | 198.1 | 96.5 | - | - | - | - | 3684.252 | 3684.255 | 3684.261 | 3684.264 | 3684.267 |
| 60 | 304.5 | 289.6 | 96.5 | 193.0 | - | - | - | 3684.274 | - | 3684.277 | - | - |
| 63 | 319.7 | 304.8 | 101.6 | 203.2 | - | - | - | 3684.253 | 3684.256 | 3684.262 | 3684.265 | 3684.268 |
| 84 | 426.4 | 411.5 | 101.6 | 203.2 | 304.8 | 3684.247 | 3684.248 | 3684.254 | 3684.257 | 3684.263 | 3684.266 | 3684.269 |

COMPONENTS AND ACCESSORIES

FRONT PANELS AND HANDLES

Front panels, hinged



Material
2.5 mm Aluminium
anodised

Supply includes
1 set of hinges
Assembly parts.

| U | HP | Order No. | |
|---|------------------|-------------------|---------------------|
| | | vertically hinged | horizontally hinged |
| 3 | 42 ¹⁾ | 3652.600 | 3652.500 |
| 3 | 84 ¹⁾ | 3652.610 | 3652.510 |
| 3 | 85 | - | 3684.291 |
| 4 | 85 | - | 3684.292 |
| 6 | 42 ¹⁾ | 3652.620 | 3652.520 |
| 6 | 84 ¹⁾ | 3652.630 | 3652.530 |
| 6 | 85 | - | 3684.293 |
| 7 | 85 | - | 3684.294 |
| 9 | 85 | - | 3684.295 |

+ Also required

¹⁾ With rear mounting of 42 HP and 84 HP front panels, additional trim sections must be attached at the rear of the subrack.
Rear trim sections, see page 57

EMC front panels, hinged



Material
2.5 mm Aluminium
Clear-chromated

Supply includes
1 front panel
1 set of hinges
1 contact strip
1 gasket strip
1 vertical EMC gasket, version 1
Assembly parts

| U | HP | Order No. |
|---|----|---------------------|
| | | horizontally hinged |
| 3 | 84 | 3684.298 |
| 4 | 84 | 3684.299 |
| 6 | 84 | 3684.300 |
| 7 | 84 | 3684.301 |
| 9 | 84 | 3684.302 |



Door cut-out trim for subracks installed indoors



Material
Aluminium

| Width | Packs of | Order No. |
|-------|----------|-----------------|
| ½ 19" | 2 | 3634.060 |
| 19" | 2 | 3634.070 |

Mezzanine front panels



Extruded aluminium section
For PCI mezzanine cards (PMC)
Conforms to IEEE 1386

Material/surface finish
Extruded aluminium section
clear-chromated

| Packs of | Order No. |
|----------|-----------------|
| 1 | 3688.658 |

+ Accessories

EMC seals
see page 181
Assembly screws M2.5 x 6,
packs of 100, order no. 3654.340,
see page 202

Mezzanine front panels



Die-cast zinc
For PCI mezzanine cards (PMC)
Conforms to IEEE 1386

| Packs of | Order No. |
|----------|-----------------|
| 1 | 3688.659 |

Material

Die-cast zinc

+ Accessories

EMC seals
see page 181
Assembly screws M2.5 x 6
packs of 100, order no. 3654.340
see page 202


Support spacers for mezzanine cards



10 mm, for mounting mezzanine cards

| Packs of | Order No. |
|----------|-----------------|
| 1 | 3688.663 |

Covers for mezzanine cut-outs

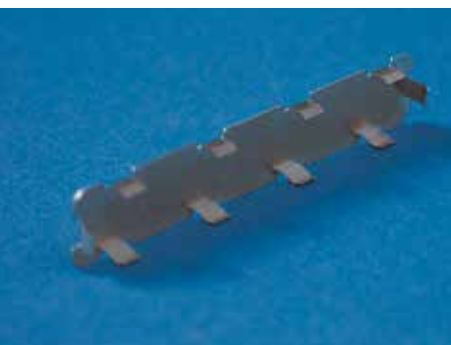

To conceal unused mezzanine cut-outs.
The covers are simply clipped into the
cut-outs.

| Packs of | Order No. |
|----------|-----------------|
| 1 | 3688.660 |

Material

Stainless steel

EMC seals for mezzanine front panels



For inserting into the all-round channel of
the mezzanine front panels.

Material/surface finish

Sealing ring made of conductive carbon
filled silicon, sealing gasket made from
stainless steel

| Design | Packs of | Order No. |
|----------------|----------|-----------------|
| Sealing ring | 1 | 3688.661 |
| Sealing gasket | 1 | 3688.662 |

COMPONENTS AND ACCESSORIES

BOX-TYPE PLUG-IN UNITS

HeiPac box-type plug-in units – type I



Technical specifications

Installation depth: 160 and 220 mm
 Height: 3 U and 6 U to IEC 60 297-3
 Rear panel to accommodate single connectors

Material

Front panel: 2.5 mm aluminium, pure anodised
 Rear panel: 2 mm aluminium, untreated
 Side panel profile: extruded aluminium profile, pure anodised
 Handle: aluminium, pure anodised
 PCB holder: plastic


Available on request

- box-type plug-in units in special sizes or printed
- EMC box-type plug-in units with EMC front panels

+ Accessories

Covers
 see page 184
 Guide rails
 see page 158
 Individual components
 see page 184

| HP | a mm | B mm | b mm | c mm | C mm | d mm | e mm | f mm | Order No. | | | |
|------------------------------|-------|-------|-------|-------|-------|-------|------|------|-----------------|-----------------|-----------------|--|
| | | | | | | | | | 3 U | 3 U | 6 U | |
| Board depth 160 mm | | | | | | | | | | | | |
| 6 | 32.2 | - | 20.3 | 27.5 | - | 171.5 | 122 | 167 | 3653.000 | - | - | |
| 8 | 40.3 | - | 30.5 | 36.0 | - | 171.5 | 122 | 167 | - | 3653.010 | - | |
| 10 | 50.5 | 35.6 | 40.6 | 46.2 | - | 171.5 | 122 | 167 | - | 3653.020 | 3653.100 | |
| 12 | 60.6 | 45.7 | 50.8 | 56.4 | - | 171.5 | 122 | 167 | - | 3653.030 | 3653.110 | |
| 14 | 70.8 | 55.9 | 60.9 | 66.5 | - | 171.5 | 122 | 167 | - | 3653.040 | 3653.120 | |
| 21 | 106.3 | 91.4 | 96.4 | 102.0 | 86.3 | 171.5 | 122 | 167 | - | 3653.050 | 3653.130 | |
| 28 | 141.9 | 127.0 | 132.0 | 137.6 | 121.8 | 171.5 | 122 | 167 | - | 3653.060 | 3653.140 | |
| 42 | 213.1 | 198.1 | 203.2 | 208.8 | 193.0 | 171.5 | 122 | 167 | - | 3653.070 | 3653.150 | |
| Board depth 220 mm | | | | | | | | | | | | |
| 10 | 50.5 | 35.6 | 40.6 | 46.2 | - | 231.5 | 182 | 227 | - | 3653.200 | 3653.300 | |
| 12 | 60.6 | 45.7 | 50.8 | 56.4 | - | 231.5 | 182 | 227 | - | 3653.210 | 3653.310 | |
| 14 | 70.8 | 55.9 | 60.9 | 66.5 | - | 231.5 | 182 | 227 | - | 3653.220 | 3653.320 | |
| 21 | 106.3 | 91.4 | 96.4 | 102.0 | 86.3 | 231.5 | 182 | 227 | - | 3653.230 | 3653.330 | |
| 28 | 141.9 | 127.0 | 132.0 | 137.6 | 121.8 | 231.5 | 182 | 227 | - | 3653.240 | 3653.340 | |
| 42 | 213.1 | 198.1 | 203.2 | 208.8 | 193.0 | 231.5 | 182 | 227 | - | 3653.250 | 3653.350 | |
| Supply includes | | | | | | | | | | | | |
| Front panel | | | | | | | | | 1 | 1 | 1 | |
| Handle | | | | | | | | | 1 | 1 | 2 | |
| Side panel | | | | | | | | | 1 | 2 | 2 | |
| Cover plate incl. rear panel | | | | | | | | | 1 | - | - | |
| Rear panel | | | | | | | | | - | 1 | 2 | |
| PCB holder | | | | | | | | | 2 | 2 | 2 | |
| Assembly parts (set) | | | | | | | | | 1 | 1 | 1 | |

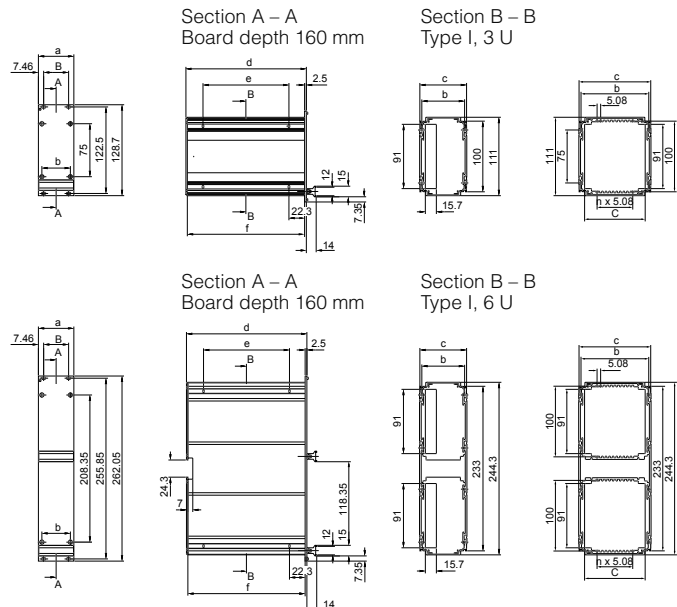

PCB holder for box-type plug-in units



For fastening PCBs in box-type plug-in units.

Material

PBTP,
Basic material to UL 94-V0

Supply includes

Assembly parts

| Packs of | Order No. |
|----------|-----------|
| 2 | 3606.321 |

Guide rails for drive chassis



For routing drive chassis in the subrack.

Material

Aluminium

Supply includes

Press-fit pin


Note

Two guide rails are required for each drive chassis.
Guide rails 4.4" for plastic drives, see page 158

| For installation depth mm | Packs of | Order No. |
|---------------------------|----------|-----------|
| 160 | 1 | 3686.989 |

+ Also required


Assembly screws
packs of 100, order no. 3654.340
see page 202

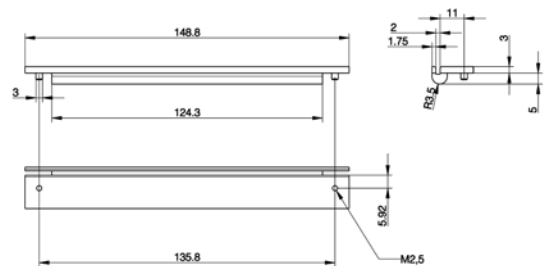

COMPONENTS AND ACCESSORIES

BOX-TYPE PLUG-IN UNITS

HeiPac box-type plug-in units – individual components

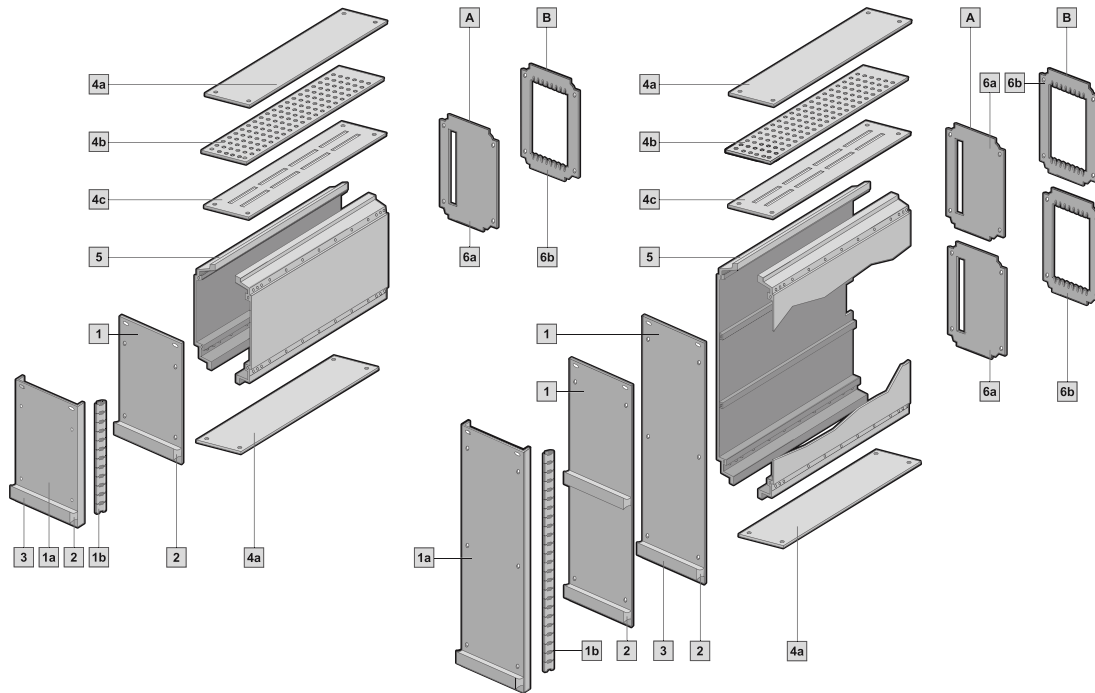


HeiPac box-type plug-in units, types I and II in 3 U and 6 U, individual components

Type I for one connector/type II for several connectors

| Box-type plug-in units, individual components | A Type I | B Type II | Packs of | 8 HP | 10 HP | 12 HP | 14 HP | 21 HP | 28 HP | 42 HP | Page |
|--|-------------|--------------|----------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------|
| Front panels of 2.5 mm aluminium, anodised surface finish | | | | | | | | | | | |
| 1 for 3 U | • | • | 1 | 3685.769 | 3685.629 | 3685.630 | 3685.631 | 3685.636 | 3685.637 | 3685.638 | - |
| for 6 U (for 1 handle) | • | • | 1 | 3685.767 | 3685.633 | 3685.634 | 3685.635 | 3685.639 | 3685.640 | 3685.641 | - |
| for 6 U (for 2 handles) | • | • | 1 | - | 3687.520 | 3687.521 | 3687.522 | 3687.523 | 3687.524 | 3687.525 | - |
| EMC front panels of 2.5 mm aluminium, surface finish clear-chromated (only for use in conjunction with 10 HP box-type plug-in unit) | | | | | | | | | | | |
| 1a for 3 U/10 HP box-type plug-in units | • | • | 1 | - | - | 3687.587 | - | - | - | - | - |
| for 6 U/10 HP box-type plug-in units | • | • | 1 | - | - | 3687.588 | - | - | - | - | - |
| EMC gaskets , vertical, for front panels | | | | | | | | | | | |
| 1b for 3 U | • | • | 1 | - | - | 3686.975 | - | - | - | - | 146 |
| for 6 U | • | • | 1 | - | - | 3686.977 | - | - | - | - | 146 |
| Handle type V | | | | | | | | | | | |
| 2 of aluminium, anodised surface finish | • | • | 1 | 3685.600 | 3685.601 | 3685.602 | 3685.603 | 3685.761 | 3685.762 | 3685.763 | 176 |
| of plastic | • | • | 1 | 3685.492 | - | 3685.493 | - | 3685.494 | - | - | 176 |
| Identification strips | | | | | | | | | | | |
| 3 of 0.5 mm aluminium, anodised surface finish | • | • | 1 | 3685.751 | 3685.752 | 3685.753 | 3685.754 | 3685.755 | 3685.756 | 3685.757 | 177 |
| Covers 4a 4b of 1 mm aluminium, untreated 4c of 1.2 mm sheet steel, painted, RAL 9006 (with vent slots) | | | | | | | | | | | |
| 4a unvented, for board depth 160 mm | • | • | 1 | 3687.555 | 3685.689 | 3685.690 | 3685.691 | 3685.692 | 3685.693 | 3685.694 | - |
| unvented, for board depth 220 mm | • | • | 1 | 3687.562 | 3685.701 | 3685.702 | 3685.703 | 3685.704 | 3685.705 | 3685.706 | - |
| 4b vented, for board depth 160 mm slide-in | • | • | 1 | 3687.585 | 3685.683 | 3685.684 | 3685.685 | 3685.686 | 3685.687 | 3685.688 | - |
| vented, for board depth 220 mm slide-in | • | • | 1 | - | 3685.695 | 3685.696 | 3685.697 | 3685.698 | 3685.699 | 3685.700 | - |
| 4c vent slots for guide rails, for board depth 160 mm | • | • | 1 | - | 3687.556 | 3687.557 | 3687.558 | 3687.559 | 3687.560 | 3687.561 | - |
| vent slots for guide rails, for board depth 220 mm | • | • | 1 | - | 3687.563 | 3687.564 | 3687.565 | 3687.566 | 3687.567 | 3687.568 | - |
| Side panel of extruded aluminium section, anodised surface finish | | | | | | | | | | | |
| 5 3 U, for board depth 160 mm | • | • | 1 | - | - | - | 3685.645 | - | - | - | - |
| 6 U, for board depth 160 mm | • | • | 1 | - | - | - | 3685.648 | - | - | - | - |
| 3 U, for board depth 220 mm | • | • | 1 | - | - | - | 3685.646 | - | - | - | - |
| 6 U, for board depth 220 mm | • | • | 1 | - | - | - | 3685.649 | - | - | - | - |
| Rear panel 6a of 2.0 mm aluminium, untreated 6b of 1.2 mm sheet steel, spray-finished | | | | | | | | | | | |
| 6a for 1 connector | • | - | 1 | 3687.536 | 3685.707 | 3685.708 | 3685.709 | 3685.710 | 3685.711 | 3685.712 | - |
| 6b for several connectors | - | • | 1 | - | - | - | - | 3687.537 | 3687.538 | 3687.539 | - |

Assembly parts for box-type plug-in units, see page 202

HeiPac box-type plug-in units – individual components

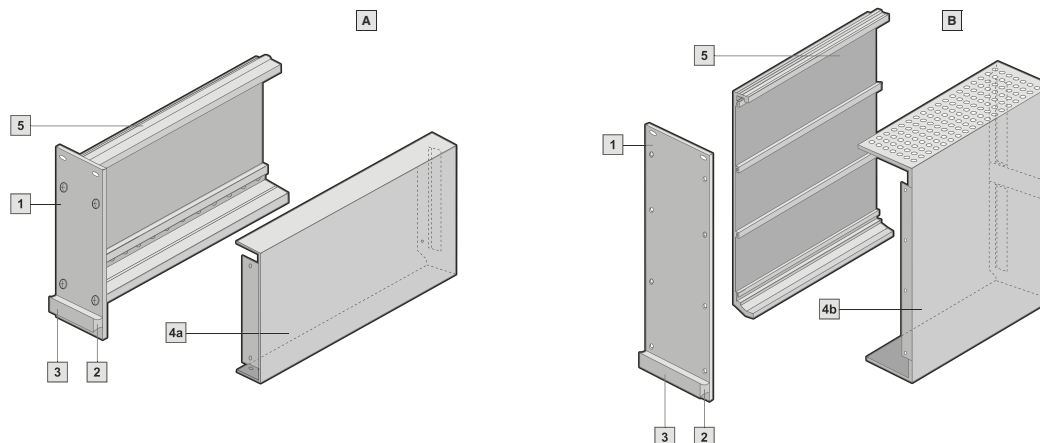

HeiPac box-type plug-in units, types V and VI in 3 U and 6 U, in individual components

Type V with cover (unvented)/type VI with cover (vented)

| Box-type plug-in units, individual components | A Type I | B Type II | Packs of | 6 HP | 7 HP | 8 HP | 10 HP | 12 HP | 14 HP | Page |
|---|-------------|--------------|----------|------|------|------|-------|-------|-------|------|
|---|-------------|--------------|----------|------|------|------|-------|-------|-------|------|

Front panels of 2.5 mm aluminium, anodised surface finish

| | | | | | | | | | | |
|-----------|---|---|---|----------|----------|----------|----------|----------|----------|---|
| 1 for 3 U | • | • | 1 | 3685.768 | 3685.628 | 3685.769 | 3685.629 | 3685.630 | 3685.631 | - |
| for 6 U | • | • | 1 | 3685.766 | 3685.632 | 3685.767 | 3685.633 | 3685.634 | 3685.635 | - |

Handle type V

| | | | | | | | | | | |
|---|---|---|---|----------|----------|----------|----------|----------|----------|-----|
| 2 of aluminium, anodised surface finish | • | • | 1 | 3685.598 | 3685.599 | 3685.600 | 3685.601 | 3685.602 | 3685.603 | 176 |
| of plastic | • | • | 1 | - | - | 3685.492 | - | 3685.493 | - | 176 |

Identification strips for 3 U

| | | | | | | | | | | |
|--|---|---|---|----------|----------|----------|----------|----------|----------|-----|
| 3 of 0.5 mm aluminium, anodised surface finish | • | • | 1 | 3685.749 | 3685.750 | 3685.751 | 3685.752 | 3685.753 | 3685.754 | 177 |
|--|---|---|---|----------|----------|----------|----------|----------|----------|-----|

Cover 4a 4b of 1 mm aluminium, clear-chromated surface finish

| | | | | | | | | | | |
|--|---|---|---|----------|----------|----------|----------|----------|----------|---|
| 4a unvented, 3 U, for board depth 160 mm | • | - | 1 | 3685.774 | 3685.658 | 3685.776 | 3685.659 | 3685.660 | 3685.661 | - |
| unvented, 3 U, for board depth 220 mm | • | - | 1 | 3685.775 | 3685.674 | 3685.777 | 3685.675 | 3685.676 | 3685.677 | - |
| unvented, 6 U, for board depth 160 mm | • | - | 1 | 3685.717 | 3685.662 | 3685.764 | 3685.663 | 3685.664 | 3685.665 | - |
| unvented, 6 U, for board depth 220 mm | • | - | 1 | 3685.718 | 3685.678 | 3685.765 | 3685.679 | 3685.680 | 3685.681 | - |
| 4b vented, 3 U, for board depth 160 mm | - | • | 1 | 3685.770 | 3685.650 | 3685.772 | 3685.651 | 3685.652 | 3685.653 | - |
| vented, 3 U, for board depth 220 mm | - | • | 1 | 3685.771 | 3685.666 | 3685.773 | 3685.667 | 3685.668 | 3685.669 | - |
| vented, 6 U, for board depth 160 mm | - | • | 1 | 3685.713 | 3685.654 | 3685.715 | 3685.655 | 3685.656 | 3685.657 | - |
| vented, 6 U, for board depth 220 mm | - | • | 1 | 3685.714 | 3685.670 | 3685.716 | 3685.671 | 3685.672 | 3685.673 | - |

Side panel of extruded aluminium section, anodised surface finish

| | | | | | | | | | | |
|-------------------------------|---|---|---|--|--|--|----------|--|--|---|
| 5 3 U, for board depth 160 mm | • | • | 1 | | | | 3685.645 | | | - |
| 6 U, for board depth 160 mm | • | • | 1 | | | | 3685.648 | | | - |
| 3 U, for board depth 220 mm | • | • | 1 | | | | 3685.646 | | | - |
| 6 U, for board depth 220 mm | • | • | 1 | | | | 3685.649 | | | - |

Assembly parts for box-type plug-in unit types I, II, V, VI

| Description | for installation of: | Packs of | Order. No. | |
|---|--|----------|------------|-----|
| Assembly kit for box-type plug-in unit I/II, 3 U | Box-type plug-in units, type I/II, 3 U | 1 set | 3687.589 | - |
| Assembly kit for box-type plug-in unit I/II, 6 U | Box-type plug-in units, type I/II, 6 U | 1 set | 3687.590 | - |
| Assembly kit for box-type plug-in unit type V/VI | Box-type plug-in units, type V/VI | 1 set | 3685.294 | - |
| Assembly kit for box-type plug-in unit with EMC front panel | Box-type plug-in unit with EMC front panel | 1 set | 3687.591 | - |
| Assembly kit for plastic handles | Plastic handles on box-type plug-in units | 1 set | 3687.519 | 202 |


Guide rails for box-type plug-in units, see page 158

For more screws, see page 202

COMPONENTS AND ACCESSORIES


CLIMATE CONTROL

Vertical cooling from bottom to top



- Air flow via normal convection or forced cooling devices in the enclosure or housing outside of the subrack
- Vertical forced air flow, supported by fans installed at the bottom of the subrack (1 U)

Fan mounting plate

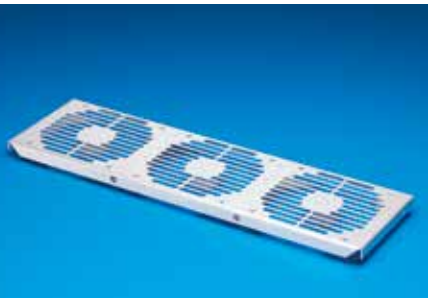

For the installation of 120 mm fans and filter modules in 4 U and 7 U subracks.
For mounting on the subrack side panels.

Material



1.5 mm aluminium, anodised

| U | For PCB depth mm | No. of fan mounting plates required | HP | Order No. |
|---|------------------|-------------------------------------|----|-----------------|
| 1 | 160 | 1 | 84 | 3684.317 |
| | 220 | 1 | | |
| | 280 | 2 | | |
| | 340 | 2 | | |
| | 400 | 3 | | |


+ Also required

1 terminal block is required for each subrack.

| Packs of | Order No. |
|----------|-----------------|
| 1 | 3686.805 |

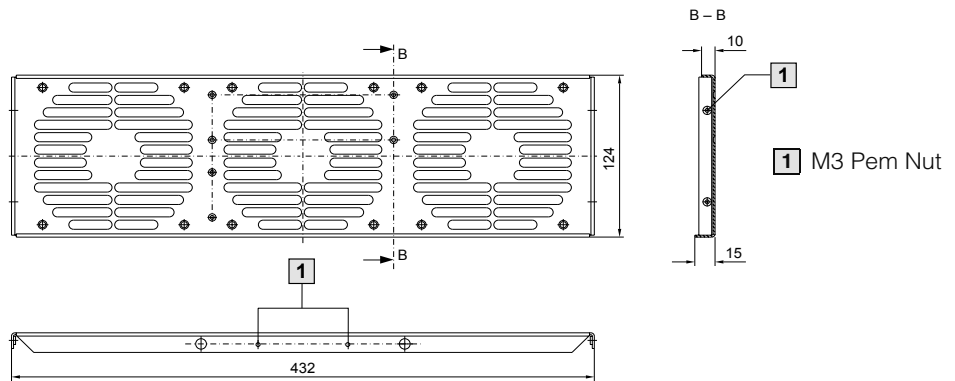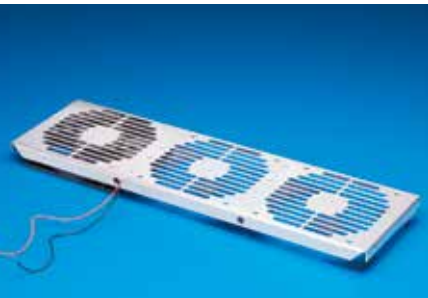

Diagonal cooling from front to back



Diagonal air flow from front to back allows individual cooling of PCBs in vertical installation position. An air baffle and air partition ensure controlled air flow.

- 1 Air baffle, see page 187
- 2 Fan (mounted on the rear panel), see page 190
- 3 Air partition, see page 187

Air baffle





For controlled air flow in 7 U subracks. For mounting on sub-rack side panels with the aid of mounting blocks.

Material
1 mm Aluminium

Supply includes
Assembly parts

| Subrack depth mm | Order No. |
|------------------|-----------------|
| 285 | 3685.302 |
| 345 | 3685.303 |
| 405 | 3684.320 |
| 465 | 3684.321 |
| 525 | 3684.322 |



Air partition





For controlled air flow in the sub-rack. The partitions are mounted on the horizontal rails together with the backplanes.

Material
Epoxy

| Height U | Order No. |
|----------|-----------------|
| 1/2 | 3684.870 |
| 1 | 3684.871 |
| 3 | 3684.872 |

+ Also required

Fastening screws and washers
packs of 100, order no. 3684.019
see page 202




Front/rear panels for ventilation



Non-EMC version

Material
2.5 mm Aluminium

Surface finish
Anodised




Non-EMC version

| U | HP | Packs of | Order No. |
|---|----|----------|-----------------|
| 1 | 84 | 1 | 3684.812 |
| 2 | 84 | 1 | 3684.813 |
| 3 | 84 | 1 | 3684.814 |

+ Also required

Screws and collars, packs of 100 sets,
Order no. 3658.160
see page 202



EMC version

Material
2.5 mm Aluminium

Surface finish
Clear-chromated


Supply includes
1 front panel
1 contact strip
1 gasket strip
1 vertical EMC gasket
Assembly parts

EMC version

| U | HP | Packs of | Order No. |
|---|----|----------|-----------------|
| 1 | 84 | 1 | 3684.281 |
| 2 | 84 | 1 | 3684.282 |
| 3 | 84 | 1 | 3684.283 |

+ Also required


Centering screws
see page 203



COMPONENTS AND ACCESSORIES

CLIMATE CONTROL

Rear panels for fan installation

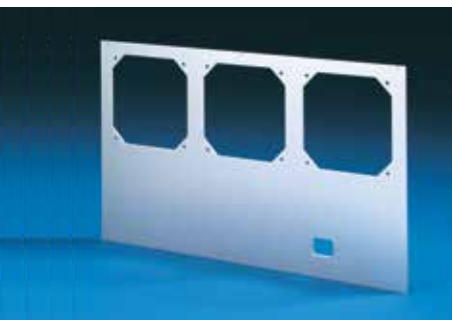

Non-EMC version

Material
2.5 mm Aluminium

Surface finish
Anodised

Non-EMC version

| U | HP | For fans mm | Packs of | Order No. |
|---|----|-------------|----------|-----------------|
| 3 | 85 | 80 | 1 | 3684.839 |
| 4 | 85 | 80 | 1 | 3684.840 |
| 6 | 85 | 120 | 1 | 3684.841 |
| 7 | 85 | 120 | 1 | 3684.842 |

+ Also required

Screws and collars
packs of 100 sets, order no. 3658.160
see page 202

EMC version

Material
2.5 mm Aluminium

Surface finish
Clear-chromated

Supply includes
1 rear panel
1 contact strip
1 gasket strip
1 vertical EMC gasket
assembly parts

EMC version



| U | HP | For fans mm | Packs of | Order No. |
|---|----|-------------|----------|-----------------|
| 3 | 84 | 80 | 1 | 3684.284 |
| 4 | 84 | 80 | 1 | 3684.285 |
| 6 | 84 | 120 | 1 | 3684.286 |
| 7 | 84 | 120 | 1 | 3684.287 |

+ Also required

Centering screws
see page 203

+ Accessories

Fans
see page 190

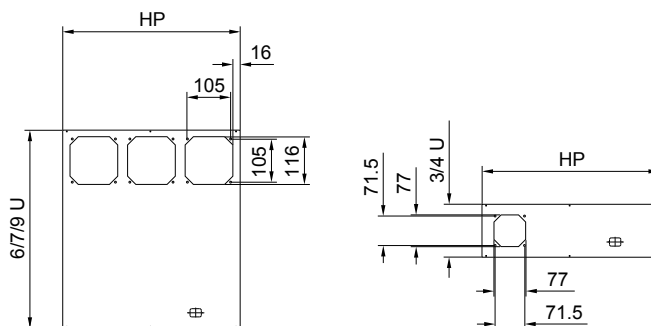

Rear panels, horizontally hinged for fan installation



Non-EMC version

Material
2.5 mm Aluminium

Surface finish
Anodised

Supply includes
1 rear panel
1 set of hinges
assembly parts

Non-EMC version

| U | HP | For fans mm | Packs of | Order No. |
|---|----|-------------|----------|-----------------|
| 3 | 85 | 80 | 1 | 3684.304 |
| 4 | 85 | 80 | 1 | 3684.305 |
| 6 | 85 | 120 | 1 | 3684.306 |
| 7 | 85 | 120 | 1 | 3684.307 |

+ Also required

Screws and collars
packs of 100 sets, order no. 3658.160
see page 202

EMC version

Material
2.5 mm Aluminium

Surface finish
Clear-chromated

Supply includes
1 rear panel
1 contact strip
1 gasket strip
1 vertical EMC gasket
1 set of hinges
assembly parts

EMC version



| U | HP | For fans mm | Packs of | Order No. |
|---|----|-------------|----------|-----------------|
| 3 | 84 | 80 | 1 | 3684.311 |
| 4 | 84 | 80 | 1 | 3684.312 |
| 6 | 84 | 120 | 1 | 3684.313 |
| 7 | 84 | 120 | 1 | 3684.314 |

+ Also required

Centering screws
see page 203

+ Accessories

Fans
see page 190

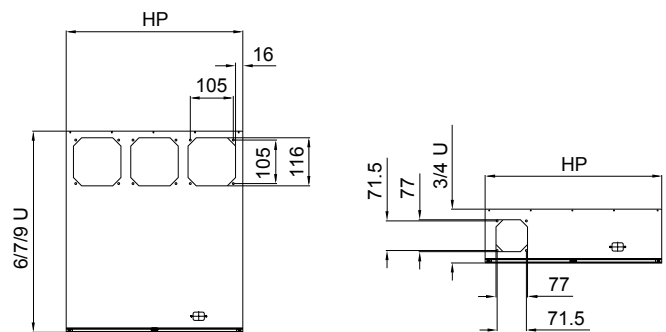

COMPONENTS AND ACCESSORIES

CLIMATE CONTROL

AC fans



For subracks and microcomputer systems

Supply includes

1 fan without connection cable

+ Also required


Assembly screws
packs of 1 set, order no. 3685.197
see page 203

AC fans

| Dimensions | | | Bearing | Rated voltage V/Hz | Power Watts | Noise level dB(A) | Temperature range °C | Volume flow m ³ /h | Order No. |
|------------|-------|-------|--------------|--------------------|-------------|-------------------|----------------------|-------------------------------|-----------------|
| Fan mm | A mm | B mm | | | | | | | |
| 80 | 79.5 | 71.5 | Ball bearing | 115/60 | 11.0 | 42 | -40 bis +95 | 57 | 3686.645 |
| 80 | 79.5 | 71.5 | Ball bearing | 230/50 | 12.0 | 37 | -40 bis +90 | 48 | 3686.646 |
| 120 | 119.0 | 104.8 | Ball bearing | 115/60 | 18.0 | 51 | -40 bis +90 | 180 | 3686.643 |
| 120 | 119.0 | 104.8 | Ball bearing | 230/50 | 19.0 | 47 | -40 bis +85 | 160 | 3686.644 |

Connection cable

| Cable length mm | Packs of | Order No. |
|-----------------|----------|-----------------|
| 610 | 1 | 3686.658 |
| 1000 | 1 | 3686.659 |

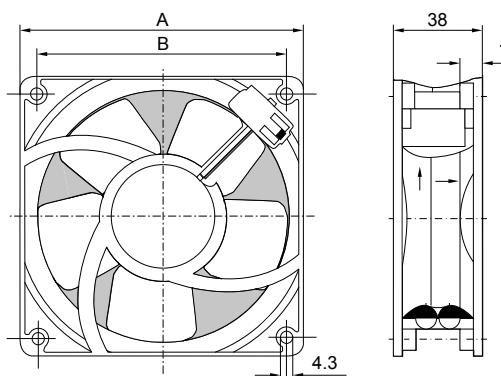

DC fans



Optionally available with temperature-dependent speed control via additional temperature sensor.

Supply includes

1 fan with connection cable (310 mm)

+ Also required


Assembly screws
 packs of 1 set, order no. 3685.197
 see page 203
 Temperature sensor for DC fans with speed control
 see page 192

DC fan with speed control and alarm signal

| Dimensions | | | Bearing | Rated voltage V (DC) | Voltage range Volt | Power Watt | Noise level dB(A) | Temperature range °C | Volume flow m ³ /h | Order No. |
|------------|-------|-------|--------------|----------------------|--------------------|------------|-------------------|----------------------|-------------------------------|-----------------|
| Fan mm | A mm | B mm | | | | | | | | |
| 80 | 79.5 | 71.5 | Ball bearing | 12 | 8,0 - 14,0 | 2,2 | 34 | -20 bis +65 | 48 | 3686.649 |
| 80 | 79.5 | 71.5 | Ball bearing | 24 | 21,6 - 26,4 | 2,4 | 36 | -20 bis +65 | 54 | 3686.650 |
| 120 | 119.0 | 104.8 | Ball bearing | 12 | 8,0 - 13,2 | 5,5 | 45 | -20 bis +65 | 170 | 3686.647 |
| 120 | 119.0 | 104.8 | Ball bearing | 24 | 21,0 - 27,0 | 5,4 | 45 | -20 bis +65 | 170 | 3686.648 |

DC fan without speed control and without alarm signal

| Dimensions | | | Bearing | Rated voltage V (DC) | Voltage range Volt | Power Watt | Noise level dB(A) | Temperature range °C | Volume flow m ³ /h | Order No. |
|------------|-------|-------|--------------|----------------------|--------------------|------------|-------------------|----------------------|-------------------------------|-----------------|
| Fan mm | A mm | B mm | | | | | | | | |
| 80 | 80.0 | 71.5 | Ball bearing | 12 | 6,0 - 15,0 | 1,8 | 34 | -20 bis +75 | 48 | 3687.612 |
| 80 | 80.0 | 71.5 | Ball bearing | 24 | 12,0 - 28,0 | 2,1 | 34 | -20 bis +75 | 48 | 3687.613 |
| 120 | 119.0 | 104.8 | Ball bearing | 12 | 6,0 - 15,0 | 2,6 | 39 | -20 bis +75 | 140 | 3687.614 |
| 120 | 119.0 | 104.8 | Ball bearing | 24 | 12,0 - 28,0 | 2,6 | 39 | -20 bis +75 | 140 | 3687.615 |

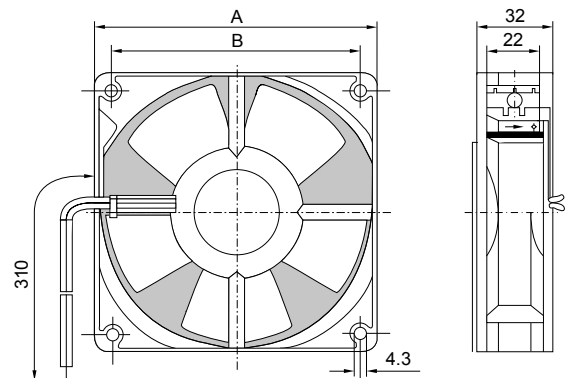

COMPONENTS AND ACCESSORIES



CLIMATE CONTROL

Temperature sensor



For DC fans 12/24 V with speed control

| Voltage | Packs of | Order No. |
|----------------|----------|-----------------|
| 12 V/24 V (DC) | 1 | 3686.657 |

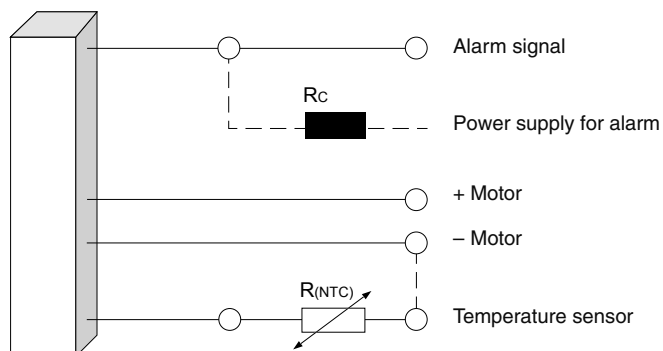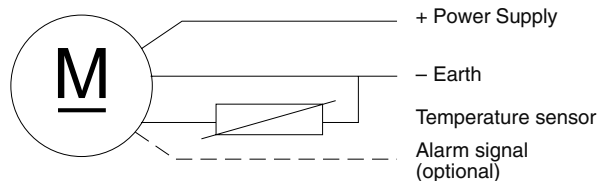

Finger guard



For AC fans and DC fans

Material


Polyamide
Self-extinguishing to UL 94-V0

Colour

Black

| For fans mm | Packs of | Order No. |
|-------------|----------|-----------------|
| 80 | 1 | 3686.656 |
| 120 | 1 | 3686.655 |

EMC shielding plate

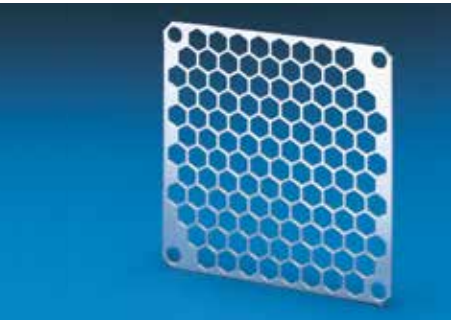


For AC fans and DC fans

Material

1 mm aluminium
Clear-chromated

| For fans mm | Packs of | Order No. |
|-------------|----------|-----------------|
| 80 | 1 | 3686.359 |
| 120 | 1 | 3686.329 |

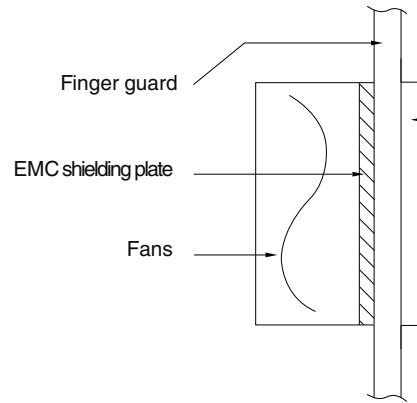

Air block panel for unused slots



To conceal unused slots and prevent unwanted airflow. The air block panel simply snaps into position on the guide rails.

Material

Polycarbonate
Self-extinguishing to UL 94-V0

Colour

Blue

Note

Not suitable for use in conjunction with guide rails with 1/2 HP offset.

| For keyable guide rail mm | Packs of | Order No. |
|---------------------------|----------|-----------------|
| 160 | 1 | 3687.924 |



COMPONENTS AND ACCESSORIES

POWER SUPPLIES

Maximum performance with efficient power supply

HEITEC offers an extensive range of power supply units in various designs:

The range includes 482.6 mm (19") compatible, Open Frame and PS/2 variants to supply DC voltage to controllers, systems and plant in many different areas.



- Open Frame (VME)
- 3 U, 6 U (VME), plug-in
- 3 U, 6 U (CPCI), plug-in
- PS/2 (AT/ATX)
- UPS

Open Frame (VME)



E.g. 400 Watt

Order no. see page 196

Applications

Power supplies for VMEbus systems


Technical specifications

- 400 Watt
- Open frame version
- For installing on mounting base or rear panel
- Built-in fans
- Wide-range input
- Aluminium case
- 3 outputs

Benefits at a glance

- Small size with high power output
- All-purpose model
- Approvals: EN 60 950, UL 1950, IEC 950 and CSA 22.2 No. 234
- Compact design

3 U, 6 U, plug-in (VME)

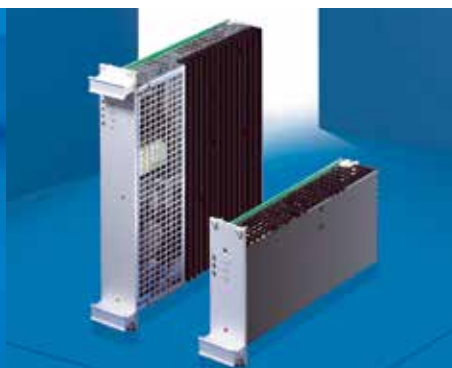

E.g. 130, 160, 270 Watt

Order no. see page 197

Applications

Plug-in power supply for VMEbus systems with integrated VMEbus signalling


Technical specifications

- 130, 160, 270 Watt
- 482.6 mm (19") rack-mount unit to IEC 60 297-3
- Installation depth 160 mm
- Mounted by guide rails
- Connection via connectors H15, IEC 60 603-2
- 3 outputs

Benefits at a glance

- 482.6 mm (19") compatible
- Easily exchangeable
- Approvals: EN 60 950, VDE 0805 and IEC 950

3 U, 6 U, plug-in (CPCI)

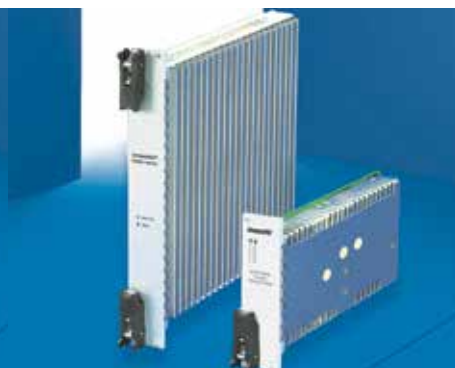

Z.B. 250, 350 Watt

Order no. see page 198

Applications

Plug-in power supply for CompactPCI systems

Technical specifications

- 250, 350 Watt
- 482.6 mm (19") rack-mount unit to IEC 60 297-3
- Installation depth 160 mm
- Mounted by guide rails
- Connection via connectors type Positronic, 47-pole PICMG 2.9
- 4 outputs

Benefits at a glance

- 482.6 mm (19") compatible
- Easily exchangeable
- Approvals: EN 60 950 A1-A4, CSA 22.2, UL 1950, CE
- Conforms to PICMG specification

PS/2 (AT/ATX)



E.g. 250, 300, 400 Watt

Order no. see page 199

Applications

Power supply unit for ATX- and CPCI systems

Technical specifications

- 250, 300, 400 Watt
- Open frame version
- For installing on mounting base or rear panel
- Built-in fan
- Sheet steel case
- PFC active/passive

Benefits at a glance

- All-purpose model
- Approvals: CSA

Redundant




E.g. 2 x 300 Watt

Redundant power supply units on request

COMPONENTS AND ACCESSORIES



POWER SUPPLIES

HeiPac power supplies – Open Frame

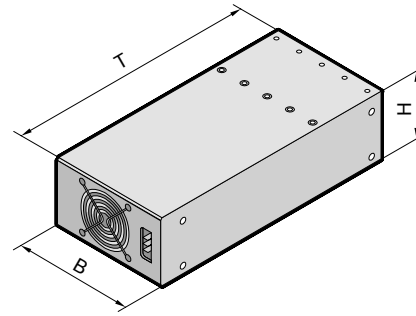


| | | | |
|---|--------------------------|----------|--------|
| | 400 W | | |
| Height (H) mm | 63.0 | | |
| Width (B) mm | 126.5 | | |
| Depth (T) mm | 279.0 | | |
| Order No. | 3686.629 | | |
| Output sizes | | | |
| Output | 1 | 2 | 3 |
| Output voltage | 5 V | + 12 V | - 12 V |
| Output current | 85 A | 8 A | |
| Maximum power output | 400 W | | |
| Setting range of output voltage | 2.5 V - 5.7 V (85 A) | 5 - 16 V | |
| Load compensation (load variation 0 - 100 %) | < 0.5 % | | |
| Line regulation ($U_{e \text{ min.}} - U_{e \text{ max.}}$) | < 25 mV | < 60 mV | |
| Base load | - | | |
| Infeed compensation (Sense) | 0,5 V | - | |
| Residual ripple (max.) | 1 % | 2 % | |
| Temperature coefficient | 0.03 % / °C | | |
| Overvoltage protection | yes | | |
| Overload protection ¹⁾ | Thermal current limiting | | |
| Overload protection, thermal | - | | |
| Overload protection, electronic | - | | |
| Input variables | | | |
| Mains voltage U_e | 90 - 264 V AC | | |
| Mains frequency | 47 - 63 Hz | | |
| Power factor | > 0.95 | | |
| Startup current limitation | < 50 A | | |
| Efficiency (typ.) | 75 % | | |

HeiPac power supplies for VME, plug-in

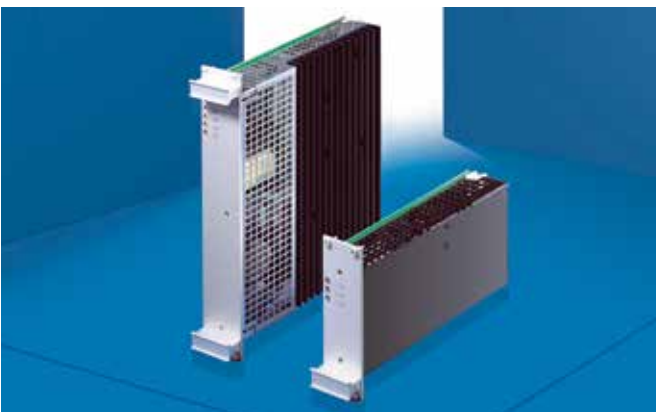

1

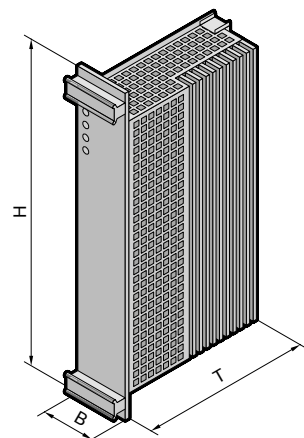



2

| | 1 | | | 2 | | |
|--|--|--------------|---------|---|-----------------|-----------|
| Height (H) | 3 U | | | 6 U | | |
| Width (B) | 10 HP | | | 8 HP | 12 HP | |
| Depth (T) mm | 170.0 | | | 170.0 | 170.0 | |
| Order No. power supply | 3686.469 | | | 3686.471 | 3685.306 | |
| Order No. front panel | 3685.304 | | | 3686.472 | 3685.307 | |
| Output sizes | | | | | | |
| Output | 1 | 2 | 3 | 1 | 2 | 3 |
| Output voltage | 5 V | + 12 V | - 12 V | 5 V | + 12 V | - 12 V |
| Output current 3 U, 10 HP/6 U, 8 HP | 14 A | 5 A | 2 A | 20 A | 5 A | 2 A |
| Output current 3 U, 12 HP/6 U, 12 HP | - | - | - | 35 A | 6 A | 2 A |
| Maximum power output | 130 W | | | 160 W (8 HP), 270 W (12 HP) | | |
| Setting range of output voltage | ± 5 % | - | - | ± 5 % | - | - |
| Load compensation (load variation 0 - 100 %) | < 0.1 % | < 1 % | - | < 0.1 % | < 1 % | - |
| Line regulation ($U_{e \text{ min.}} - U_{e \text{ max.}}$) | < 0.2 % | | | < 0.2 % | | |
| Base load | - | | | - | | |
| Compensation time | < 1 ms at I_a 20 - 80 % | | | < 1 ms at I_a 20 - 80 % | | |
| Infeed compensation (Sense) | ± 0.25 V | - | - | ± 0.25 V | - | - |
| Residual ripple (max.) | < 35 mV | | < 20 mV | < 45 mVss | < 30 mVss | < 15 mVss |
| Interference voltage | 50 mVss typ. (bandwidth 20 MHz) | | | < 80 mVss typ. (sum of all interference parts) | | |
| Temperature coefficient | 0.025 % / K | | | 0.025 % / K | | |
| Overvoltage protection (automatically recovery) | 125 % ± 5 % | 125 % ± 10 % | | 125 % ± 5 % | 120 % ± 10 % | |
| Overload protection | typ. 110 % $I_{a \text{ rated}}$, U/I characteristic curve acting on all outputs, outputs short circuit-resistant | | | | | |
| Overtemperature protection | Cuts out if the internal temperature is too high, cuts in again with hysteresis | | | | | |
| AC-Fail, SYSRESET | TTL signals with 48 mA drive current, active low | | | | | |
| ON delay | < 0.5 s | | | < 0.5 s | | |
| Ramp-up time | ≤ 50 ms | | | ≤ 50 ms | | |
| Input variables | | | | | | |
| Mains voltage U_e | AC 187 - 264 V, 50/60 Hz with automatic changeover to AC 99 - 138 V | | | AC 187 - 264 V, 50/60 Hz with automatic changeover to AC 99 - 138 V | | |
| Mains frequency | 50 - 60 Hz | | | 50 - 60 Hz | | |
| Efficiency (typ.) | 80 % | | | 80 % | | |
| Startup current limitation | < 10 As typ. - in cold state < 15 As typ. - in warm state | | | < 25 As typ. - in cold state < 35 As typ. - in warm state | | |
| Fuse | 4 AT | | | 8 AT | | |


COMPONENTS AND ACCESSORIES

POWER SUPPLIES

HeiPac power supplies for CPCI, plug-in

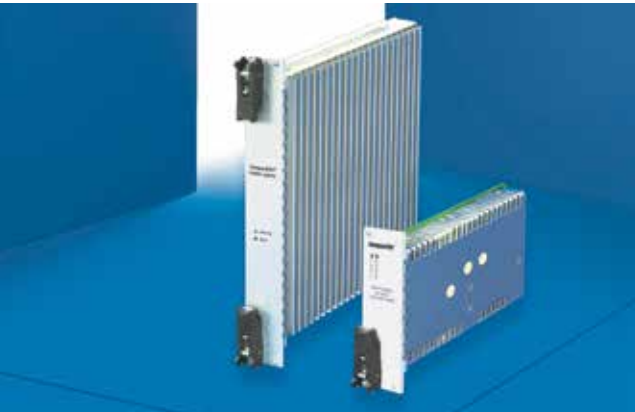

1

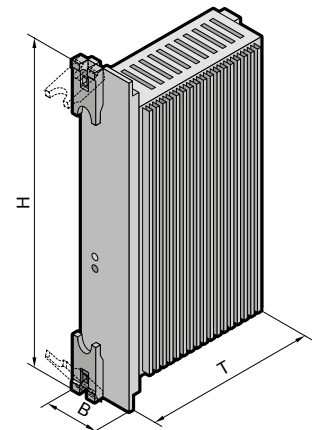

2

| | 1 | 2 |
|--|---|---|
| Height (H) | 3 U | 6 U |
| Width (B) | 8 HP | 8 HP |
| Depth (T) mm | 170.0 | 170.0 |
| Order No. | | |
| AC power supply | 3688.695 | 3688.528 |
| Stromversorgung DC | | |
| DC power supply | | |
| Output sizes | | |
| Output | | |
| Output voltage | U ₁ U ₂ U ₃ U ₄ | U ₁ U ₂ U ₃ U ₄ |
| Output current | 5 V 3,3 V 12 V -12 V | 5 V 3,3 V 12 V -12 V |
| Output current U ₁ and U ₂ | 33 A 33 A 6 A 1 A | 40 A 40 A 9 A 1 A |
| Maximum power output | 55 A max. | 80 A max. |
| Base load (only U ₁) | 250 W | 350 W |
| Load compensation (dyn.) | 5 % - | 5 % |
| Line regulation | < ± 1 % (90s - 264 V AC) | |
| Infeed compensation (Sense) | < ± 1 % (90 -264 V AC) U ₁ , U ₂ , U ₃ | |
| Residual ripple (PARD) | 0.25 V 0.25 V 0.25 V - | 0.25 V 0.25 V 0.25 V - |
| Temperature coefficient | 50 mVss oder 1 % (bandwidth 20 MHz) | |
| Overvoltage protection | < ± 0.02 % / K (0° - 50 °C) after 20 min. start-up time | |
| Overload protection | 125 % ± 10 %, reset by switching on again | |
| Overtemperature protection | Current limiting of all outputs, automatic return at normal load | |
| | At overtemperature switches off all outputs, automatic return at normal temperature | |
| Input variables | | |
| Mains voltage or DC input | 90 - 264 V AC, 47 - 63 Hz, 3.6 A max. | 90 - 264 V AC, 47 - 63 Hz, 7 A |
| Power Factor | 0.99 bei AC 115 V, full load | |
| Starting current | 15 As (115 V AC) cold start, 30 As (230 V AC) cold start | |
| Fuse | 4 A, 250 V AC | 10 A, 250 V AC |
| Signals and control cables | | |
| Power Fail (Pin 42) | In the event of a mains failure > 4 ms before output voltages exit control range. Power fail also triggered by failure or under-voltage of V1 or V2 (3 U) or any output (6 U) | |
| DEG (Pin 38) | In case of overtemperature | - |
| Remote Enable | Use logic „0“ (TTL level) | |
| Remote inhibit | Use logic „1“ (TTL level) | |
| LED displays, two-colour | Green: "Power ON" and output voltages present Red: Error | |

AT/ATX power supply



For ATX

- PS/2 model
- Built-in fan
- Short circuit-protected
- CSA-approved
- On/off switch
- PFC active/passive
- W x H x D = 86 x 150 x 140 mm
- 47 – 63 Hz

Supply includes

Connection cable

| Design | Power | Packs of | Order No. |
|--------|-------|----------|-----------------|
| AT | 300 W | 1 | 3688.118 |
| ATX | 400 W | 1 | 9916.222 |

Technical specifications

| 3688.118 | 9916.222 |
|-----------------------|-----------------------------------|
| 300 W max. / 230 V AC | 400 W max. / 90 - 240 V AC |
| 5.0 V / 30.0 A | 3.3 V / 20.0 A |
| - 5.0 V / 0.5 A | 5.0 V / 20.0 A |
| 12.0 V / 12.0 A | - 5.0 V / 0.3 A |
| - 12.0 V / 0.5 A | 12.0 V / 32 A |
| PFC passive | - 12.0 V / 32 A |
| | + 5 VSB / 2.5 A |
| | 3.3 V u. 5 V plus max. 150 W |
| | 3.3 V, 5 V & 12 V plus max. 385 W |
| | PFC active |

ATX power supply 1 U



For ATX

- 2 built-in fans
- Short circuit-protected
- On/off switch
- PFC active
- W x H x D = 85 x 40 x 230 mm

Supply includes

Connection cable

| Design | Packs of | Order No. |
|--------|----------|-----------------|
| ATX | 1 | 3688.130 |

Technical specifications

| 3688.130 |
|--------------------------------|
| 250 W max. / 90 - 264 V AC |
| 47 - 63 Hz |
| 3.3 V / 16.0 A |
| 5.0 V / 18.0 A |
| - 5.0 V / 0.3 A |
| 12 V / 18 A |
| - 12 V / 0,8 A |
| + 5 VSB / 2.5 A |
| + 3.3 V u. 5 V plus max. 120 W |

COMPONENTS AND ACCESSORIES

POWER SUPPLIES

Front panel



For ATX power supply
Front panel with cut-outs for mounting the
ATX power supply units in the subrack.


Material

Aluminium
Clear-chromated

Supply includes

Assembly parts
EMC gaskets (with EMC version)

| U | HP | Order No. | |
|---|----|-----------------|-----------------|
| | | EMC | Non-EMC |
| 3 | 42 | 3685.331 | 3685.328 |
| 6 | 21 | 3685.332 | 3685.329 |

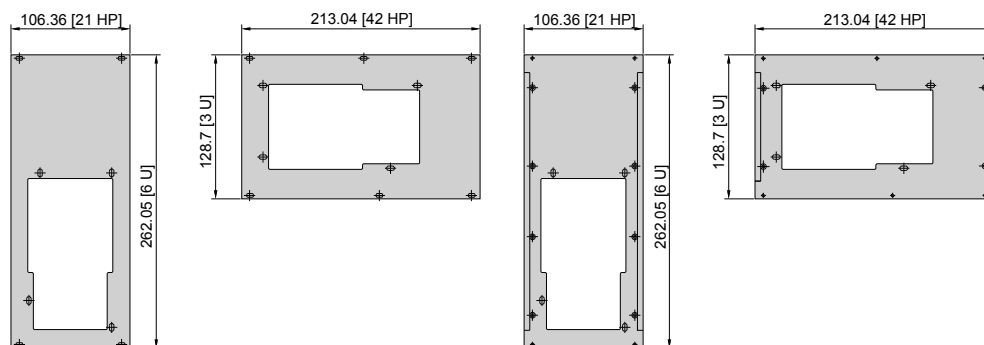

Mounting base for power supplies



- For ATX
- Attaches to the subrack side panel


Material

2 mm Aluminium
Clear-chromated

Supply includes

Assembly parts

| Width (B) mm | Depth (T) mm | Order No. |
|--------------|--------------|-----------------|
| 431.8 | 100 | 3684.323 |
| 431.8 | 130 | 3684.324 |

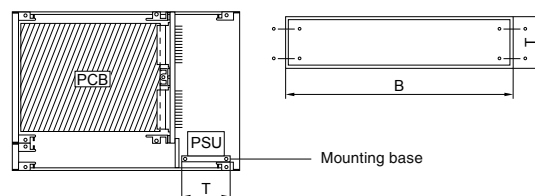

Female connector type M24/8



IEC 60 603-2

- Female connector for plug-in CPCI power supplies
- Quality level 2 to IEC 60 603-2 (DIN 41 612)
- Optional 20 A high current contacts for straight conductor connection either crimp or solder
- Volume resistance max. 1.5 mΩ
- Max. rated current: 40 A

Supply includes

5 connection sockets (crimping or soldering method)

| Type of connection | Packs of | Order No. |
|--------------------|----------|-----------------|
| Soldering | 1 set | 3687.665 |
| Crimping | 1 set | 3687.666 |




















+ Also required

For mounting in the subrack, a Z rail is required see page 144



























COMPONENTS AND ACCESSORIES

ASSEMBLY PARTS

Assembly parts

| For the attachment of | Description | Dimensions | Order No. | Packs of |
|---|--|---|-----------------|----------|
| Front panels to unit side panels | Oval csk-screw ISO 7047-4.8-Z-A2K | M3 x 8  | 3606.550 | 100 |
| Rear panels to box-type plug-in units | Panhead screw ISO 7045-4.8-Z-A2K | M3 x 8  | 3606.560 | 100 |
| PCB holders (plastic) to front panels, top | Oval csk-screw ISO 7047-4.8-Z-A2K | M2.5 x 10  | 3606.610 | 100 |
| - Horizontal rails to side panels - Divider panels to horizontal rails - Horizontal rails to vertical supports | Panhead self-locking screw similar to DIN ISO 7045-8.8-Z-A2K | M4 x 12  | 3654.300 | 100 |
| Front/rear horizontal rails for side panels (HeiPac EASY) | Drill screw, T20, self-locking | M4 x 16 | 3634.430 | 100 |
| Centre horizontal rails for side panels (HeiPac EASY) | Fastening screw, T20, self-locking | M4 x 12 | 3634.435 | 100 |
| - PCBs to PCB holders (die-cast for 3 U), top - PCBs to extractor handles with 6 U | Panhead posidrive screw ISO 7045-4.8-Z-A2K | M2.5 x 8  | 3654.320 | 100 |
| - PCB holder (plastic) to type V/VI handles, bottom - PCBs to PCB holders (plastic) - Backplanes to threaded inserts | Panhead posidrive screw ISO 7045-4.8-Z-A2K | M2.5 x 10  | 3654.330 | 100 |
| - Connectors to Z rails - Z rails to horizontal rails - Type V/VI handles to partial front panels, bottom right for 5 HP - Aluminium guide rails to horizontal rails - Mezzanine front panels | Panhead posidrive screw ISO 7045-4.8-Z-A2K | M2.5 x 6  | 3654.340 | 100 |
| Aluminium guide rails to horizontal rails (fastening of square nuts) | Retaining cage | M2.5 | 9901.417 | 100 |
| Handle type V (plastic) to front panels and box-type plug-in units | Mounting kit for type V handle (plastic): | | 3687.519 | 1 set |
| | Cover black Cover grey Hex nut Screw Screw Square nut DIN 562-04-A2K | M2.5 M2.5 x 16 M2.5 x 12 M2.5 | | |
| Connectors to PCBs | Panhead posidrive screw ISO 7045-4.8-Z-A2K | M2.5 x 12  | 3654.350 | 100 |
| Guide rails (plastic) to horizontal rails | Screw for plastic WN 1413 | M2.2 x 6  | 3654.360 | 100 |
| - Flat front panels to handles type V, VI - Aluminium guide rails to horizontal rails | Square nut DIN 562-A2K | M2.5  | 3654.370 | 100 |
| - Flat front panels to horizontal rails - Trim frame to conceal the front sections of the horizontal mounting kit | Captive screws (cheese-head) and plastic collars | M2.5 x 11  | 3658.160 | 100 sets |
| Flat front panels | Plastic collars |  | 3687.021 | 100 |
| PCB to type III handle | Screw for plastic WN 1412 | 3.0 x 8  | 3658.190 | 100 |
| - PCBs to PCB holders (plastic) - PCB holders to front panels, top | Hex nut ISO 4032-8 | M2.5  | 3658.210 | 100 |
| - Backplanes to threaded inserts - Air partitions to horizontal rails | Mounting kit for backplanes: | | 3684.019 | 100 |
| | Panhead posidrive screw ISO 7045-4.8-Z-A2K | M2.5 x 6  | | |
| | Washer PE, natural DIN 125 | 2.7  | | |
| - Covers to mounting blocks - EMC contact strips | Flat csk-screw ISO 7046-1-4.8-Z-A2K | M3 x 6  | 3684.233 | 100 |
| Covers to side panels (Heipac Vario) | Mounting block |  | 3684.234 | 10 |
| Type V/VI handle to front panels | Bracket |  | 3684.435 | 100 |
| Ground contact to keyable guide rails | Fastening screw for ground contact | 3.5 x 12 | 3684.109 | 50 |
| Female connector to PCB attachment | Pop rivet DIN 7340-B-CuZn | 2.5 x 0,3 x 10 | 3684.482 | 100 |

Assembly parts

| For the attachment of | Description | Dimensions | Order No. | Packs of |
|---|--|---|-----------------|----------|
| Fans to fan mounting plate | Mounting kit for fans: | | | |
| | Flat csk-screw ISO 7046-1-4.8-Z-A2K | M4 x 12  | 3685.197 | 1 set |
| | Hex nut ISO 4032-8 | M4  | | |
| Serrated washer DIN 6798-A-Fst-A2K | 4.3  | | | |
| Covers to side panels | Mounting kit for covers: | | | |
| | Mounting block Flat csk-screw ISO 7046-1-4.8-Z-A2K |  M3 x 6  | 3685.256 | 24 sets |
| PCB holders (die-cast) to front panels, top | Oval csk-screw DIN ISO 7047-4.8-Z-A2K | M2.5 x 8  | 3685.282 | 100 |
| - Covers box-type plug-in units type I/II - Contact/spring sections for 3-part front panels | Flat csk-screw ISO 7046-1-4.8-Z-A2K | M2.5 x 5  | 3685.289 | 100 |
| - Handles on front panels for box type plug-in units - Front panels to hinge strip | Flat csk-screw ISO 7046-1-4.8-Z-A2K | M2.5 x 6  | 3685.290 | 100 |
| Holder (horizontal assembly kit) to horizontal rail | Flat csk-screw similar to DIN ISO 7046-1-4.8-Z-A2K | M2.5 x 5  | 3686.916 | 100 |
| Holder (horizontal assembly kit) to horizontal rail | Flat csk-screw similar to DIN ISO 7046-1-4.8-Z-A2K | M2.5 x 8  | 3686.917 | 100 |
| Contact and spring sections on 3-part front panels without countersink | Panhead posidrive screw DIN ISO 7046-4.8-Z-A2K | M2.5 x 5  | 3686.924 | 100 |
| Set back flanges to side panels | Mounting kit for set back flanges: | | | |
| | Panhead self-locking screw similar to DIN ISO 7045-8.8-Z-A2K | M4 x 8  | 3687.015 | 4 sets |
| | Hex nut ISO 4032-8 | M4  | | |
| Washer | 4.3  | | | |
| Fastening the threaded inserts in horizontal rails | Grub screw ISO 7434-14H | M2.5 x 8  | 3687.020 | 100 |
| - EMC front panels to horizontal rails - EMC trim frame to conceal the front sections of the horizontal mounting kit | Centering screw, slotted | M2.5 x 11  | 3687.050 | 100 |
| EMC front panels to horizontal rails | Centering screw, posidrive | M2.5 x 11  | 3687.051 | 100 |
| EMC front panels to horizontal rails | Centering screw, hex screws | M2.5 x 11  | 3688.709 | 100 |
| Subracks into racks | Panhead screw, posidrive ISO ISO7045-M6x16-4.8-Z-A2K Washer plastic M6 | M6 x 16  | 2089.000 | 100 |
| Subracks into racks | Panhead screw, Torx drive ISO 14583 M6x16-4.8-A2K Washer plastic M6 | M6 x 16  | 7094.600 | 100 |
| Subracks at the profiles of racks | Cage nut M6 0,8-2,0 with electrical contact | M6  | 2094.200 | 50 |
| Subracks at the profiles of racks | Cage nut M6 0,8-2,0 without electrical contact | M6  | 2092.200 | 50 |
| Front panels and rear panels to horizontal rails | Collar screw, cheese-head, slotted | M2.5 x 11  | 3685.097 | 100 |
| Type V/VI handles (aluminium) to front panels | Mounting kit for type V/VI handles: | | | |
| | Panhead posidrive screw ISO 7045-4.8-Z-A2K | M2.5 x 6  | 3687.146 | 1 set |
| | Bracket |  | | |
| Square nut DIN 562-11H-A2K | M2.5  | | | |

A photograph of an industrial PC system installed in a metal rack. The system includes a monitor mounted on a shelf, a keyboard and mouse on a pull-out tray, and a front panel with a perforated ventilation area. The background is a blue-tinted industrial setting.

INDUSTRIAL PC

**Standard solutions and individual assembly –
from plain enclosure to fully integrated industrial PC**

We offer a multitude of Industrial PCs – be it a 19" rack-mount system or solutions for direct installation on mounting plates.

The cases for Industrial PCs shown in this chapter only represent a small sample of HEITEC's wide range of services in this sector. HEITEC offers the solution for Industrial PCs, tailored to your needs, whether it is a non-standard enclosure format or fully integrated Industrial PC system including mother-board, hard disk and input/output boards. Please contact us!

ATX HeiPac, aluminium



The top-of-the-range model with outstanding maintenance-friendliness: The inner housing can be pulled out like a drawer.

ATX 4 U, stainless steel



Lockable front plate to prevent unauthorised access.

ATX with front adaptors



19" version for mounting in the enclosure

AT/ATX (Vario) Economy with frontdoor



Easy de-mounting of disk drive module for external assembly.

INDUSTRIAL PC OVERVIEW HEITEC INDUSTRIAL PC

ATX HeiPac



4 U, aluminium
Order no. see page 208

Applications

- 19" cabinets and enclosures
- Industrial PCs for ATX-, Mini-ATX or Micro ATX boards
- Office- and industrial sector

Technical Specifications

- Enclosure of aluminium, clear-chromated
- Removable inner housing
- Fully assembled and pre-wired
- Including fan and PSU
- EMC prepared
- Electronics for automatic restart following a mains failure

Benefits at a glance

Top-of-the-range aluminium model for installation of an Industrial PC in ATX format. Advantage: outstanding maintenance friendliness. The inner housing can be pulled out like a drawer and thus enables optimum access to all components.

ATX



4 U, stainless steel
Order no. see page 209

Applications

- 19" cabinets and enclosures
- Server enclosures
- Industrial PCs for ATX-, Mini-ATX or Micro ATX boards
- Office- and industrial sector

Technical Specifications

- Enclosure of stainless steel, zinc-plated
- Suitable for mounting on slide rails
- Fully assembled and pre-wired
- Including fan and PSU
- EMC prepared
- Lockable front plate

Benefits at a glance

The neutral design of this system offers a multitude of application areas in the office- or industrial sector. The lockable front plate prevents unauthorised access.

ATX Economy with front door



4 U, stainless steel
Order no. see page 210

Applications

- 19" cabinets and enclosures
- Industrial PCs for ATX-, Mini-ATX or Micro ATX boards
- Industrial sector

Technical Specifications

- Enclosure of stainless steel, zinc-plated
- Hinged, lockable front door
- Suitable for mounting on telescopic slides
- EMC prepared
- Fully assembled and pre-wired
- Including fan and PSU

Benefits at a glance

This solid construction of stainless steel is suitable for extreme industrial environments with high requirements concerning ruggedness and safety. Two versions: ATX Economy, fully assembled and pre-wired or AT/ATX Vario Economy as basic case for individual assembly – for example AT- or ATX applications.

Modular System AT/ATX (Vario) Economy



4 U, stainless steel
Order no. see page 211

Applications

- 19" cabinets and enclosures
- Industrial PCs for ATX-, Mini-ATX or Micro ATX boards or AT-/Baby-AT boards
- Industrial sector

Technical Specifications

- Enclosure of stainless steel, zinc-plated
- Hinged, lockable front door
- Suitable for mounting on telescopic slides
- EMC prepared
- Fully assembled and pre-wired including fan and PSU
- Individually upgradeable

Benefits at a glance

The modular principle of AT/ATX Vario Economy allows various installations for individual requirements. The basic case may be fitted for both AT- and ATX applications with the appropriate selection of rear panels, power supply units and front panels. For self-assembly or on request fully assembled and pre-wired.

ATX with front adaptors



4 U
Order no. see page 212

Applications

- 19" cabinets and enclosures
- Industrial PCs for ATX-, Mini-ATX or Micro ATX boards
- Industrial sector

Technical Specifications

- Enclosure of stainless steel, zinc-plated
- For installation in 19" cabinets
- Suitable for mounting on telescopic slides or on slide rails
- EMC prepared
- Fully assembled and pre-wired
- Including fan and PSU

Benefits at a glance

Flexibility in all application sectors: for example little space, a required connection to other systems or for front access of I/O connections. The 19" version is suitable for installation in cabinets.

ATX with front adaptors for wall-mounting



Width x Height: 380 x 330 mm
Order no. see page 213

Applications

- 19" cabinets and enclosures
- Installation on mounting plates
- Industrial PCs for ATX-, Mini-ATX or Micro ATX boards
- Industrial sector

Technical Specifications


- Enclosure of stainless steel, zinc-plated
- For installation on mounting plates
- Suitable for mounting on telescopic slides or on slide rails
- Fully assembled and pre-wired
- Including fan and PSU

Benefits at a glance

Flexibility in all application sectors: for example little space, a required connection to other systems or for front access of I/O-connections. Flanges on the rear panel for installation on mounting plates.

INDUSTRIAL PC ATX HeiPac

ATX HeiPac 4 U, Aluminium

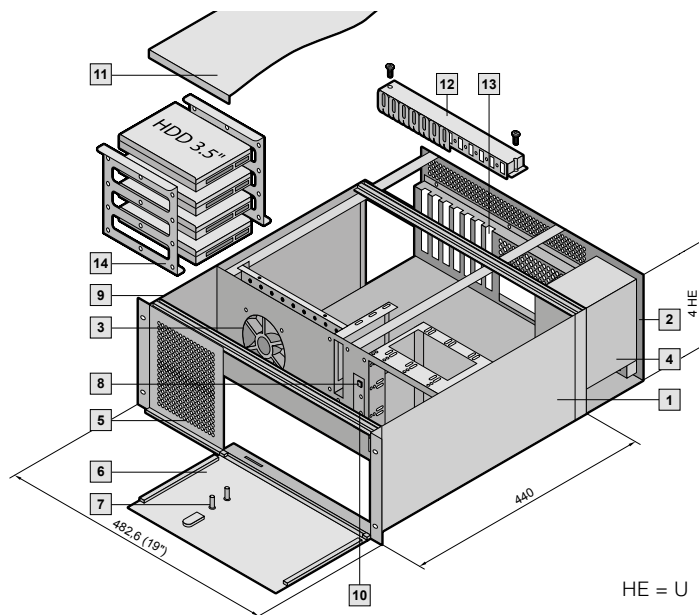

Technical specifications

482.6 mm (19'') rack-mount system for the installation of ATX/Mini-ATX or Micro-ATX boards and 3 x 5 1/4'' and 1 x 3 1/2'' drives.
Width: 482.6 mm (19'')
Height 4 U (177.0 mm)
Total depth: 440 mm
EMC prepared

Material/surface

Side panels, front panels: Aluminium, clear-chromated
Covers: 1.0 mm aluminium, clear-chromated
PC internal cassette: Sheet steel, zinc-plated, passivated

Standards

Complies with IEC 60 297-3 and ATX-specification 2.01


Supply includes

- | | |
|---|--|
| 1 Rack-mount system 4 U including drive holder | 7 LED displays |
| 2 PC cassette | 8 Reset button |
| 3 1 x 120 mm fan with filter | 9 EMC gaskets, all round |
| 4 ATX power pack 350 W | 10 ON/OFF switch with electronics for automatic restart following a mains failure (activation/deactivation of the electronics via jumper) |
| 5 Front door, horizontally hinged | 11 Cover |
| 6 Front door, horizontally hinged, lockable | |

| | Packs of | | Page |
|---|----------|-----------------|------|
| U | | 4 | |
| Width mm | | 482,6 (19'') | |
| Height mm | | 177.0 | |
| Depth mm | | 440.0 | |
| Model No. basic system fully assembled | 1 | 3659.000 | |
| Accessories | | | |
| 12 Card retainer | 7 | 3659.010 | 215 |
| Mounting bar for card retainer | 1 | 3659.090 | 215 |
| 13 Unused slot cover | 5 | 3659.030 | 214 |
| Cover for 5 1/4'' drive space | 1 | 3659.050 | 214 |
| 14 Drive support | 1 set | 3659.060 | 215 |

Other customised subrack solutions are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

ATX 4 U, sheet steel

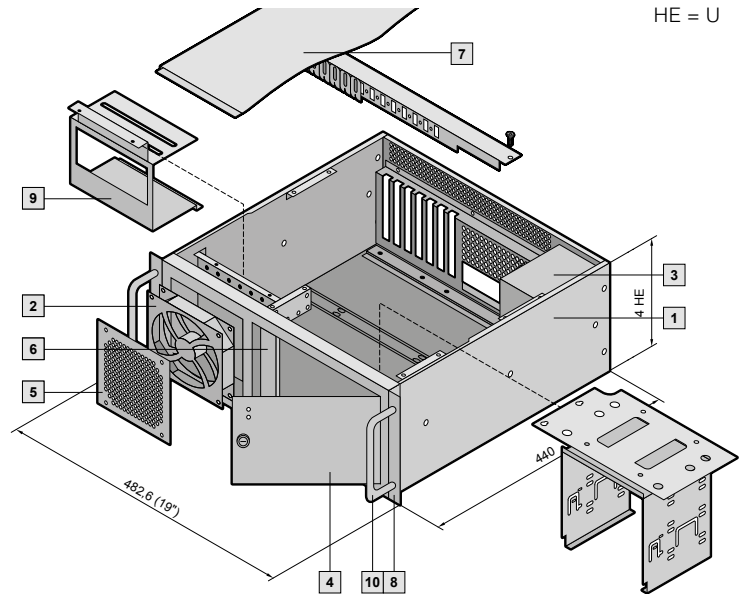

Technical specifications

482.6 mm (19") rack-mount system for the installation of ATX/Mini-ATX or Micro-ATX boards and 3 x 5 1/4" and 1 x 3 1/2" drives.
Width: 482.6 mm (19")
Height 4 U (177.0 mm)
Side panels: 174.0 mm
Total depth: 442.5 mm
Suitable for mounting on slide rails.

Material/surface

Case, covers, front panels: 1.2 mm sheet steel, spray finished in RAL 7035, unpainted contact points

Standards

Complies with IEC 60 297-3 and ATX-specification 2.01

Supply includes


- 1** Rack-mount system 4 U including drive holder
- 2** 1 x 120 mm fan and filter mat, exchangeable from the front
- 3** ATX power pack 350 W
- 4** Front door, vertically hinged, lockable
- 5** Front panel with ventilation holes and filter mat
- 6** LED displays, speakers
Reset switch, on/off switch
- 7** Cover
- 8** Two 19" flanges
- 9** Drive holder for 4 x 3 1/2" hard drives

| | Packs of | | Page |
|---|----------|-----------------|------|
| U | | 4 | |
| Width mm | | 482,6 (19") | |
| Height of flanges/side panels mm | | 177.0/174.0 | |
| Depth mm | | 442.5/440.0 | |
| Model No. basic system fully assembled | 1 | 3659.900 | |
| Accessories | | | |
| Card retainer | 7 | 3659.010 | 215 |
| Mounting bar for card retainer | 1 | 3659.090 | 215 |
| Unused slot cover | 5 | 3659.030 | 214 |
| Cover for 5 1/4" drive space | 1 | 3659.110 | 214 |
| Cover for 3 1/2" drive space" | 1 | 3659.410 | 214 |
| Telescopic slides for 600 mm enclosure depth | 1 set | 3659.180 | 214 |
| Telescopic slides for 800 mm enclosure depth | 1 set | 3659.190 | 214 |
| 10 Front handles for ATX 4 U | 2 | 3659.240 | 215 |

Other customised subrack solutions are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

INDUSTRIAL PC ATX ECONOMY

ATX Economy with front door, 4 U, sheet steel

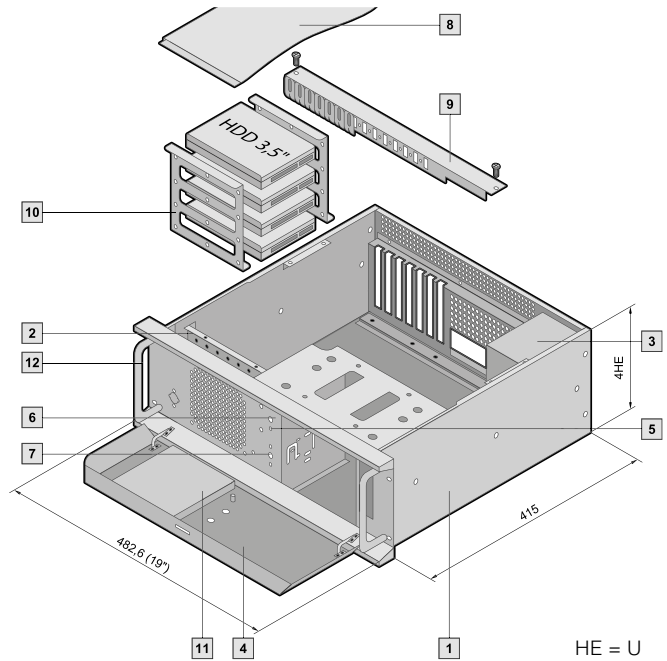

Technical specifications

482.6 mm (19") rack-mount system for the installation of ATX/Mini-ATX or Micro-ATX boards and 3 x 5 ¼" and 1 x 3 ½" drives.
 Width: 482.6 mm (19")
 Height 4 U (177.0 mm)
 Total depth: 430 mm
 EMC prepared

Material/surface

Case, cover: 1.2 mm sheet steel, zinc plated, passivated front door
 1.2 mm, sheet steel spray finished in RAL9035, unpainted contact points

Standards

Complies with IEC 60 297-3 and ATX-specification 2.01


Supply includes

- 1** Rack-mount system 4 U including drive holder
- 2** 1 x 120 mm fan with filter mat
- 3** ATX power pack 350 W
- 4** Front door, horizontally, hinged, lockable
- 5** LED displays, speakers
- 6** Reset button
- 7** On/off switch
- 8** Cover

| | Packs of | | Page |
|---|----------|-----------------|------|
| U | | 4 | |
| Width mm | | 482.6 (19") | |
| Height mm | | 177.0/174.0 | |
| Depth mm | | 430.0/415.0 | |
| Model No. basic system fully assembled | 1 | 3659.100 | |
| Accessories | | | |
| Card retainer | 7 | 3659.010 | 215 |
| Mounting bar for card retainer | 1 | 3659.090 | 215 |
| Unused slot cover | 5 | 3659.030 | 214 |
| Cover for 5¼" drive space | 1 | 3659.110 | 214 |
| Cover for 3½" drive space | 1 | 3659.410 | 214 |
| 10 Drive holder | 1 set | 3659.230 | 214 |
| 11 Spare filter mat | 1 | 3659.120 | - |
| Telescopic slides for 600 mm enclosure depth | 1 set | 3659.180 | 214 |
| Telescopic slides for 800 mm enclosure depth | 1 set | 3659.190 | 214 |
| 12 Front handles for ATX 4 U | 2 | 3659.240 | 215 |

Other customised subrack solutions are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

Modular system AT/ATX Vario Economy with front door, 4 U, sheet steel

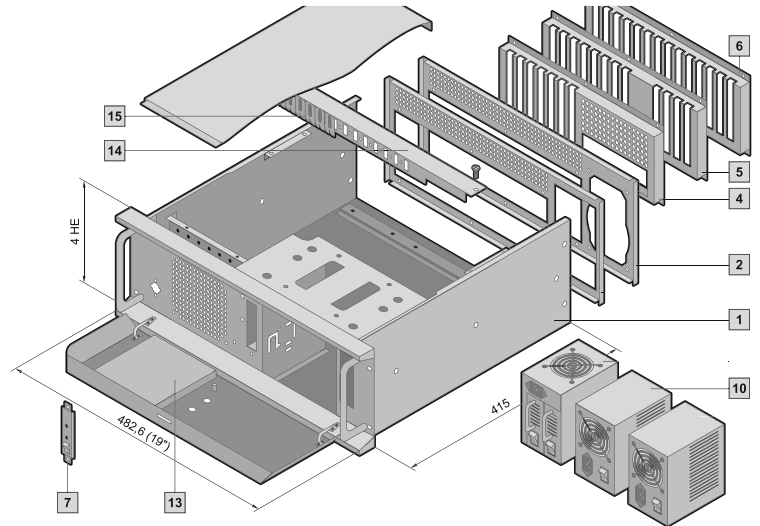

HE = U

The modular principle of AT/ATX Vario Economy allows installation to accommodate individual requirements. The basic case may be fitted for both AT and ATX applications with the appropriate selection of rear panels, power packs and front trim panels. For self-assembly, or on request fully assembled and wired.

Technical specifications

482.6 mm (19") rack-mount system for the installation of ATX/Mini-ATX, Micro-ATX or Baby AT boards and 3 x 5¼" and 1 x 3½" drives.
Width: 482.6 mm (19")
Height: 4 U (177.0/174.0 mm)
Total depth: 430 mm

Note

Rear panel, front trim panel and power pack should be ordered separately (for self-assembly).

Material/surface finish

Case, cover: 1.2 mm sheet steel, zinc-plated, passivated
Front door: 1.2 mm sheet steel, spray-finished in RAL 7035, unpainted contact points

Standards

Complies with IEC 60 297-3 and ATX specification 2.01

Special designs available on request

Basic enclosure supply includes


- 1 Case 4 U, 430 mm deep including assembly parts, covers, drive holder, fan, horizontally hinged front door, and air filter.

| | Packs of | | | | | | | Page |
|---|----------|---|-----------------|-----------------|--|-----------------|-----------------|------|
| U | | 4 | | | | | | |
| | | Installation for AT/ATX power pack (PS/2) | | | Installation for redundant power pack (PS/2) | | | |
| | | ATX | AT 8 + 4 slot | AT 14 slot | ATX | AT 8 + 4 slot | AT 14 slot | |
| Model No. basic enclosure fitted | 1 | 3659.400 | | | | | | |
| Installation, rear | | | | | | | | |
| 2 Rear panel for AT/ATX power pack | 1 | 3659.290 | 3659.290 | 3659.290 | - | - | - | 216 |
| 4 Slotted rear panel for ATX 7 slots | 1 | 3659.320 | - | - | 3659.320 | - | - | 217 |
| 5 Slotted rear panel 8 + 4 slots for AT | 1 | - | 3659.330 | - | - | 3659.330 | - | 217 |
| 6 Slotted rear panel 14 slots for AT | 1 | - | - | 3659.340 | - | - | 3659.340 | 217 |
| Installation, front | | | | | | | | |
| 7 Front trim panel ATX with 2 x LED, reset switch | 1 | 3659.350 | - | - | 3659.350 | - | - | 214 |
| Power packs | | | | | | | | |
| 10 ATX power pack 350 W FSP350-70PFL | 1 | 9921.966 | - | - | - | - | - | |
| Fan 12 V DC, 60 mm, for the rear panel | 2 | 3659.250 | 3659.250 | 3659.250 | 3659.250 | 3659.250 | 3659.250 | 216 |
| 13 Spare filter mat | 1 | 3659.120 | 3659.120 | 3659.120 | 3659.120 | 3659.120 | 3659.120 | - |
| Accessories | | | | | | | | |
| 14 Mounting bar for card retainer | 1 | 3659.090 | 3659.090 | 3659.090 | 3659.090 | 3659.090 | 3659.090 | 215 |
| 15 Card retainer | 7 | 3659.010 | 3659.010 | 3659.010 | 3659.010 | 3659.010 | 3659.010 | 215 |

Other customised subrack solutions are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

INDUSTRIAL PC ATX WITH FRONT ADAPTORS

ATX with front connections for 482.6 mm (19") installation, 4 U

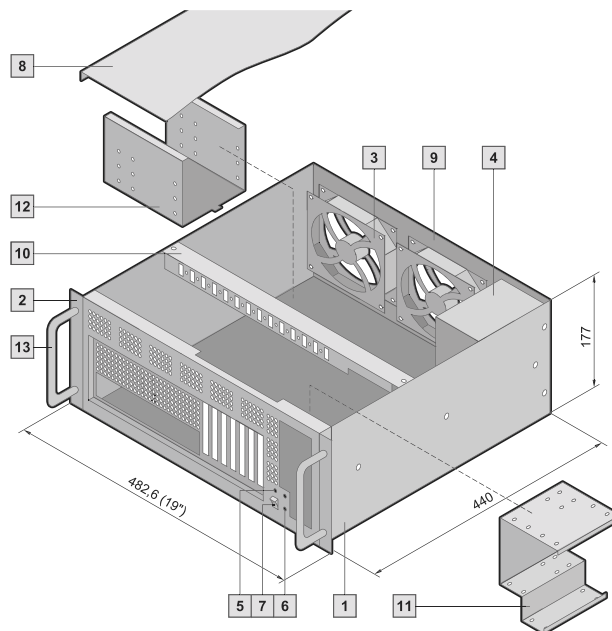

Technical specifications

482.6 mm (19") rack-mount system for the installation of ATX/Mini-ATX or Micro-ATX boards and 1 x 5¼" and 1 x 3½" drives.
Width: 482.6 mm (19")
Height: 4 U
Flanges: 177.0 mm
Side panels: 174.0 mm
Total depth: 442.5 mm
Connections for I/Os, front
EMC prepared. Suitable for mounting on slide rails

Material/surface finish

Case, covers: 1.2 mm sheet steel, spray-finished in RAL 7035, unpainted contact point

Supply includes

- | | |
|---|---|
| 1 Rack-mount system 4 U including drive holder | 8 Cover |
| 2 19" flanges | 9 Rear panel with cutout and connection for power pack |
| 3 2 x 120 mm fans | 10 Mounting bar for card retainer |
| 4 ATX power pack 350 W | 11 Drive holder for 1 x 5¼" and 1 x 3½" |
| 5 LED displays | 12 Drive holder for 3 x 3½" and hard drives |
| 6 Reset button | |
| 7 On/off switch | |



Standards

Complies with IEC 60 297-3 and ATX specification 2.01

| | Packs of | | Page |
|---|----------|-----------------|------|
| U | | 4 | |
| Width mm | | 482.6 (19") | |
| Height of flanges/side panels mm | | 177.0/174.0 | |
| Depth mm | | 442.5/440.0 | |
| Model No. basic system fully assembled | 1 | 3659.700 | |
| Accessories | | | |
| Card retainer | 7 | 3659.010 | 215 |
| Unused slot cover | 5 | 3659.030 | 214 |
| Cover for 5¼" drive space | 1 | 3659.110 | 214 |
| Cover for 3½" drive space | 1 | 3659.410 | 214 |
| Telescopic slides for 600 mm enclosure depth | 1 set | 3659.180 | 214 |
| Telescopic slides for 800 mm enclosure depth | 1 set | 3659.190 | 214 |
| 13 Front handles for ATX 4 U | 2 | 3659.240 | 215 |

Other customised subrack solutions are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

ATX with front adaptors for wall-mounting

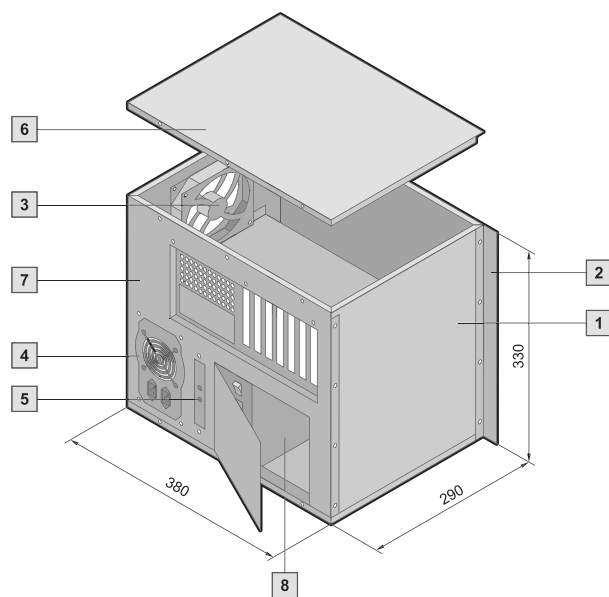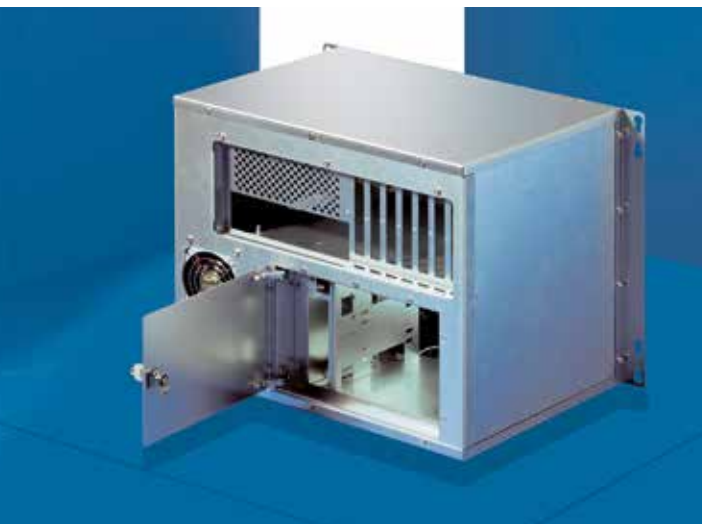

Technical specifications

System for the installation of ATX/Mini-ATX or Micro-ATX boards and 3 x 5¼" and 1 x 3½" drives, vertical.

Height: 330 mm

Total depth: 292.5 mm

Connections for I/Os, front

EMC prepared.

Suitable for mounting

Suitable for mounting on mounting plates

Material/surface finish

Case, covers: 1.2 mm sheet steel, zinc-plated, passivated, unpainted, unpainted contact points

Supply includes

- | | |
|---|---|
| 1 Rack-mount system including drive holder | 6 Cover |
| 2 Flanges for wall mounting | 7 Front panel |
| 3 1 x 120 mm fan | 8 Drive holder for 1 x 5¼" and 1 x 3½" |
| 4 ATX power 350 W | |
| 5 LED displays | |

Standards

Complies with IEC 60 297-3 and ATX specification 2.01

| | Packs of | | Page |
|---|----------|-----------------|------|
| Width mm | | 380.0 | |
| Height mm | | 330.0 | |
| Depth mm | | 292.5/290.0 | |
| Model No. basic system fully assembled | 1 | 3659.710 | |
| Accessories | | | |
| Unused slot cover | 5 | 3659.030 | 214 |
| Cover for 5¼" drive space | 1 | 3659.110 | 214 |
| Cover for 3½" drive space | 1 | 3659.410 | 214 |

Other customised subrack solutions are available upon request. Please get in contact with one of our sales representatives for further assistance: Tel. +49 9126 - 29 34 0

Unused slot cover



Screw-on cover to conceal slot cut-outs which are not required.

| Packs of | Order No. |
|----------|-----------------|
| 5 | 3659.030 |

Material

Sheet steel
Clear-chromated

Supply includes

Assembly parts

Cover for drives



To conceal the 3/2" or 5/4" drive slots.

Material

Sheet steel
Zinc-plated, spray-finished in RAL 7035

Supply includes

Assembly parts

| Design | Packs of | Order No. |
|--------|----------|-----------------|
| 3/2" | 1 | 3659.410 |
| 5/4" | 1 | 3659.110 |

For ATX HeiPac

| Design | Packs of | Order No. |
|--------|----------|-----------------|
| 5/4" | 1 | 3659.050 |

Telescopic slides



Facilitate optimum accessibility to the units, even when built-in.
For up to a maximum enclosure width of 426 mm.

Load capacity

30 kg

Material

Sheet steel

Supply includes

1 set = 2 telescopic slides
Installation kit
Assembly parts

| For enclosure depth mm | Max. extension mm | Order No. |
|------------------------|-------------------|-----------------|
| 600 | 511.2 | 3659.180 |
| 800 | 596.4 | 3659.190 |

! Note

Only applicable in connection with L-shaped 19" profiles

Front handles



The handles are fitted onto the 482.6 mm (19") flanges. They allow easy withdrawal of the cases from the enclosure.

Material

Sheet steel
Plated

Supply includes

Assembly parts

| For enclosure height (U) | Packs of | Order No. |
|--------------------------|----------|-----------------|
| 1 | 2 | 3659.540 |
| 2 | 2 | 3659.020 |
| 4 | 2 | 3659.240 |

Drive holder



The drive holder will accommodate a maximum of 4 additional 3½" hard disks. They are mounted inside the enclosure behind the fan.

Material

Sheet steel
Zinc-plated

Supply includes

Assembly parts

| For system | Packs of | Order No. |
|-------------|----------|-----------------|
| ATX Economy | 1 set | 3659.230 |
| ATX HeiPac | 1 set | 3659.060 |

Card retainer



For secure attachment and stabilisation of slot cards up to 327 mm depth. The card retainers are height-adjustable so that even cards of different heights may be securely attached.

A mounting bar is needed to fit the card retainer (already included with ATX HeiPac).

Material

Card retainer: Plastic
Mounting bar: Sheet steel, zinc-plated

Supply includes

7 Card retainer 41 mm
3 Card retainer 28.3 mm
1 Extension long 86.2 mm
1 Extension short 56.8 mm

| Card retainer | Packs of | Order No. |
|---------------|----------|-----------------|
| | 1 set | 3659.010 |

| Mounting bar | Packs of | Order No. |
|--------------|----------|-----------------|
| | 1 | 3659.090 |

Adaptor



For the installation of 3 1/2" hard disks or floppies in 5 1/4" installation slots.

Material

Sheet steel, zinc-plated
Front panel: Spray-finished in RAL 7035

Supply includes

Assembly parts

| Design | Packs of | Order No. |
|----------------------|----------|-----------------|
| for 3 1/2" hard disk | 1 | 3659.270 |
| for 3 1/2" floppy | 1 | 3659.280 |

DC fan for rear panel



Fan 12 V DC, 60 mm, for mounting on the rear panel. Including two 4-pole connectors with terminal.

Supply includes

2 fans with connection cable
Including assembly parts.

| Packs of | Order No. |
|----------|-----------------|
| 2 | 3659.250 |

Rear panels



For the installation of AT/ATX Economy. Optionally with cut-out for AT/ATX power pack or redundant power pack.

Material


Sheet steel
Zinc-plated

Supply includes

Assembly parts

| Design | Packs of | Order No. |
|---|----------|-----------------|
| for AT/ATX PS2 and redundant power supply | 1 | 3659.290 |

Slotted rear panels

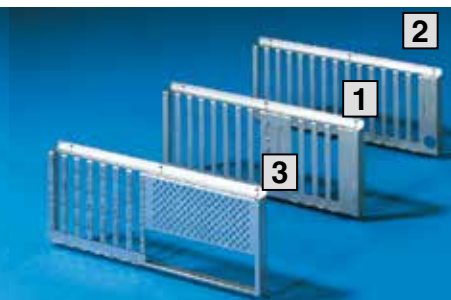

For the installation of AT/ATX Economy. Mounted on the rear panels. Optionally for AT (8 + 4 or 14 slots) or ATX (7 slots).

Material

Sheet steel
Zinc-plated

Supply includes

Assembly parts

| Design | Packs of | Order No. |
|-----------------|----------|-----------|
| 1 AT 4 + 8 Slot | 1 | 3659.330 |
| 2 AT 14 Slot | 1 | 3659.340 |
| 3 ATX 7 Slot | 1 | 3659.320 |

Front trim panels



For the installation of AT/ATX Economy. Mounted in the front of the enclosure.

Optionally for:

- ATX (2 x LED, reset button)

| Design | Packs of | Order No. |
|--------|----------|-----------|
| ATX | 1 | 3659.350 |



HEITEC SYSTEM PLATFORMS

Standardised components
for individual application possibilities

SYSTEM PLATFORMS

HEITEC supplies complete plug & play solutions for several application possibilities at a high level – up to Level 5. The systems are based on standardised components which may be individually combined, depending on requirements.

They are supplied completely with power supply, backplane, measures for EMC and ESD protection, as well as climate control; fully assembled, pre-wired and tested.

MicroTCA, AdvancedMC



→ Page 222

CompactPCI



→ Page 230

CompactPCI Serial



→ Page 242

VME/VME64x



→ Page 244

Backplanes



→ Page 252

MPS Monitoring



→ Page 255

SYSTEM PLATFORMS

OVERVIEW MicroTCA / TCA

MicroTCA – compact package, wide range of applications



As an amendment to the AdvancedTCA standard, the MicroTCA specification mTCA.x was created as a compact version for a variety of applications. MicroTCA offers standardised modularity, compact design and a high scalability and bandwidth.

Additionally, the consistent platform strategy reduces the time to market. Whenever ultra fast data transmission or data storage is required, MicroTCA systems are the first choice. This is true not only for telecom applications but also for industrial control systems or medical engineering.



HEITEC ELECTRONIC PACKAGING SYSTEMS offers the “complete know-how” for professional Electronic Packaging – for MicroTCA-, CPCI-, VME- and customer specific applications.

Our range of services comprises complete “plug & play”- systems including backplanes, power supply and effective cooling units.

xTCA™ AdvancedMC™

MicroTCA development system VP1 single/double



3/5 U, 12 slots
Order no. see page 222

Applications

MicroTCA specification is designed as an amendment to the ATCA standard as a lower-cost compact version for the low-end sector. The main features are a compact design, high scalability, modularity and considerably reduced system costs.

MicroTCA development systems are suited for design of hardware software or for testing AMC modules.


Technical specifications

- 19" rack-mount system 3 or 5 U, 200 mm deep
- For installing single (3 U) or double (5 U) AMC modules
- 12 x AMC slots (8 x full, 4 x compact)
- 2 x MCH slots
- 2 x Power slots
- Integrated power adapter
- Fan unit for cooling up to 40W/slot
- Backplane 14 slots
- Support brackets

Benefits at a glance

- Conforms to PICMG MicroTCA.0 R1.0 and AMC.0 R2.0
- Integrated fan unit
- Integrated power adapter
- Fully wired and tested

MicroTCA rack-mount system VP1 single/double

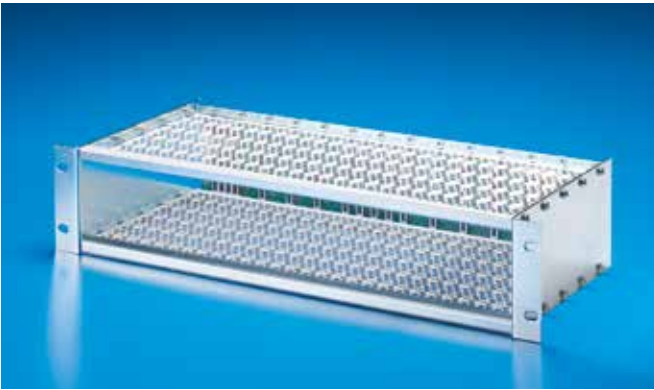

2/4 U, 12 slots
Order no. see page 222

Applications

MicroTCA specification is designed as an amendment to the ATCA standard as a lower-cost compact version for the low-end sector. The main features are a compact design, high scalability, modularity and considerably reduced system costs. The rack-mount systems are suited for applications in the low-end telecommunication or industrial sectors.


Technical specifications

- 19" rack-mount system 2 (+10 mm) or 4 U, 200 mm deep
- For installing single (2 U) or double (4 U) AMC modules
- 12 x AMC slots (8 x full, 4 x compact)
- 2 x MCH slots
- 2 x Power slots
- Backplane 14 slots

Benefits at a glance

- Conforms to PICMG MicroTCA.0 R1.0 and AMC.0 R2.0
- Fully wired and tested

CubeTCA

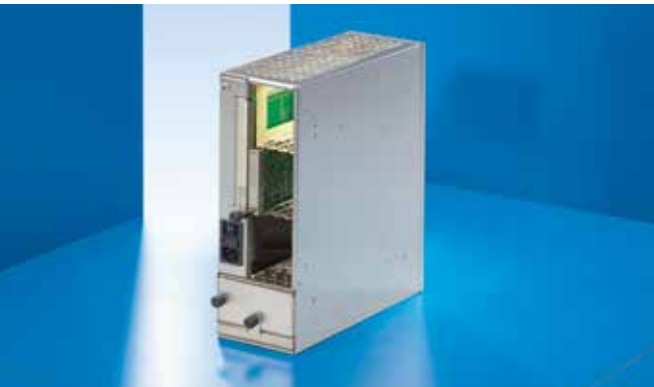

7 slots
See page 224

Applications

Based on the MTCA specification the compact CubeTCA offers a wide range of application fields in the industrial sector. The CubeTCA can either be assembled directly on the mounting plate or integrated within the target system.

Technical specifications

- Frame 109 x 307 x 286 mm
- 7 slots – 6 x AMC, 1 x MCH
- Removable cooling unit with two axial-flow fans and filter
- AC/DC power supply, 350 W
- Optional brackets for assembly on mounting plates
- Optional adapter for cap rail installation

Benefits at a glance

- Conforms to MicroTCA.0 R1.0
- Compact design
- Assembly on mounting plate or in the target system
- Plug-in fan unit
- 7 slots
- Fully assembled, wired and tested

PicoTCA



2 U, 13 slots
Order no. see page 223

Applications

Based on the MTCA specification, PicoTCA is a modular ready-to-run system, which carries up to 12 AMCs and 1 MCH. Due to the robust construction, the 19" rack can be used both in the telecommunication and in the industrial sector.

Technical specifications

- 19" rack-mount system, 2 U, 250 mm deep
- Supports 12 AMCs (full-size, compact) and 1 MCH
- Cooling via 2 stand-alone cooling units with removable air filter
- EMC version
- AC/DC power supply: 450 W
- Backplane and AMC-connector in con:card+ quality from HARTING
- Integrated JTAG-connector for debug and test
- Support up to 12.5 Gb/s

Benefits at a glance

- Conforms to PIGMG MicroTCA.0 R1.0
- Ready-to-run system of minimum space
- For installation in 300 mm deep enclosures
- Support up to 12.5 Gb/s
- Removable air filter
- Robust industrial model guarantees shock and vibration protection
- Compliant to NEBS
- Fully assembled, wired and tested

MicroTCA – compact package, wide range of applications



MicroTCA development systems for hardware and software development or testing of AMC modules

Technical specifications

- Complies with PICMG Micro-TCA.0 R1.0 and AMC.0 R1.0
- 482.6 mm (19") development systems in 3 and 5 U, 200 mm deep for installing Single or Double AdvancedMC modules
- Integral fan unit for cooling up to 40 W/slot
- Including backplane, 14 slots
- Fully wired and tested



MicroTCA rack-mounted system for applications in the low-end telecommunications and industry sectors.

Technical specifications

- Complies with PICMG Micro-TCA.0 R1.0 and AMC.0 R1.0
- 482.6 mm (19") rack-mount systems in 2 and 4 U, 200 mm deep for installing Single or Double AdvancedMC modules
- Including backplane, 14 slots (complies with MTCA.0 R1.0)
- Fully wired and tested
- Order climate control units separately

Material

Rack-mount systems of sheet steel, zinc-plated, sprayfinished

Supply includes

1 482.6 mm (19") system, 200 mm deep,
1 backplane

For additional development system:

1 fan unit
2 support brackets

Note

Power Module has to be ordered separately, see page 225.
For 4 or 5 U systems you may optionally order a 6 HP divider rail in order to cover the free space above the power module.

MicroTCA development systems

| µTCA system | U | AMC-Slots | MCH-Slots | Power-Slots | Order No. |
|-------------|---|----------------------------|-----------|-------------|-----------------|
| VP 1 single | 3 | 12 (8 x full, 4 x compact) | 2 | 2 | 3666.006 |
| VP 1 double | 5 | 12 (8 x full, 4 x compact) | 2 | 2 | 3666.007 |

Power modules available on request.

MicroTCA rack-mount systems

| µTCA system | U | AMC-Slots | MCH-Slots | Power-Slots | Order No. |
|-------------|------------|----------------------------|-----------|-------------|-----------------|
| VP 1 single | 2 (+10 mm) | 12 (8 x full, 4 x compact) | 2 | 2 | 9911.758 |
| VP 1 double | 4 | 12 (8 x full, 4 x compact) | 2 | 2 | 9911.760 |

PicoTCA, 19", 2 U



The PicoTCA is a modular 19" chassis in 2 U design supporting up to 12 AMC's (fullsize, compact) and an MCH (fullsize). The chassis is designed such that communication protocols compliant with AMC.1 type 4 (PCIe and Advanced Switching), AMC.2 type 4, AMC.2 E2 (GbE) and AMC.3 (SAS/SATA) can all be handled. For SAS and SATA/AMC boards, a point-to-point connection is realised via the backplane, so that each slot is able to communicate directly with its neighbouring slots via ports 2 and 3. In the initial version, an MCH (Micro-TCA Carrier Hub) is supported via the backplane. Customer-specific designs and backplanes can be supplied upon request.

Benefits at a glance

- Conforms to PICMG Micro-TCA.0 R1.0
- Extremely compact ready-to-run system
- Chassis depth of 250 mm for installation in 300 mm deep enclosures
- Includes AC/DC power supply
- Support for up to 12.5 Gb/s
- Support for different AMC form factors
- Exchangeable air filters
- High EMC shielding
- Robust industrial design
- Fully assembled, wired and tested. Ready to run


Technical specifications

- 19", 2 U, 250 mm deep
- AC/DC power supply, max. 450 W:
 - Input voltage: min. 90 V AC – max. 264 V AC with PFC
 - Input frequency: min. 47 Hz – max. 63 Hz
 - Output: 3.3 V DC/max. 3 A, 12 V DC/max. 38 A
- Cooling via 2 independent fan trays
- Backplane and AMC connectors in con:card+ quality from HARTING
- Integrated JTAG connector for debug and test
- Supports 12 AMC's (full-size, compact) compliant with AMC.1 type 4 E2S and AMC.2 type 4 E2S, as well as 1 MCH
- Weight: 5.9 kg
- Operating temperature: 0°C to +45°C
- Storage temperature: -40°C to +85°C


Supply includes

- 1 rack-mount system 482.6 mm (19"), 2 U, 250 mm deep,
- 2 fan tray modules with air filters,
- 1 power supply,
- 1 backplane,
- 1 power management board

| | Packs of | 2 U |
|----------------------|----------|-----------------|
| Width (W) | | 19" |
| Height (H) mm | | 87 |
| Depth (D) mm | | 250 |
| Order No. | 1 | 9911.803 |

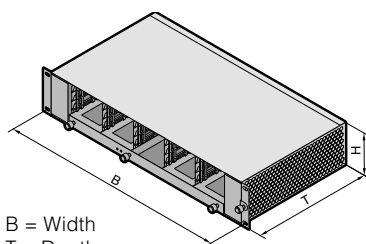

B = Width
T = Depth
H = Height

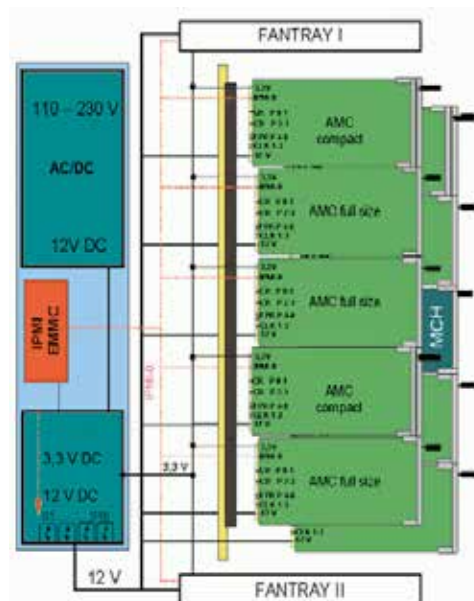

SYSTEM PLATFORMS

MicroTCA – CubeTCA

CubeTCA



Due to the compact dimensions the cubeTCA platform offers a huge variety of applications in the industrial sector. Assembly on mounting plate or in the target system by using integrated key holes or adapters for assembly directly on support rails.

Benefits at a glance

- Conforms to MicroTCA.0 R1.0
- Compact design
- Assembly on mounting plate or in the target system
- 7 slots for 6 x AMC, 1 x MCH
- Plug-in fan unit with 2 axial flow fans and filter
- Integrated AC/DC power supply
- Fully assembled, wired and tested

Technical specifications

- 6 front slots
- Backplane 6 slots inclusive
- Removable cooling unit
- AC/DC power supply: 350 W

Material

Stainless steel

Supply includes

1 system


Note

Available on request

+ Accessories

Brackets for assembly on mounting plates
Top hat rails for installation on support rails

B = Width
T = Depth
H = Height



Technical details



Installation space

For 6 AMC, 1 x MCH



Cooling unit and filter,

Removable

Accessories on request



Top hat rails

For installation on support rails.



Brackets

For rear or lateral assembly on mounting plates.

Power Module PM



The PM is a 355 W MicroTCA PowerModule in Advanced Mezzanine Card (AMC) form factor, single/full-size compliant to MTCA.0 specification. The Power Module comprises an Enhanced Module Management Controller (EMMC) that communicates with the Carrier Manager via Intelligent Platform Management Bus (IPMB).

Technical specifications

- Power supply for MicroTCA Carrier Hub (MCH) AdvancedMCs and Cooling Units (CU)
- Operates via IPMI with a MicroTCA Carrier Hub (MCH)
- Power monitoring of each channel
- 16 x 12 volt channels for Payload Power
- 16 x 3.3 Volt channels for Management Power
- EMC- filter, transient protection, input current lock-out

| Description | Order No. |
|--------------|-----------------|
| PM 355W/-48V | 3666.008 |

Technical Details

- 355 W
- – 48 VDC Input
- 12 VDC Output
- 3.3 VDC Output

SYSTEM PLATFORMS

AdvancedMC – FACE PLATES

AMC Face Plate Kits



These are used as face plates for AMC cards and ATCA carriers, or as filler panels in MicroTCA systems.

- Installation in μ TCA systems or AMC carriers
- Conforms to AMC.0 R2.0
- Height: Single & Double
- Widths: Compact, Mid-Size, Full-Size
- Simple handling when locking and unlocking (no screws)
- Hot swap-compatible injector/extractor handles
- Customer-specific face plates available with a short lead time
- Upgradable with filler sheets and air baffle plates
- Double to Single conversion module (accessory)

Material

Face plate made from aluminium, (stainless steel available on request)
 Holder for light pipe and PCB, die-cast zinc
 Light pipe, polycarbonate
 Handle, die-cast zinc, spray-finished
 EMC seal, foam with metal fabric (UL 94 - V0)

Supply includes



- 1 U-channel face plate,
- 1 holder to accommodate a light pipe and PCB,
- 1 handle for microswitch,
- 1 light pipe (for 2 LEDs),
- 1 EMC gasket, left side and bottom

| Design (H x W) | Packs of | Order No. |
|--------------------|----------|-----------------|
| Single x Compact | 1 | 9911.885 |
| Single x Mid-Size | 1 | 9911.889 |
| Single x Full-Size | 1 | 9911.886 |
| Double x Compact | 1 | 9911.887 |
| Double x Mid-Size | 1 | 9911.890 |
| Double x Full-Size | 1 | 9911.888 |

Face plates with 4 LEDs in aluminium and stainless steel available on request (to AMC.0 Spec. R1.0)

+ Accessories

AMC filler sheets, air baffle plates, conversion module, see page 227

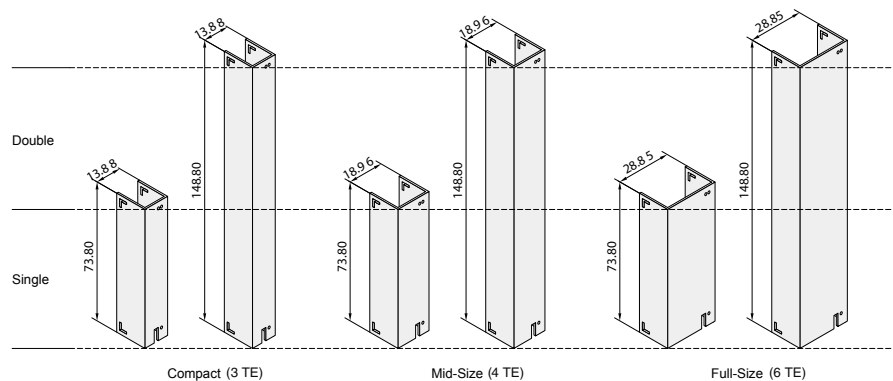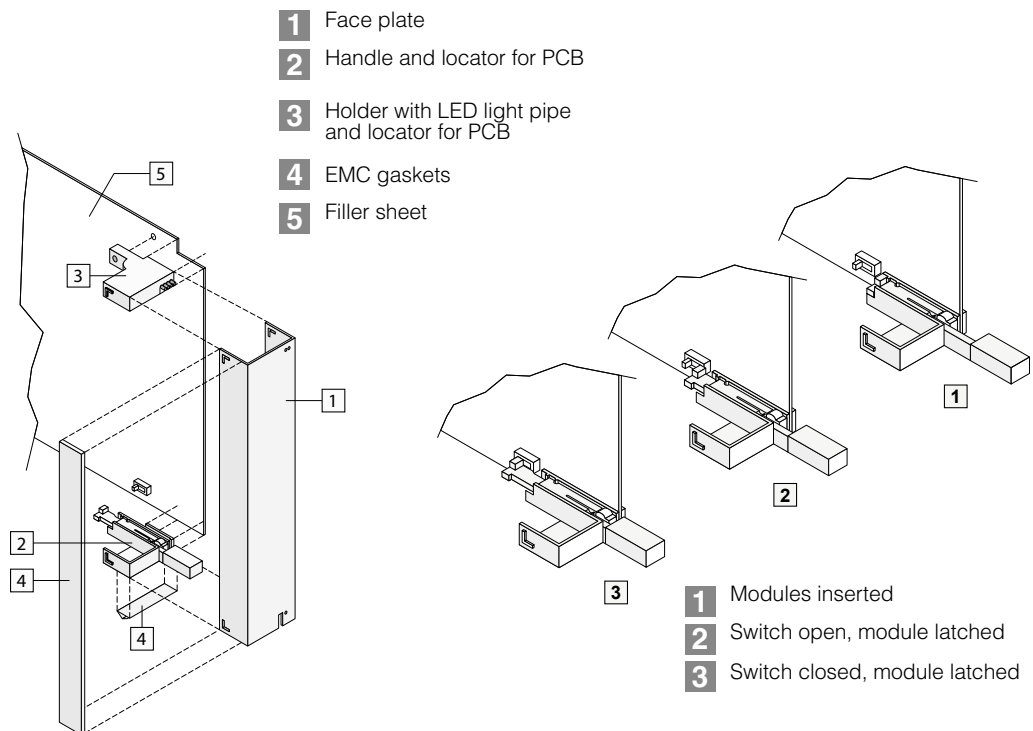

AMC filler sheets



Filler sheets are mounted on the AMC face plates and are used to route the airflow in ATCA carriers and MicroTCA systems.

They may additionally be equipped with air baffle plates to create suitable air resistance in an empty slot.

Material

Epoxy

| Design | Packs of | Order No. |
|--------|----------|-----------|
| Single | 1 | 9911.570 |
| Double | 1 | 9911.571 |



Air baffle plates



AMC slots must be populated with an empty card in order to ensure adequate air resistance. The air resistance should be adapted to the requirements of the overall system by the user. In all cases, it should be sufficiently high to ensure that the air is forced to flow over active cards into adjacent slots and does not flow unhindered through empty slots. The air baffle plate is used to adjust the air resistance. Up to 2 air baffle plates may be mounted on one filler sheet. Adjustable air resistance from 80 – 50 % thanks to removable membranes.

Material

Stainless steel

Supply includes

1 baffle plate
Assembly parts

| Design | Packs of | Order No. |
|-----------|----------|-----------|
| Compact | 1 | 9911.891 |
| Mid-Size | 1 | 9911.892 |
| Full-Size | 1 | 9911.893 |



Conversion module



The conversion module allows 1 x Double to be converted into 1 x Single slot. Option of installing Compact or Full-Size modules.

Material

Stainless steel, partially spray-finished

Supply includes

1 conversion module

| Design | Packs of | Order No. |
|-----------|----------|-----------|
| Compact | 1 | 9907.699 |
| Full-Size | 1 | 9911.220 |



SYSTEM PLATFORMS

RACK-MOUNT SYSTEMS FOR CompactPCI, CompactPCI SERIAL, VMEbus



CompactPCI®

CompactPCI® Serial



RACK-MOUNT SYSTEMS FOR CompactPCI, CompactPCI SERIAL, VMEbus

**EMC Features**

All components have a conductive surface: stainless steel EMC gaskets connect to the individual components. EMC front panels with EMC gaskets ensure proper contacting.

**ESD Protection**

ESD pin and ESD Clip in the guide rail deflect electrostatic charging before contacting the plug in unit. ESD Clip in the PCB guide rail provides permanent and direct deflection via the PCB.

**Ventilation**

Small card guides and horizontal rails ensure maximum air flow. Individual ventilation concepts provide well directed air ducting and ideal heat dissipation - optionally from bottom to top or from front to rear. Powerful HeiCool fan ensures optimum climate control. 1 U, hot swap compatible, 204 m³ /h including speed control and fault alarm signal.



**Systems for
CompactPCI**



**Systems for
CompactPCI Serial**



**Systems for
VME/VME64x**

BENEFITS AT A GLANCE

- Systems for setup of industrial computer systems according to CompactPCI specification and VME bus
- Robust mechanics
- Individual configuration on request
- Completely assembled, pre-wired and tested including backplane and power supply
- Individual cooling concepts
- Conforms to IEC 60 297-3 and IEEE 1101.1/10/11 and Compact PCI spec. rev.1.0 (PICMG)

SYSTEM PLATFORMS OVERVIEW RACK-MOUNT SYSTEMS FOR CompactPCI

CPCI-Systems Slim-Box Vario



1, 2, 3, 4 U/2, 4, 6, 8 slots
Order no. on request

Applications

Configuration of 19" industrial computer systems according to CompactPCI specification for

- Telecommunication
- Industrial Automation

Technical specifications

- 482.6 mm (19") rack-mount system for horizontal mounting of front boards or rear I/O boards
- 1 U, 2 U, 3 U, 4 U, 300 mm deep
- Standard cooling from left to right side
- Sheet steel, spray-finished (black)
- Preconfigured system including backplane and fan unit
- Completely assembled, pre-wired and tested
- Installation of CPCI-boards according to CompactPCI spec. 2.0 Rev. 3.0

Benefits at a glance

- Horizontal installation of Eurocards/Double Eurocards
- Maximum installation with minimum space requirement
- 2/4/6/8 front slots for 160 mm and back slots for 80 mm boards
- Hot-swap compatible power supplies , optionally AC or DC
- EMC and ESD protection
- Completely assembled, pre-wired and tested
- Integrated cooling from left to right
- Modular assembly for individual configuration
- Corresponds to CompactPCI spec. 2.0 rev. 3.0, IEC 60 297-3-101, - 102, - 103

HeiPac CPCI-Systems



3 U, 5 slots/4U, 7 slots horizontal
Order no. see page 232

Applications

Configuration of 19" industrial computer systems according to CompactPCI specification for

- Telecommunication
- Industrial Automation

Technical specifications

- 482.6 mm (19") rack-mount system for horizontal mounting of double Eurocards
- 3 U, 4 U, 405 mm deep
- Aluminium coated
- Including backplane, power supply and fan unit on the rear panel
- Completely assembled, pre-wired and tested
- Horizontal installation space for double Eurocards: 5 and 7 slots
- Installation of CPCI boards according to CompactPCI spec. 2.0 rev. 3.0

Benefits at a glance

- Horizontal installation of double Eurocards
- EMC and ESD protection
- Completely assembled, pre-wired and tested
- Well-directed air ducting from front to rear by fans in the rear panel
- Keyable guide rails
- Corresponds to CompactPCI spec. 2.0 rev. 3.0, IEC 60 297-3-101, - 102, - 103

HeiPac CPCI-Systems



7 U, 8 slots
Order no. see page 234

Applications

Configuration of 19" industrial computer systems according to CompactPCI specification for

- Telecommunication
- Industrial Automation

Technical specifications

- 482.6 mm (19") rack-mount system for vertical mounting of double Eurocards
- 7 U, 405 mm deep
- Aluminium coated
- Including backplane, power supply and fan unit on the rear panel
- Completely assembled, pre-wired and tested
- Installation space for boards: 8 slots
- Installation of CPCI boards according to CompactPCI spec. 2.0 rev. 3.0

Benefits at a glance

- Vertical installation of double Eurocards
- EMC and ESD protection
- Completely assembled, pre-wired and tested
- Well-directed air flow from front to rear by DC fans on the rear panel
- Keyable guide rails
- Conforms to CompactPCI spec. 2.0 rev. 3.0, IEC 60 297-3-101, - 102, - 103

HeiPac CPCI-Systems



4 U/7 U, 8 slots
Order no. see page 233

Applications

Configuration of 19" industrial computer systems according to CompactPCI specification for

- Telecommunication
- Industrial Automation

Technical specifications

- 482.6 mm (19") rack-mount system for vertical mounting of Eurocards/double Eurocards
- 4 U and 7 U, 405 mm deep
- Aluminium coated
- Including backplane and power supply
- Fan unit with 3 DC fans
- Completely assembled, pre-wired and tested
- Installation space for Eurocards/double Eurocards: 8 slots
- Installation of CPCI boards according to CompactPCI spec. 2.0 rev. 3.0

Benefits at a glance

- Vertical installation of Eurocards/double Eurocards
- EMC and ESD protection
- Completely assembled, pre-wired and tested
- Fan unit provides directed air flow from bottom to top
- Keyable guide rails
- Conforms to CompactPCI spec. 2.0 rev. 3.0, IEC 60 297-3-101, - 102, - 103

HeiPac CPCI-Systems



9 U, 8 slots with HeiCool and Rear I/O
Order no. see page 235

Applications

Configuration of 19" industrial computer systems according to CompactPCI specification for

- Telecommunication
- Industrial Automation

Technical specifications

- 482.6 mm (19") rack-mount system for vertical mounting of double Eurocards
- 9 U, 290.5 mm deep, on the rear side for I/O modules
- Aluminium coated
- Including backplane, power supply and 2 radial fans HeiCool (204 m3/h)
- Completely assembled, pre-wired and tested
- Installation space for boards: 8 slots
- Installation of CPCI boards according to CompactPCI spec. 2.0 rev. 3.0


Benefits at a glance

- Vertical installation of double Eurocards
- EMC and ESD protection
- Completely assembled, pre-wired and tested
- Well-directed air flow from front to rear
- Rear I/O
- Keyable guide rails
- Effective ventilation by 2 radial fans HeiCool (204 m3/h)
- Conforms to CompactPCI spec. 2.0 rev. 3.0, IEC 60 297-3-101, - 102, - 103

SYSTEM PLATFORMS

RACK-MOUNT SYSTEMS FOR CompactPCI

HeiPac 3 U, 5 slots/4 U, 7 slots horizontal

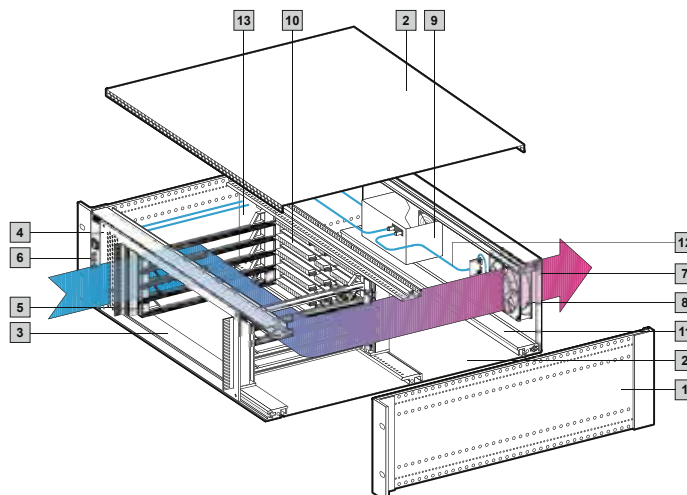

Technical specifications

Subrack, 405 mm deep, for installation in 482.6 mm (19") enclosures or cases. Prepared to accommodate CPCI boards and drives. Includes MPS Monitoring (see pages 255 ff.) Complies with IEC 60 297-3-101, -102, -103. Fully assembled, pre-wired and tested.

Illustration

MPS system 3 U for CPCI

| U | 3 | 4 | Page |
|--|---|-----------------|------|
| Side panel depth mm | 405 | 405 | |
| Wiring space (depth in mm) | 210 | 210 | |
| For PCB | 6 U x 160 mm | 6 U x 160 mm | |
| MPS system Model No. | 9910.944 | 9910.945 | |
| Mechanical supply includes | | | |
| Description | Material | Qty. | |
| 1 HeiPac basic subrack system (side panels, horizontal rails, flanges, EMC gaskets) | Aluminium, clear-chromated/stainless steel | 1 | 1 |
| 2 Top and bottom covers, solid | Aluminium | 2 | 2 |
| 13 Air partition | Aluminium | 1 | 1 |
| EMC shielding plate for fan | Aluminium, clear-chromated | 1 | 1 |
| 3 Horizontal mounting kit | Aluminium, clear-chromated | 1 | 1 |
| 4 Trim frame for horizontal mounting kit | 2.5 mm aluminium, clear-chromated | 1 | 1 |
| 5 Plastic guide rails, keyable | Polycarbonate UL 94-V0 | 8 | 12 |
| Plastic guide rails, keyable, red | Polycarbonate | 2 | 2 |
| 6 EMC front panel 3 U/5 HP for MPS monitoring | 2.5 mm aluminium, clear-chromated | 1 | - |
| EMC front panel 4 U/5 HP for MPS monitoring | 2.5 mm aluminium, clear-chromated | - | 1 |
| 7 EMC rear panel 3 U/84 HP with fan and connector cut-out | 2.5 mm aluminium, clear-chromated | 1 | - |
| EMC rear panel 4 U/84 HP with fan and connector cut-out | 2.5 mm aluminium, clear-chromated | - | 1 |
| Electrical/electronic supply includes | | | |
| Description | Technical specifications | | |
| 8 DC fan | 12 V DC, 48 m ³ /h, per fan (UL, CSA, VDE) optionally speed-controlled | 1 | 1 |
| 9 Power supply unit ATX, PS/2 | 300 W | 1 | 1 |
| 10 CPCI backplane | 6.5 U, 5 Slot | 1 | - |
| CPCI backplane | 6.5 U, 7 Slot | - | 1 |
| LED display module for MPS monitoring | for 3.3 V, +5 V, ±12 V, fan failure | 1 | 1 |
| 11 Fan module | - | 1 | 1 |
| 12 DC cable harness | - | • | • |
| Controller module | with interface for RS-232 and CMC-TC | 1 | 1 |
| Fan module for AC fan | - | • | • |

• Included with the supply.

HeiPac 4 U/7 U, 8 slots




Technical specifications

Subrack, 405 mm deep, for installation in 482.6 mm (19") enclosures or cases. Prepared to accommodate CPCI boards and drives.

Includes MPS Monitoring (see pages 255 ff.)

Complies with IEC 60 297-3-101, -102, -103.

Fully assembled, pre-wired and tested.

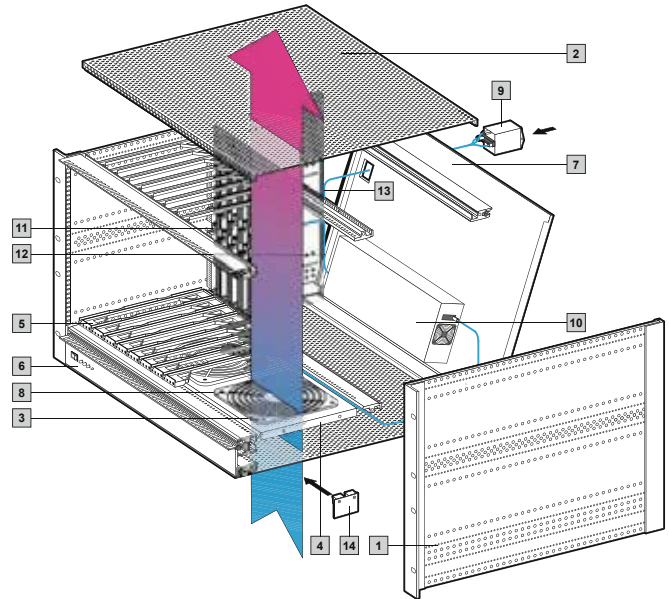

Illustration

MPS system 7 U for CPCI


| U | | 4 (3 + 1) | 7 (6 + 1) | Page |
|--|---|--|-----------------|------|
| | Side panel depth mm | 405 | 405 | |
| | Wiring space (depth in mm) | 210 | 210 | |
| | For PCB | 3 U x 160 mm | 6 U x 160 mm | |
| | MPS system Model No. for CPCI | 9910.946 | 9910.948 | |
| Mechanical supply includes | | | | |
| | Description | Material | Qty. | |
| 1 | HeiPac basic subrack system (side panels, horizontal rails, flanges, EMC gaskets) | Aluminium, clear-chromated/stainless steel | 1 | - |
| 2 | Top and bottom covers, vented | Aluminium | 2 | 161 |
| 3 | Finger guard | Polyamide | 3 | 193 |
| 4 | Fan mounting plate | 1 mm aluminium, anodised | 1 | 186 |
| 5 | Plastic guide rails, keyable | Polycarbonate UL 94-V0 | 14 | 155 |
| | Plastic guide rails, keyable, red | Polycarbonate | 2 | 155 |
| 6 | EMC front panel 1 U/84 HP for MPS monitoring | 2.5 mm aluminium, clear-chromated | 1 | - |
| | EMC rear panel 4 U/84 HP, horizontally hinged with connector cut-out | 2.5 mm aluminium, clear-chromated | 1 | - |
| 7 | EMC rear panel 7 U/84 HP, horizontally hinged with connector cut-out | 2.5 mm aluminium, clear-chromated | - | 1 |
| Electrical/electronic supply includes | | | | |
| | Description | Technical specifications | | |
| 8 | DC fan | 24 V DC, 140 m ³ /h, per fan (VDE, UL, CSA) optionally speed-controlled | 3 | 3 |
| 9 | IEC filtered mains inlet | 6 A (VDE, UL, CSA) | 1 | 1 |
| 10 | Open frame power supply | 400 W | - | 1 |
| | Power supply unit ATX PS/2 | 300 W | 1 | - |
| | CPCI backplane | 3.5 U, 8 Slot | 1 | - |
| 11 | CPCI backplane | 6.5 U, 8 Slot | - | 1 |
| | LED display module for MPS monitoring | for 3.3 V, +5 V, ±12 V, fan failure | 1 | 1 |
| 12 | DC cable harness | - | • | • |
| 13 | AC cable harness | - | - | • |
| 14 | Fan module for DC fan | - | 1 | 1 |
| | Controller module | with interface for RS-232 and CMC-TC | 1 | 1 |

• Included with the supply.

SYSTEM PLATFORMS

RACK-MOUNT SYSTEMS FOR CompactPCI

HeiPac 7 U, 8 slots

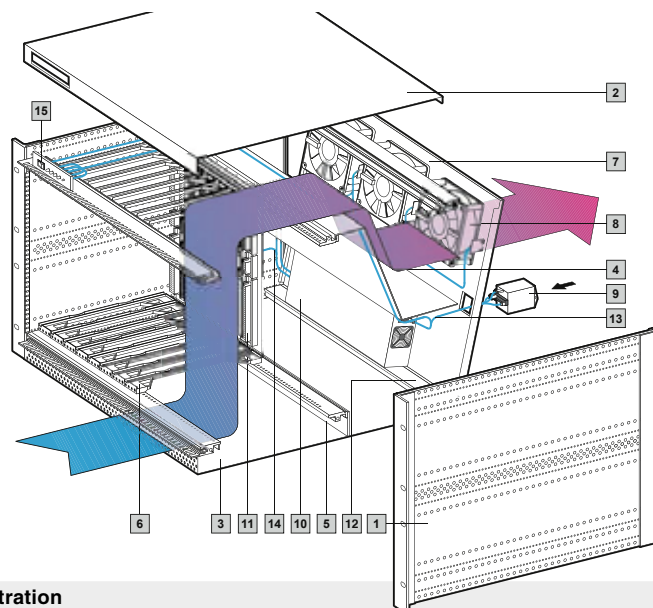

Technical specifications

Subrack, 405 mm deep, for installation in 482.6 mm (19") enclosures or cases. Prepared to accommodate CPCI boards and drives.

Includes MPS Monitoring (see pages 255 ff.)

Complies with IEC 60 297-3-101, -102, -103.

Fully assembled, pre-wired and tested.

Illustration

MPS system 7 U for CPCI

| | | |
|-----------------------------|----------------------|------|
| U | 7 (6 + 2 x ½) | Page |
| Side panel depth mm | 405 | |
| Wiring space (depth in mm) | 210 | |
| For PCB | 6 U x 160 mm | |
| MPS system Model No. | 9910.947 | |

Mechanical supply includes


| Description | Material | Qty. | |
|--|--|------|-----|
| 1 HeiPac basic subrack system (side panels, horizontal rails, flanges, EMC gaskets) | Aluminium, clear-chromated/stainless steel | 1 | - |
| 2 Cover with ½ U edge fold and cut-outs for LED/switches | Aluminium | 1 | 163 |
| 3 Bottom cover with ½ U edge fold, ventilated at the front | Aluminium | 1 | 163 |
| EMC shielding plate for fan | Aluminium, clear-chromated | 3 | 193 |
| 4 Air baffle | Aluminium | 1 | 187 |
| 5 Air block panel ½ U | Epoxy | 1 | 187 |
| 6 Plastic guide rails, keyable | Polycarbonate UL 94-V0 | 14 | 155 |
| Plastic guide rails, keyable, red | Polycarbonate | 2 | 155 |
| 7 EMC rear panel 7 U, horizontally hinged with connector cut-out | 2.5 mm aluminium, clear-chromated | 1 | - |

Electrical/electronic supply includes

| Description | Technical specifications | | |
|---|--|---|-----|
| 8 DC fan | 12 V DC, 140 m³/h, per fan (VDE, UL, CSA) optionally speed-controlled | 3 | 191 |
| 9 IEC filtered mains inlet | 6 A (VDE, UL, CSA) | 1 | 257 |
| 10 Open frame power supply | 400 W | 1 | - |
| 11 CPCI backplane | 3.5 U, 8 Slot | 1 | 238 |
| 12 Fan module for DC fan | - | 1 | - |
| 13 AC cable harness | - | • | - |
| 14 DC cable harness | - | • | - |
| 15 LED display module for MPS monitoring | for 3.3 V, +5 V, ±12 V, fan failure | 1 | - |
| Controller module | with interface for RS-232 and CMC-TC | 1 | - |

• Included with the supply.

HeiPac 9 U, 8 slots, with HeiCool radial fan

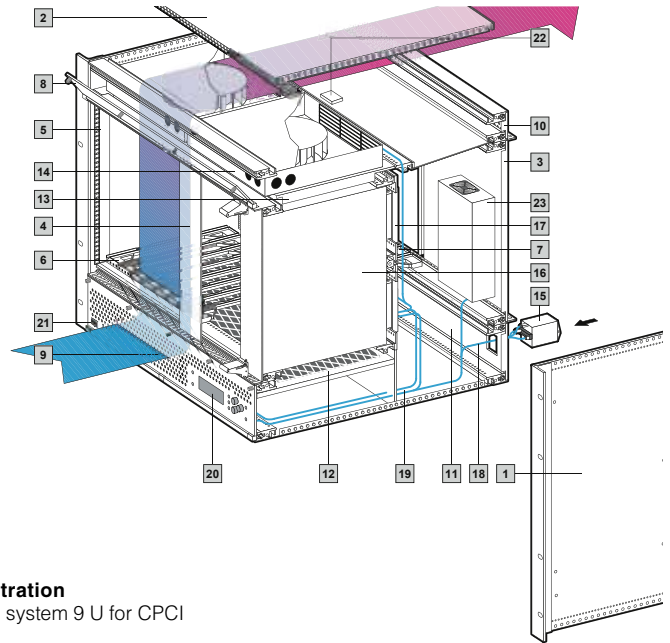

Technical specifications

Subrack, 290.5 mm deep, for installation in 482.6 mm (19") enclosures or cases. Prepared to accommodate CPCI boards and drives.

Includes MPS monitoring (see pages 255 ff.)

Complies with IEC 60 297-3-101, -102, -103.

Fully assembled, pre-wired and tested.

Illustration

MPS system 9 U for CPCI

| | | |
|-----------------------------|-----------------------|------|
| U | 9 (6 + 2 x 1½) | Page |
| Side panel depth mm | 290.5 | |
| Wiring space (depth in mm) | 85.5 | |
| For PCB | 6 U x 160 mm | |
| MPS system Model No. | 9909.483 | |

Mechanical supply includes


| Description | Material | Qty. | |
|--|--|------|-----|
| 1 HeiPac basic subrack system (side panels, horizontal rails, flanges, EMC gaskets) | Aluminium, clear-chromated/stainless steel | 1 | - |
| 2 Top and bottom covers | Aluminium | 2 | 162 |
| 3 EMC rear panel 6 U/28 HP + 8 HP | 2.5 mm aluminium, clear-chromated | 1 | - |
| 4 EMC front panel | 2.5 mm aluminium, clear-chromated | 1 | 179 |
| 5 EMC contact strip | Aluminium, clear-chromated | 1 | 146 |
| 6 Plastic guide rails, keyable | Polycarbonate UL 94-V0 | 14 | 155 |
| Plastic guide rails, keyable, red | Polycarbonate | 2 | 155 |
| 7 Guide rails for I/O transition modules | Polycarbonate UL 94-V0 | 16 | 156 |
| Guide rails, keyable, green, for power supply | Polycarbonate | 2 | 155 |
| 8 Front panel 1½ U/84 HP, horizontally hinged | 2.5 mm aluminium, clear-chromated | 1 | - |
| 9 Front panel 1½ U/84 HP, vented, horizontally hinged, for MPS monitoring | 2.5 mm aluminium, clear-chromated | 1 | - |
| 10 EMC rear panel 1½ U/84 HP, vented | 2.5 mm aluminium, clear-chromated | 1 | - |
| 11 EMC rear panel 1½ U/84 HP with connector cut-out | 2.5 mm aluminium, clear-chromated | - | - |
| 12 Filter mat 84 HP, 160 mm, for slide-in attachment | - | 1 | - |
| 13 Mounting plate for HeiCool | 1 mm sheet steel, zinc-plated, passivated | 1 | - |

Electrical/electronic supply includes

| Description | Technical specifications | | |
|--|--------------------------------------|---|-----|
| 14 HeiCool DC fan, individually removable including fault alarm signal, speed control | 24 V DC, 204 m3/h, 48 W | 2 | - |
| 15 IEC filtered mains inlet | 6 A (VDE, UL, CSA) | 1 | 191 |
| 16 Power supply, plug-in, 6 U/8 HP | 350 W | 1 | 257 |
| CPCI backplane | 6,5 U, 8 Slot | 1 | 238 |
| 17 CPCI backplane for power supply | - | 1 | - |
| 18 AC cable harness | - | • | - |
| 19 DC cable harness | - | • | - |
| 20 Display module | for 3.3 V, +5 V, ±12 V, fan failure | 1 | - |
| 21 Mains switch | - | 1 | - |
| 22 Monitoring module for HeiCool | - | 1 | - |
| 23 Power supply for HeiCool | - | 1 | - |
| Controller module | with interface for RS-232 and CMC-TC | 1 | - |

• Included with the supply.

Backplanes, technical specifications

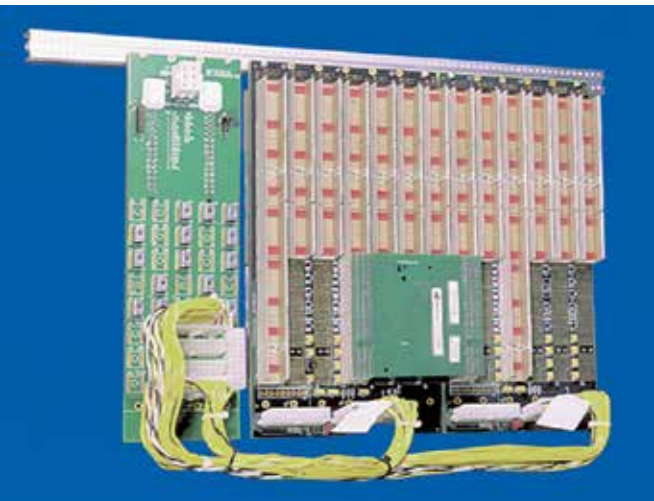

HEITEC offers an extensive range of powerful backplanes for CompactPCI.

- Modular construction facilitates expansion up to a maximum of 21 slots
- Connection between segments via CPCI or H.110 bridge modules
- Power input via ATX-compatible connectors or screw terminal
- Additional 2 x 3 Mate-N-Lock connector for 48 V with H.110 backplane
- Optional development of customer-specific Monolithic backplanes
- 8 layer multi-layer
- System slot on right (left upon request), spray-finished

Modular assembly

The backplanes in 32 or 64-bit versions allow the configuration of CPCI systems from 2 to 21 slots. This is possible due to the modular design of the backplanes and connection of the individual segments via CPCI or H.110 bridge modules. Each backplane segment contains between 2 and 8 slots and operates in stand-alone mode in conjunction with a CPU board and a power supply unit.

For assembling larger systems, several segments may be joined together via PCI bridge modules fitted at the rear. In such cases, only one of the segments will run in the system slot with a CPU board. The remaining segments will have a subordinate status without CPU boards. However, the first slot on the right of the backplane is available for a standard 32 or 64 bit CompactPCI host CPU.

Technical specifications

CPU slot

A single 3 U or 6 U CPU board with 32 or 64 bits is required for each system. The system slot on the right-hand side ensures that 2-slot or wider system boards do not conceal other slots, thus rendering them unusable.

Available slots

Each backplane contains two to eight 3 U or 6 U slots (32 or 64 bit).

Data transfer rate

132/264 MBytes for 32/64 bit version
 +5 V, 33 MHz PCI bus interface
 264/512 MBytes for 32/64 bit version
 +3.3 V, 66 MHz (max. 5 slots) PCI bus interface

PCI bridges

Single backplanes do not require bridges. For each additional backplane, however, a bridge fitted at the rear is required.

Power supply

Voltage supply via one or more ATX connectors

Control connector

Each backplane has a control connector where +3.3, +5, ±12 V voltages may be picked off, e.g. for the connection of power LEDs

I/O-Module für J3 – J5

I/O modules can be connected at the rear of each slot.

Standards

- PCI 2.1 (PCI specification)
- PICMG 2.0 (CompactPCI spec.)
- PICMG 2.1 (hot swap spec.)
- IEEE 1101.1, mechanics
- IEEE 1101.10, mechanics
- IEEE 1101.11, mechanics

32-bit pin assignment

P2 connector⁹⁾

| PIN | Z ⁶⁾ | A | B | C | D | E | F |
|-----|-----------------|-------------------|-------------------|-------------------|-------------------|-------------------|-----|
| 22 | GND | GA4 ⁵⁾ | GA3 ⁵⁾ | GA2 ⁵⁾ | GA1 ⁵⁾ | GA0 ⁵⁾ | GND |
| 21 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 20 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 19 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 18 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 17 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 16 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 15 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 14 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 13 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 12 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 11 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 10 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 9 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 8 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 7 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 6 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 5 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 4 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 3 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 2 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |
| 1 | GND | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | BP(I/O) | GND |

P1 connector⁹⁾

| PIN | Z ⁶⁾ | A | B | C | D | E | F | |
|---------|-----------------|----------|----------|------------------------|---------------------|----------|-----|-----|
| 25 | GND | 5 V | REQ64# | ENUM# | 3.3 V | 5 V | GND | |
| 24 | GND | AD (1) | 5 V | V(I/O) ³⁾ | AD(O) | ACK64# | GND | |
| 23 | GND | 3.3 V | AD (4) | AD (3) | 5 V | AD (2) | GND | |
| 22 | GND | AD (7) | GND | 3.3 V | AD (6) | AD (5) | GND | |
| 21 | GND | 3.3 V | AD (9) | AD (8) | M66EN ³⁾ | C/BE(0)# | GND | |
| 20 | GND | AD (12) | GND | V(I/O) ³⁾ | AD (11) | AD (10) | GND | |
| 19 | GND | 3.3 V | AD (15) | AD (14) | GND | AD (13) | GND | |
| 18 | GND | SERR# | GND | 3.3 V | PAR | C/BE(1)# | GND | |
| 17 | GND | 3.3 V | SDONE | SBQ# | GND | PERR# | GND | |
| 16 | GND | DEVSEL | GND | V(I/O) ¹⁾³⁾ | STOP# | LOCK# | GND | |
| 15 | GND | 3.3 V | FRAME# | IRDY | GND ²⁾ | TRDY# | GND | |
| 12 - 14 | KEY AREA | | | | | | | GND |
| 11 | GND | AD (18) | AD (17) | AD (16) | GND | C/BE(2)# | GND | |
| 10 | GND | AD (21) | GND | 3.3 V | AD (20) | AD (19) | GND | |
| 9 | GND | C/BE(3)# | IDSEL | AD (23) | GND | AD (22) | GND | |
| 8 | GND | AD (26) | GND | V(I/O) ³⁾ | AD (25) | AD (24) | GND | |
| 7 | GND | AD (30) | AD (29) | AD (28) | GND | AD (27) | GND | |
| 6 | GND | REQ# | GND | 3.3 V | CLK | AD (31) | GND | |
| 5 | GND | BRSVP1A5 | BRSVP1B5 | RST# | GND | GNT# | GND | |
| 4 | GND | BRSVP1A4 | GND | V(I/O) ³⁾ | INTP | INTS | GND | |
| 3 | GND | INTA# | INTB# | INTC# | 5 V | INTD# | GND | |
| 2 | GND | TCK | 5 V | TMS | TDO | TDI | GND | |
| 1 | GND | 5 V | - 12 V | TRST# | + 12 V | 5 V | GND | |

32-bit and 64-bit backplane – Technical specifications:

The CPCI specifications define both 32-bit and 64-bit versions. Both versions may be implemented on a 3 U daughterboard. However, the 32-bit version allows the complete P2/J2 connector to be used for user-defined I/O signals (slots 2 – 8). Slot 1 (system slot) uses separate P2/J2 pins for functions such as clock, arbitration, (grant/requests) and other system functions. These pins are printed in bold in the table. In 32-bit systems the P2/J2 connection may optionally be populated at the rear with 16 mm long pins and a transfer frame. Signals can be picked off or I/O boards connected at the rear.

64-bit CompactPCI pin assignments – Technical specifications:

With the 64-bit CompactPCI, both P1 and P2 connectors are fully assigned with signals. User-defined I/O signal pins are not available. I/O signals are only available with 6 U boards on connectors P3, P4 and P5.

64-bit pin assignment

P2 connector⁹⁾

| PIN | Z ⁷⁾ | A | B | C | D | E | F |
|-----------------|-----------------|----------------------|-------------------|----------------------------|-------------------|-------------------|-----|
| 22 | GND | GA4 ⁶⁾ | GA3 ⁶⁾ | GA2 ⁶⁾ | GA1 ⁶⁾ | GA0 ⁶⁾ | GND |
| 21 | GND | CLK6 | GND | RSV | RSV | RSV | GND |
| 20 | GND | CLK5 | GND | RSV | GND ⁵⁾ | RSV | GND |
| 19 | GND | GND | GND ⁵⁾ | RSV | RSV | RSV | GND |
| 18 | GND | BRSVP2A18 | BRSVP2B18 | BRSVP2C18 | GND ⁵⁾ | BRSVP2E18 | GND |
| 17 | GND | BRSVP2A17 | GND ⁵⁾ | PRST# | REQ6# | GNT6# | GND |
| 16 | GND | BRSVP2A16 | BRSVP2B16 | DEG# | GND | BRSVP2E16 | GND |
| 15 | GND | BRSVP2A15 | GND | FAL# | REQ5# | GNT5# | GND |
| 14 | GND | AD (35) | AD (34) | AD (33) | GND | AD (32) | GND |
| 13 | GND | AD (38) | GND | V(I/O) ³⁾ | AD (37) | AD (36) | GND |
| 12 | GND | AD (42) | AD (41) | AD (40) | GND | AD (39) | GND |
| 11 | GND | AD (45) | GND | V(I/O) ³⁾ | AD (44) | AD (43) | GND |
| 10 | GND | AD (49) | AD (48) | AD (47) | GND | AD (46) | GND |
| 9 | GND | AD (52) | GND | V(I/O) ³⁾ | AD (51) | AD (50) | GND |
| 8 | GND | AD (56) | AD (55) | AD (54) | GND | AD (53) | GND |
| 7 | GND | AD (59) | GND | V(I/O) ³⁾ | AD (58) | AD (57) | GND |
| 6 | GND | AD (63) | AD (62) | AD (61) | GND | AD (60) | GND |
| 5 | GND | C/BE(5)# | GND | V(I/O) ³⁾ | C/BE(4)# | PAR64 | GND |
| 4 | GND | V(I/O) ³⁾ | BRSVP2B4 | C/BE(7)# | - | C/BE(6)# | GND |
| 3 ³⁾ | GND | CLK4 | GND | GNT3# | - | GNT4# | GND |
| 2 ³⁾ | GND | CLK2 | CLK3 | SYSEN#⁴⁾ | - | REQ3# | GND |
| 1 ³⁾ | GND | CLK1 | GND | REQ1# | - | REQ2# | GND |

P1 connector⁹⁾

| PIN | Z ⁷⁾ | A | B | C | D | E | F | |
|---------|-----------------|----------|---------|------------------------|-----------------------|----------|-----|-----|
| 25 | GND | 5 V | REQ64# | ENUM# | 3.3 V | 5 V | GND | |
| 24 | GND | AD (1) | 5 V | V(I/O) ³⁾ | AD(O) | ACK64# | GND | |
| 23 | GND | 3.3 V | AD (4) | AD (3) | 5 V | AD (2) | GND | |
| 22 | GND | AD (7) | GND | 3.3 V | AD (6) | AD (5) | GND | |
| 21 | GND | 3.3 V | AD (9) | AD (8) | M66EN ⁴⁾⁵⁾ | C/BE(0)# | GND | |
| 20 | GND | AD (12) | GND | V(I/O) ³⁾ | AD (11) | AD (10) | GND | |
| 19 | GND | 3.3 V | AD (15) | AD (14) | GND | AD (13) | GND | |
| 18 | GND | SERR# | GND | 3.3 V | PAR | C/BE(1)# | GND | |
| 17 | GND | 3.3 V | SDONE | SBQ# | GND | PERR# | GND | |
| 16 | GND | DEVSEL# | GND | V(I/O) ¹⁾³⁾ | STOP# | LOCK# | GND | |
| 15 | GND | 3.3 V | FRAME# | IRDY# | GND ²⁾³⁾ | TRDY# | GND | |
| 12 - 14 | KEY AREA | | | | | | | GND |
| 11 | GND | AD (18) | AD (17) | AD (16) | GND | C/BE(2)# | GND | |
| 10 | GND | AD (21) | GND | 3.3 V | AD (20) | AD (19) | GND | |
| 9 | GND | C/BE(3)# | IDSEL | AD (23) | GND | AD (22) | GND | |
| 8 | GND | AD (26) | GND | V(I/O) | AD (25) | AD (24) | GND | |
| 7 | GND | AD (30) | AD (29) | AD (28) | GND | AD (27) | GND | |
| 6 | GND | REQ# | GND | 3.3 V | CLK | AD (31) | GND | |
| 5 | GND | BRSVA5 | BRSVB 5 | RST# | GND | GNT# | GND | |
| 4 | GND | BRSVA4 | GND | V(I/O) | INTP | INTS | GND | |
| 3 | GND | INTA# | INTB# | INTC | 5 V | INTD# | GND | |
| 2 | GND | TCK | 5 V | TMS | TDO | TDI | GND | |
| 1 | GND | 5 V | - 12 V | TRST# | + 12 V | 5 V | GND | |

The signals printed in bold are only assigned in the system s lot

1) "Early mate" pin 2) "Late mate" pin 3) +3.3 V or 5 V 4) Earthed with system slot 5) GND for 33 MHz backplane, bussed in 66 MHz systems
 6) Each slot may have its own address code (see CPCI specifications) 7) Not for daughtercards 8) Not for CPCI cards after version 1.0
 9) All HEITEC standard CPCI backplanes are designed for 64-bit applications on the layout side. With 32-bit versions, the P2/J2 connectors are populated on request.

SYSTEM PLATFORMS

CompactPCI – BACKPLANES

Backplanes 3 U



Material

Fibreglass epoxy to IEC 60 249 (type FR4)

Supply includes

Backplane, fully populated

Backplanes 3 U for low profile bridge

| Slot | Design | Model No. | |
|------|--------|-----------------|-----------------|
| | | 32 Bit | 64 Bit |
| 2 | S | 3689.300 | 3689.307 |
| 3 | SE | 3689.301 | 3689.308 |
| 4 | SBME | 3689.302 | 3689.309 |
| 5 | SBME | 3689.303 | 3689.310 |
| 6 | SBME | 3689.304 | 3689.311 |
| 7 | SBE | 3689.305 | 3689.312 |
| 8 | S | 3689.306 | 3689.313 |

S = Stand alone
 B = Beginning segment
 M = Middle segment
 E = Ending segment

| | |
|-----------------------------|--|
| Number of layers | 8, 10 (for 3 U) |
| Layer structure | 2 GND Layer |
| PCB thickness | 3.2 mm |
| Data transfer rate | 132/264 MBytes/32, 64 Bit |
| Power inlets | 3 U: Via screws and busbars |
| Control connector | +3,3 V, +5 V, +12 V, -12 V |
| VI/O (3 U) | Adjustable to +5 V or +3.3 V |
| CPU slot | on right (left upon request) |
| Standards | PCI 2.1 (PCI Spec.) PICMG 2.0 (CompactPCI) PICMG 2.1 (hot swap) IEEE 1101.1/10/11 |
| Installation height | 3 U |
| Distance between slots | 4 HP |
| Connectors | J1, J2 32 or 64 bit No rear I/O |
| Operating temperature range | 0° - 70°C |
| Relative humidity | 90 %, non-condensing |
| Geographic addressing | 64-bit versions |

Backplanes 6 U



Material

Fibreglass epoxy to IEC 60 249 (type FR4)

Supply includes

Backplane, fully populated

Backplanes 6 U for low profile bridge

| Slot | Design | Model No. | |
|------|--------|-----------------|-----------------|
| | | 32 Bit | 64 Bit |
| 2 | S | 3689.314 | 3689.321 |
| 3 | SE | 3689.315 | 3689.322 |
| 4 | SBME | 3689.316 | 3689.323 |
| 5 | SBME | 3689.317 | 3689.324 |
| 6 | SBME | 3689.318 | 3689.325 |
| 7 | SBE | 3689.319 | 3689.326 |
| 8 | S | 3689.320 | 3689.327 |

S = Stand alone

B = Beginning segment

M = Middle segment

E = Ending segment

| | |
|-----------------------------|--|
| Number of layers | 8, 10 (for 6 U) |
| Layer structure | 2 GND Layer |
| PCB thickness | 3.2 mm |
| Data transfer rate | 132/264 MBytes/32, 64 Bit |
| Power inlets | 6 U: Via screws and busbars |
| Control connector | +3,3 V, +5 V, +12 V, -12 V |
| VI/O (6 U) | Adjustable to +5 V or +3.3 V |
| CPU slot | on right (left upon request) |
| Standards | PCI 2.1 (PCI Spec.) PICMG 2.0 (CompactPCI) PICMG 2.1 (hot swap) IEEE 1101.1/10/11 |
| Installation height | 6 U |
| Distance between slots | 4 HP |
| Connectors | J1, J2 32 or 64 bit J3, J4, J5 for rear I/O (64 bit only) |
| Operating temperature range | 0° - 70°C |
| Relative humidity | 90 %, non-condensing |
| Geographic addressing | 64-bit versions |

SYSTEM PLATFORMS

CompactPCI – BACKPLANES

Power supply board 3 U/3.5 U



- Board 3U/3,5 U, 8 HP, 16 HP, 24 HP
- For use in conjunction with HEITEC CPCI back planes
- Accomodation of 1/2/3 power supplies up to 250 W each
- AC/DC connection is made via two 2 x 3-pole connectors
- Outgoing voltages to supply one or more CPCI backplanes are available at ATX-compatible connectors
- Complies with PICMG 2.0, PICMG 2.11

Technical specifications

Accommodation of 1/2/3 CPCI power supplies of up to 250 W.

The second power supply unit may be used for redundancy (with power distribution) or, via parallel connection, to increase the current.

Input voltages:

- AC input via 2 x 3-pole AMP Mate-N-Lock (AMP # 350732-1), connector J12
- Connected via pin 45, 46, 47, type Positronic
- Maximum current load per pin is 25 A, matching counter-connector for cable harness AMP # 350715
- DC input via 2 x 3-pole AMP Mate-N-Lock (AMP # 350732-1), connector J5 connected via pin 46, 47, type Positronic
- Maximum current load per pin is 25 A, matching counter-connector for cable harness AMP # 350715
- Output voltage:
- Three 20-pole ATX-compatible connectors for ATX cable harness (connection of power supply board to CPCI backplane)

Material


Fibreglass epoxy to IEC 60 249 (FR4)

Supply includes

Board, fully populated

| Description | HP | Model No. |
|--|----|-----------------|
| 3 U for 1 x plug-in power supply with Positronic connector, 47-pin | 8 | 9905.105 |
| 3 U Board for 3 x plug-in power supply with Positronic connector, 47-pin | 24 | 9904.131 |
| 3,5 U Board for 2 x plug-in power supply with Positronic connector, 47-pin | 16 | 3688.603 |
| ATX (12 ") cable harness | | 9810.337 |
| ATX (16 ") cable harness | | 3686.570 |
| ATX (19 ") cable harness | | 9810.338 |

HE = U
TE = HP

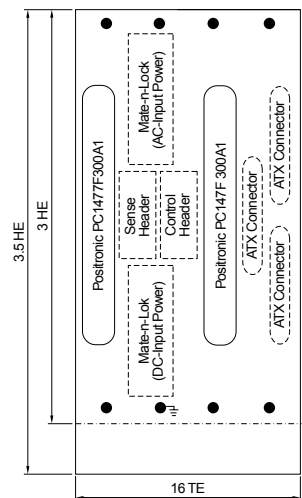

Power supply board 6 U/6.5 U, 8 HP



- Board 6 U/6.5 U, (0.5 U removable) 8 HP
- For use in conjunction with HEITEC CPCI backplanes 3.5 U, 6.5 U, H.110
- Accommodation of a power supply with up to 500 W
- AC/DC connection is made via 3-pole connectors
- Outgoing voltages to supply one or more CPCI backplanes are available at 3 ATX-compatible connectors or at special power terminals
- Complies with PICMG 2.0, PICMG 2.11

Technical specifications

Accommodation of a 6 U CPCI power supply of up to 500 W.

Input voltages:

- AC input via 3-pole AMP Mate-N-Lock connector max. current capacity per pin 25 A
- DC input via 3-pole AMP Mate-N-Lock connector Max. current capacity per pin 25 A Output voltage:
- Three 20-pole ATX-compatible connectors for ATX cable harness (connection of power supply board to CPCI backplane) and/or special power terminals

Material

Fibreglass epoxy to IEC 60 249 (FR4)

Supply includes


Board, fully populated

Note


Plug-type power supplies, see page 198

| Description | Model No. |
|--|-----------------|
| Board for 1 x plug-in power supply with Positronic connector, 47-pin | 3688.607 |
| ATX (12 ") cable harness | 9810.337 |
| ATX (16 ") cable harness | 3686.570 |
| ATX (20 ") cable harness | 9810.338 |

HE = U

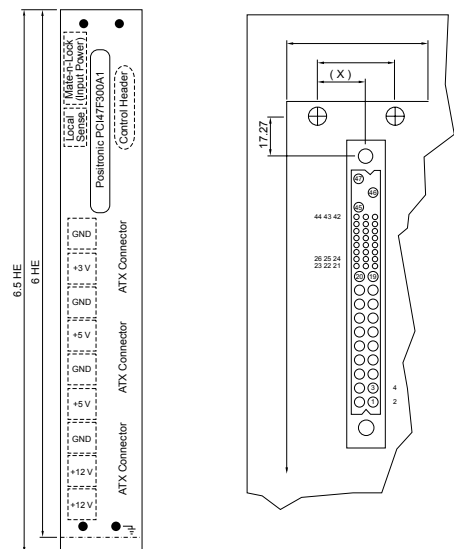

Power supply board 6 U/6.5 U, 16 HP

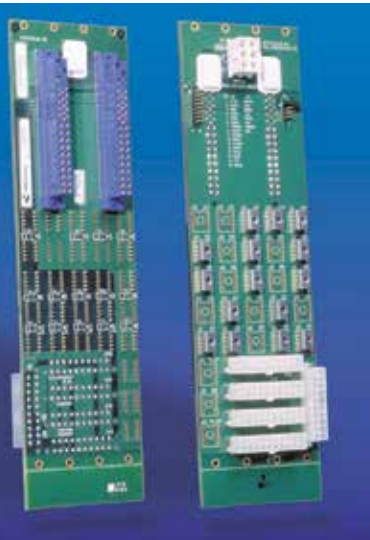

- Board 6 U/6.5 U, (0.5 U removable) 16 HP
- For use in conjunction with HEITEC CPCI backplanes 3.5 U and 6.5 U
- Accommodation of two power supplies with up to 500 W
- AC/DC connection is made via two 2 x 3-pole connectors
- Outgoing voltages to supply one or more CPCI backplanes are available at 5 ATX-compatible connectors or at special power terminals
- Complies with PICMG 2.0, PICMG 2.11

Technical specifications

Accommodation of 2 x 6 U CPCI power supplies of up to 500 W

Input voltages:

- AC input via 2 x 3-pole AMP Mate-N-Lock connector Max. current capacity per pin 25 A
 - DC input via 2 x 3-pole AMP Mate-N-Lock connector Max. current capacity per pin 25 A
- Output voltage:
- Five 20-pole ATX-compatible connectors for ATX cable harness (connection of power supply board to CPCI backplane)

Material

Fibreglass epoxy to IEC 60 249 (FR4)


Supply includes

Board, fully populated

Note

Plug-in power supplies, see page 198

| Description | Model No. |
|--|-----------------|
| Board for 2 x plug-in power supplies with Positronic connector, 47-pin | 3688.608 |
| ATX (12 ") cable harness | 9810.337 |
| ATX (16 ") cable harness | 3686.570 |
| ATX (20 ") cable harness | 9810.338 |

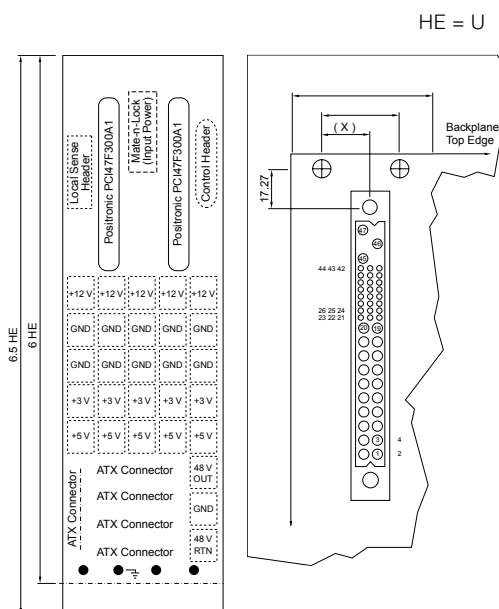

Power supply board 9U Monolithic with power supply connector



Material

Fibreglass epoxy to IEC 60 249 (FR4)

Supply includes

Board, fully populated

- S = Stand alone
- B = Beginning segment
- M = Middle segment
- E = Ending segment

| Slot | Positronic connector, 47 Pin | ATX | Model No. |
|-----------------|------------------------------|-----|-----------------|
| 2 ¹⁾ | 1 | 0 | 3689.329 |
| 4 | 2 | 1 | 3689.330 |
| 6 | 3 | 1 | 3689.331 |
| 8 | 4 | 1 | 3689.332 |



Systemslot on right 64 Bit with Rear I/O, V I/O: +5.0 V. H. 110 not connected with systemslot.

¹⁾without H.110

SYSTEM PLATFORMS

OVERVIEW RACK-MOUNT SYSTEMS FOR CompactPCI SERIAL

CPCI-S

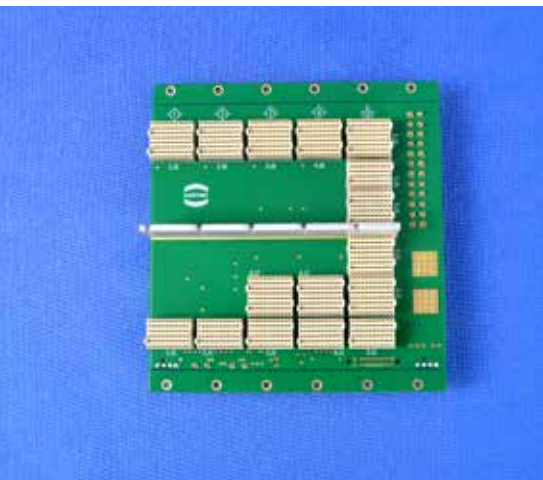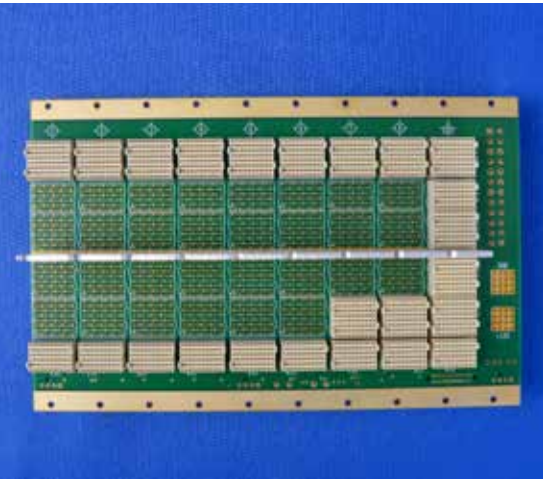

The CompactPCI serial specification is the logical extension of the CompactPCI standard.

This new standard replaces the existing CompactPCI parallel signals with rapid serial data links. The central supply voltage has also been raised to 12 V DC.

The mechanical specification of the CompactPCI serial standard completely matches that of the CompactPCI standard, with the exception of new backplane plug connectors. This means the dimensions for the plug-in cards, backplanes and even the front panels remain unchanged. The new standard makes it possible to produce backplanes with up to nine slots (one system and eight peripheral slots) and full-mesh Ethernet.

Upon request, HEITEC can also offer platforms with hybrid backplanes in accordance with the CompactPCI-Plus IO standard, to help customers make a step-by-step transition. CompactPCI system cards and CompactPCI serial periphery cards can be used in this connection.

Our range of services comprises complete plug & play systems including backplanes, power supply and effective cooling units.

The following subracks represent just a small selection of the available portfolio.

CompactPCI® Serial

HeiPac VM-A CPCI-S



NEW

9 SLOT CompactPCI® SERIAL platform for 3 U modules

Technical Summary

- Desktop/system case 310 mm deep
- Side panels of extruded aluminum profile painted in RAL 7035
- 4 U case with 3 U card cage and feet
- Incl. power supply and pluggable fan drawer
- Codable card guides
- 9-slot CompactPCI® serial backplane as per PICMG CPCI-S.0 R2.0
- Ethernet Full Mesh topology
- Alternatively, Ethernet Single Star option
- 2 Fat Pipes PCIeexpress
- CompactPCI® serial system slot on the right
- Alternative system slot possible on the left, rear transition module slots upon request
- Cooling with up to 3 fans in fan drawer – integrated cooling from bottom to top
- ATX 400W Power supply 100-240V
- Corresponds to IEC 60297-3-101, 102, 103 and IEEE 1101.1/10/11
- Completely mounted, prewired and tested
- EMC version
- Individual interior design and variable position of the backplane possible
- Simple handling via side grips

| Packs of | Order no. |
|----------|-----------|
| 1 | 9919.605 |

Customer Benefits

- Modular components allow flexible adaptation and customization
- System slot on the right enables use of an 8 HP CPU module without giving up one of the CompactPCI® serial slots
- Efficient cooling system via up to three fans in the fan drawer
- Variably deployable as desktop and rack-mount case
- Wide range of accessories
- Chassis with visual appeal – adaptable to suit individual color preferences

OVERVIEW RACK-MOUNT SYSTEMS FOR CompactPCI SERIAL

HeiPac Vario-A CPCI-S



NEW

5 SLOT CompactPCI® SERIAL platform
FOR 3 U modules

| Packs of | Order no. |
|----------|-----------|
| 1 | 9919.911 |

Technical Summary

- Subrack 250 mm deep
- 4 U subrack with 3 U card cage
- Clear-chromated aluminum
- Incl. power supply and axial fan – cooling from bottom to top
- Codable card guides
- 5-slot CompactPCI® serial backplane as per PICMG CPCI-S.0 R2.0
- Ethernet in Single Star topology
- Alternatively, Ethernet Full Mesh option
- 2 Fat Pipes PCIeexpress
- CompactPCI® serial system slot on the right
- Alternative system slot possible on the left, RTM upon request
- Scalable: project-related up to 8 slot CompactPCI® serial or hybrid backplane can be integrated
- Optional fanless usage (convection cooling)
- ATX power supply 100-240VAC with 204 W at 12 V
- Scalable: project-specific power supply, solutions with up to 2 plug-in redundant CompactPCI® serial power supplies possible
- Corresponds to IEC 60297-3-101, 102, 103 and IEEE 1101.1/10/11
- Completely mounted, prewired and tested
- EMC version

Customer Benefits

- Very cost-effective platform solution
- System slot on the right enables use of an 8 HP CPU module without giving up one of the CompactPCI® serial slots
- Variable number of slots – other backplanes can also be integrated at modest cost depending on the project, even for low unit quantities
- Efficient cooling system – fanless usage also possible depending on application
- Fast and easy assembly
- Modular components allow flexible adaptation and customization

HeiPac Vario VM-R CPCI-S



NEW

5 SLOT CompactPCI® SERIAL platform
for 3 U modules

| Packs of | Order no. |
|----------|-----------|
| 1 | 9919.912 |

Technical Summary

- Desktop/system case 250 mm deep
- Side panels of extruded aluminum profile painted in RAL 7035
- 4 U case with 3 U card cage
- Incl. power supply and two radial fans
- Codable card guides
- 5-slot CompactPCI® serial backplane as per PICMG CPCI-S.0 R2.0
- Ethernet in Star topology – alternatively, Ethernet Full Mesh option
- 2 Fat Pipes PCIeexpress
- CompactPCI® serial system slot on the right
- Alternative system slot possible on the left, RTM upon request
- Scalable: project-related up to 8 slot CompactPCI® serial or hybrid backplane can be integrated
- ATX power supply 100-240VAC with 204 W at 12 V
- Scalable: project-specific power supply, solutions with up to 2 plug-in redundant CompactPCI® serial power supplies possible
- Corresponds to IEC 60297-3-101, 102, 103 and IEEE 1101.1/10/11
- Completely mounted, prewired and tested
- EMC version

Customer Benefits

- Modular components allow flexible adaptation and customization
- System slot on the right enables use of an 8 HP CPU module without giving up one of the CompactPCI® serial slots
- Variable number of slots – other backplanes can also be integrated at modest cost depending on the project, even for low unit quantities
- Efficient cooling system from the lower front to upper rear using two radial fans
- Modular components allow flexible adaptation and customization
- Wide range of accessories
- Chassis with visual appeal – adaptable to suit individual color preferences

SYSTEM PLATFORMS

OVERVIEW RACK-MOUNT SYSTEMS FOR VMEbus

Slim-box Vario VME64x Systems



2 U, 4 U
Order no. on request

Applications

Configuration of 19" industrial computer systems according to VME specification for

- Process Control
- Traffic Management System
- Image Processing
- Industrial Automation

Technical specifications

- 482.6 mm (19") rack-mount system for horizontal mounting of front boards and rear I/O cards
- 1 U, 2 U, 3 U, 4 U, 300 mm deep
- Standard cooling from left to right side
- Sheet steel, spray-finished (black)
- Preconfigured systems including backplane and fan
- Completely assembled, pre-wired and tested
- Installation of VME64x boards according to VME specification

Benefits at a glance

- Horizontal installation of Eurocards/ double Eurocards
- Maximum installation with minimum space requirement
- 2/4/6/8 slots for 160 mm front and 80 mm rear boards
- Hot swap compatible power supply, AC or DC optionally
- EMC and ESD protection
- Completely assembled, pre-wired and tested
- Integrated cooling from left to right side
- Modular assembly ensures individual configuration
- Conforms to IEC 60 297-3-101,-102,-103

HeiPac VME/VME64x Systems



3 U, 5 slots/ 4 U, 7 slots horizontal
Order no. see page 246

Applications

Configuration of 19" industrial computer systems according to VME specification for

- Process Control
- Traffic Management System
- Image Processing
- Industrial Automation

Technical specifications

- 482.6 mm (19") rack-mount system for horizontal mounting of double Eurocards
- 3 U, 4 U, 405 mm deep
- Aluminium, clear-chromated
- Including backplane, power supply and rear fan
- Completely assembled, pre-wired and tested
- Horizontal installation space for double Eurocards: 5 and 7 slots
- Installation of VME- or VME64x boards according to VME specification

Benefits at a glance

- Horizontal installation of double Eurocards
- EMC and ESD protection
- Completely assembled, pre-wired and tested
- Well-directed air ducting from front to rear via fans in the rear panel
- Keyable guide rails
- Conforms to IEC 60 297-3-101,-102,-103

HeiPac VME/VME64x Systems



4 U/ 7 U, 12 slots
Order no. see page 247

Applications

Configuration of 19" industrial computer systems according to VME specification for

- Process Control
- Traffic Management System
- Image Processing
- Industrial Automation

Technical specifications

- 482.6 mm (19") rack-mount system for vertical mounting of Eurocards/double Eurocards
- 4 U and 7 U, 405 mm deep
- Aluminium, clear-chromated
- Including backplane and power supply
- Fan unit with 3 DC fans
- Completely assembled, pre-wired and tested
- Installation space for double Eurocards: 12 slots
- Installation of VME- or VME64x boards according to VME specification

Benefits at a glance

- Vertical installation of double Eurocards
- EMC and ESD protection
- Completely assembled, pre-wired and tested
- Fan module ensures well-directed air flow from bottom to top
- Keyable guide rails
- Conforms to IEC 60 297-3-101,-102,-103

HeiPac VME/VME64x Systems



7 U, 12 slots
Order no. see page 248

Applications

Configuration of 19" industrial computer systems according to VME specification for

- Process Control
- Traffic Management System
- Image Processing
- Industrial Automation

Technical specifications

- 482.6 mm (19") rack-mount system for vertical mounting of double Eurocards
- 7 U, 405 mm deep
- Aluminium, clear-chromated
- Including backplane, power supply and rear fan
- Completely assembled, pre-wired and tested
- Installation space for Eurocards/double Eurocards: 12 slots
- Installation of VME- or VME64x boards according to VME specification

Benefits at a glance

- Vertical installation of double Eurocards
- EMC and ESD protection
- Completely assembled, pre-wired and tested
- Well-directed air flow from front to rear
- Keyable guide rails
- Corresponds to IEC 60 297-3-101,-102,-103

HeiPac VME/VME64x Systems



9 U, 12 slots with RiCool and Rear I/O
Order no. see page 249

Applications

Configuration of 19" industrial computer systems according to VME specification for

- Process Control
- Traffic Management System
- Image Processing
- Industrial Automation

Technical specifications

- 482.6 mm (19") rack-mount system for vertical mounting of double Eurocards
- 9 U, 290.5 mm deep, on the rear side for I/O modules
- Aluminium, clear-chromated
- Including backplane, power supply and 2 radial fans HeiCool (204 m3/h)
- Completely assembled, pre-wired and tested
- Installation space for Eurocards/double Eurocards: 12 slots
- Installation of VME- or VME64x boards according to VME specification


Benefits at a glance

- Vertical installation of double Eurocards
- EMC and ESD protection
- Completely assembled, pre-wired and tested
- Well-directed air flow from front to rear
- Rear I/O transition modules
- Keyable guide rails
- Effective ventilation by 2 radial fans HeiCool (204 m3/h)
- Conforms to IEC 60 297-3-101,-102,-103

SYSTEM PLATFORMS

RACK-MOUNT SYSTEMS FOR VME/VME64x

HeiPac 3 U, 5 slots/4 U, 7 slots horizontal

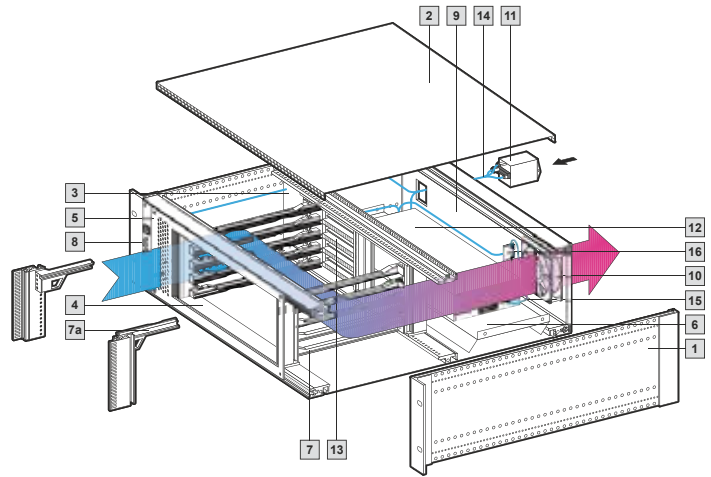

Technical specifications

Subrack, 405 mm deep, for installation in 482.6 mm (19") enclosures or cases. Prepared to accommodate VMEbus boards and drives.

Includes MPS monitoring (see pages 255 ff.)

Complies with IEC 60 297-3-101,-102, -103,

Fully assembled, pre-wired and tested.

Illustration

MPS system 3 U

| U | 3 | 3 | 4 | 4 | Page |
|--|-----------------|-----------------|-----------------|-----------------|------|
| Side panel depth mm | 405 | 405 | 405 | 405 | |
| Wiring space (depth in mm) | 210 | 210 | 210 | 210 | |
| For PCB | 6 U x 160 mm | 6 U x 160 mm | 6 U x 160 mm | 6 U x 160 mm | |
| MPS system Model no. for VME | 9910.949 | - | 9910.954 | - | |
| MPS system Model no. for VMe64x | - | 9910.950 | - | 9910.955 | |


Mechanical supply includes

| Description | Material | Qty. | | | | |
|--|--|------|----|----|----|-----|
| 1 HeiPac basic subrack system (side panels, horizontal rails, flanges, EMC gaskets) | Aluminium, clear-chromated/stainless steel | 1 | 1 | 1 | 1 | - |
| 2 Top and bottom covers, solid | Aluminium | 2 | 2 | 2 | 2 | 161 |
| 3 Air partition | Aluminium | 1 | 1 | 1 | 1 | 187 |
| 4 Horizontal mounting kit | Aluminium, clear-chromated | 1 | 1 | 1 | 1 | 151 |
| 5 Trim frame for horizontal mounting kit | 2.5 mm aluminium, clear-chromated | 1 | 1 | 1 | 1 | 151 |
| 6 Mounting base for power supply unit | 2 mm aluminium, anodised | 1 | 1 | 1 | 1 | 201 |
| EMC shielding plate for fan | Aluminium, clear-chromated | 1 | 1 | 1 | 1 | 193 |
| 7 Guide rails | Polycarbonate UL 94-V0 | 10 | - | 14 | - | 154 |
| 7a Plastic guide rails, keyable | Polycarbonate UL 94-V0 | - | 10 | - | 14 | 155 |
| 8 EMC front panel 3 U or 4 U/5 HP, with MPS monitoring | 2.5 mm aluminium, clear-chromated | 1 | 1 | 1 | 1 | - |
| 9 EMC rear panel 3 U/84 HP with fan and connector cut-out | 2.5 mm aluminium, clear-chromated | 1 | 1 | - | - | - |
| EMC rear panel 4 U/84 HP with fan and connector cut-out | 2.5 mm aluminium, clear-chromated | - | - | 1 | 1 | - |

Electrical/electronic supply includes

| Description | Technical specifications | Qty. | | | | |
|---|--|------|---|---|---|-----|
| 10 DC fan | 12 V DC, 48 m ³ /h per fan (UL, CSA, VDE) optionally speed-controlled | 1 | 1 | 1 | 1 | 191 |
| 11 IEC filtered mains inlet | 6 A (VDE, UL, CSA) | 1 | 1 | 1 | 1 | 257 |
| 12 Switch mode power supply unit | 250 W | 1 | 1 | 1 | 1 | - |
| 13 VME backplane | J1, 5 slots, IN-board, passive, ADC | 1 | - | - | - | 254 |
| VME64x backplane | J1/J2, 5 slots (without P0) | - | 1 | - | - | 252 |
| VME backplane | J1, 7 slots, IN-board, passive, ADC | - | - | 1 | - | 254 |
| VME64x backplane | J1/J2, 7 slots | - | - | - | 1 | 252 |
| LED display module for MPS monitoring | for +5 V, ±12 V, fan failure | 1 | 1 | 1 | 1 | - |
| 14 AC cable harness | - | • | • | • | • | - |
| 15 DC cable harness | - | • | • | • | • | - |
| 16 Fan module for DC fan | - | 1 | 1 | 1 | 1 | - |
| Controller module | with interface for RS-232 and CMC-TC | 1 | 1 | 1 | 1 | - |

HeiPac 4 HE/7 HE, 12 Slot

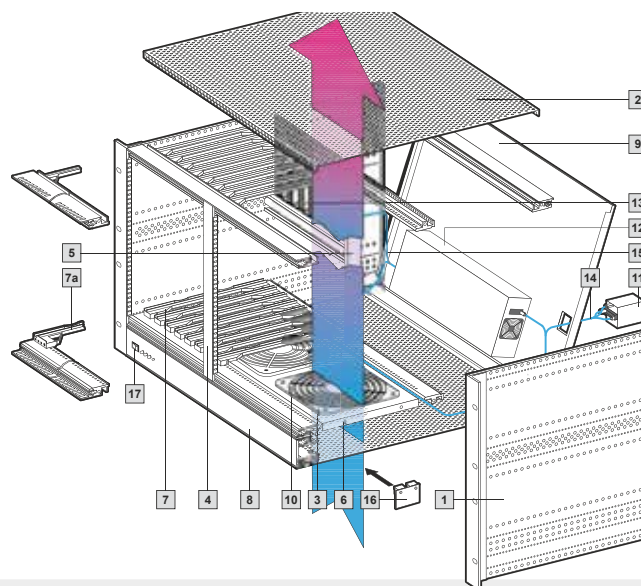

Technical specifications

Subrack, 405 mm deep, for installation in 482.6 mm (19") enclosures or cases. Prepared to accommodate VMEbus boards and drives.

Includes MPS Monitoring (see pages 255 ff.)

Complies with IEC 60 297-3-101, -102, -103,

Fully assembled, pre-wired and tested.

Illustration

MPS system 7 U

| U | 4 (3 + 1) | 7 (6 + 1) | 7 (6 + 1) | Page |
|--|-----------------|------------------|-----------------|------|
| Side panel depth mm | 405 | 405 | 405 | |
| Wiring space (depth in mm) | 210 | 210 | 210 | |
| For PCB | 3 U x 160 mm | 3 U/6 U x 160 mm | | |
| MPS system Model No. for VME | 9909.484 | 9910.956 | - | |
| MPS system Model No. for VME64x | - | - | 9910.957 | |

Mechanical supply includes

| Description | Material | Qty. | | | |
|--|--|------|----|----|-----|
| 1 HeiPac basic subrack system (side panels, horizontal rails, flanges, EMC gaskets) | Aluminium, clear-chromated/stainless steel | 1 | 1 | 1 | - |
| 2 Top and bottom covers, vented | Aluminium | 2 | 2 | 2 | 161 |
| 3 Finger guard | Polyamid | 3 | 3 | 3 | 192 |
| 4 EMC front panel, 6 U/4 HP (with 7 U) | Aluminium, clear-chromated | - | 1 | - | - |
| 5 Support, vertical (with 7 U) | Aluminium, clear-chromated | - | 1 | - | 150 |
| 6 Fan mounting plate | 1 mm aluminium, anodised | 1 | 1 | 1 | 186 |
| 7 Guide rails | Polycarbonate UL 94-V0 | 24 | 24 | - | 154 |
| 7a Plastic guide rails, keyable | Polycarbonate UL 94-V0 | - | - | 24 | 155 |
| 8 EMC front panel 1 U/84 HP for switches/LED | 2.5 mm aluminium, clear-chromated | 1 | 1 | 1 | - |
| Rear panel 4 U/84 HP, horizontally hinged with connector cut-out | 2.5 mm aluminium, clear-chromated | 1 | - | - | - |
| 9 EMC rear panel 7 U/84 HP, horizontally hinged with connector cut-out | 2.5 mm aluminium, clear-chromated | - | 1 | 1 | - |


Electrical/electronic supply includes

| Description | Technical specifications | Qty. | | | |
|---|---|------|---|---|-----|
| 10 DC fan | 12 V DC, 140 m ³ /h per fan (VDE, UL, CSA) optionally speed-controlled | 3 | 3 | 3 | 191 |
| 11 IEC filtered mains inlet | 6 A (VDE, UL, CSA) | 1 | 1 | 1 | 257 |
| 12 Switch mode power supply unit | 400 W | 1 | 1 | 1 | 196 |
| 13 VME backplane | J1, 12 slots, IN-board, passive, ADC | 1 | 1 | - | 254 |
| VME64x backplane | J1/J2, 12 slots | - | - | 1 | 252 |
| 17 LED display module for MPS monitoring | for (3.3 V), +5 V, ±12 V, fan failure | 1 | 1 | 1 | - |
| 14 AC cable harness | - | • | • | • | - |
| 15 DC cable harness | - | • | • | • | - |
| 16 Fan module for DC fan | - | 1 | 1 | 1 | - |
| Controller module | with interface for RS-232 and CMC-TC | 1 | 1 | 1 | - |

SYSTEM PLATFORMS

RACK-MOUNT SYSTEMS FOR VME/VME64x

HeiPac 7 U, 12 slots

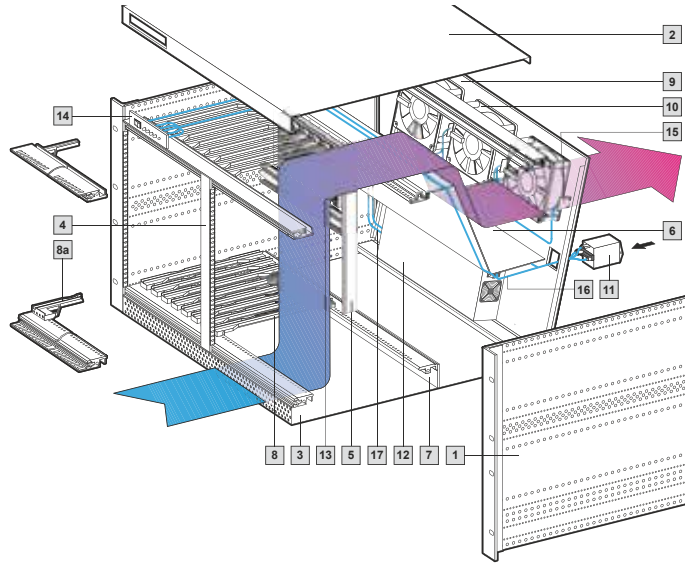

Technical specifications

Subrack, 405 mm deep, for installation in 482.6 mm (19") enclosures or cases. Prepared to accommodate VMEbus boards and drives.

Includes MPS Monitoring (see pages 255 ff.)

Complies with IEC 60 297-3-101,-102, -103,

Fully assembled, pre-wired and tested.

| U | 7 (6+ 2 x ½) | 7 (6+ 2 x ½) | Page |
|--|-----------------|-----------------|------|
| Side panel depth mm | 405 | 405 | |
| Wiring space (depth in mm) | 210 | 210 | |
| For PCB | 6 U x 160 mm | 6 U x 160 mm | |
| MPS system Model No. for VME | 9910.958 | - | |
| MPS system Model No. for VME64x | - | 9910.959 | |


Mechanical supply includes

| Description | Material | Qty. | | |
|--|--|------|----|-----|
| 1 HeiPac basic subrack system (side panels, horizontal rails, flanges, EMC gaskets) | Aluminium, clear-chromated/stainless steel | 1 | 1 | - |
| 2 Cover with ½ U edge fold and cut-outs for switches/LEDs | Aluminium | 1 | 1 | 163 |
| 3 Bottom cover with ½ U edge fold, ventilated at the front | Aluminium | 1 | 1 | 163 |
| 4 EMC front panel 6 U/4 HP | 2.5 mm aluminium, clear-chromated | 1 | - | - |
| EMC shielding plate for fan | Aluminium, clear-chromated | 3 | 3 | 193 |
| 5 Vertical support | Aluminium, clear-chromated | 1 | - | 150 |
| 6 Air baffle | 1 mm aluminium, anodised | 1 | 1 | 187 |
| 7 Air block panel, ½ U | Epoxyd | 1 | 1 | 187 |
| 8 Guide rails | Polycarbonate UL 94-V0 | 24 | - | 154 |
| 8a Plastic guide rails, keyable | Polycarbonate UL 94-V0 | - | 24 | 155 |
| 9 EMC rear panel, horizontally hinged, 7 U, with fan and connector cut-out | 2.5 mm aluminium, clear-chromated | 1 | 1 | - |

Electrical/electronic supply includes

| Description | Technical specifications | Qty. | | |
|---|--|------|---|-----|
| 10 DC fan | 12 V DC, 140 m³/h per fan, (UL, CSA, VDE) optional speed control | 3 | 3 | 191 |
| 11 IEC filtered mains inlet | 6 A (VDE, UL, CSA) | 1 | 1 | 257 |
| 12 Switch mode power supply unit | 400 W | 1 | 1 | 196 |
| 13 VME backplane | J1, 12 slots, IN-board passive, ADC | 1 | - | 254 |
| VME64x backplane | J1/J2, 12 slots (without P0) | - | 1 | 252 |
| 14 LED display module for MPS monitoring | for (3.3 V), +5 V, ±12 V, fan failure | 1 | 1 | - |
| 15 Fan module for DC fan | - | 1 | 1 | - |
| 16 AC cable harness | - | • | • | - |
| 17 DC cable harness | - | • | • | - |
| Controller module | with interface for RS-232 and CMC-TC | 1 | 1 | - |

HeiPac 9 U, 12 slots, with HeiCool radial fan

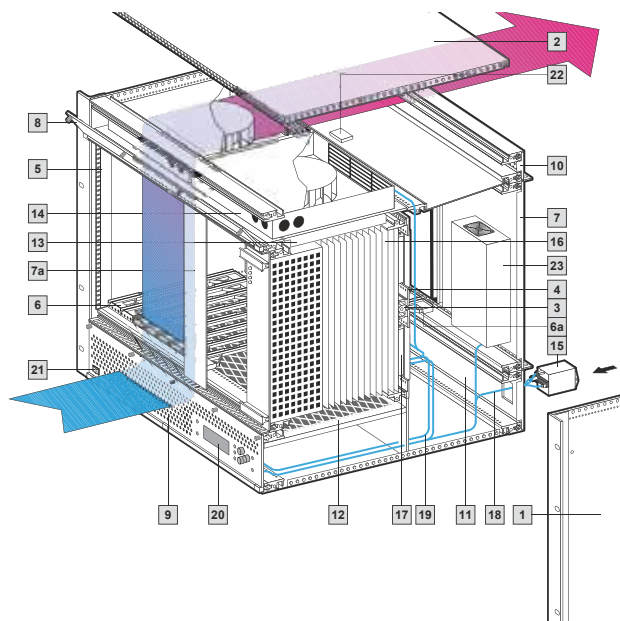

Technical specifications

Subrack, 290.5 mm deep, for installation in 482.6 mm (19") enclosures or cases. Prepared to accommodate VMEbus boards and drives.

Includes MPS Monitoring (see pages 255 ff.)

Complies with IEC 60 297-3-101, -102, -103,

Fully assembled, pre-wired and tested.

| | | |
|--|-----------------------|------|
| U | 9 (6 + 2 x 1½) | Page |
| Side panel depth mm | 290.5 | |
| Wiring space (depth in mm) | 85.5 | |
| For PCB | 6 U x 160 mm | |
| MPS system Model No. for VME64x | 9910.960 | |

Mechanical supply includes

| Description | Material | Qty. | |
|--|--|------|-----|
| 1 HeiPac basic subrack system (side panels, horizontal rails, flanges, EMC gaskets) | Aluminium, clear-chromated/stainless steel | 1 | - |
| 2 Top and bottom covers, solid | 1 mm Aluminium | 2 | 161 |
| 3 Centre horizontal rail 12 HP | 1 mm aluminium, clear-chromated | 1 | - |
| 4 Z rail 12 HP | Aluminium, clear-chromated | 4 | - |
| 5 EMC contact strip | Aluminium, clear-chromated | 2 | 146 |
| 6 Plastic guide rails, keyable | Polycarbonate UL 94-V0 | 24 | 155 |
| Guide rails, keyable, green, for power supply | Polycarbonate UL 94-V0 | 2 | 155 |
| 6a Guide rails for I/O transition modules | Polycarbonate UL 94-V0 | 24 | - |
| 7 EMC rear panel 6 U/36 HP | 2.5 mm aluminium, clear-chromated | 1 | - |
| 7a EMC front panel | 2.5 mm aluminium, clear-chromated | 1 | - |
| 8 Front panel 1½ U/84 HP, horizontally hinged | 2.5 mm aluminium, clear-chromated | 1 | - |
| 9 Front panel 1½ U/84 HP, vented, horizontally hinged, for MPS monitoring | 2.5 mm aluminium, clear-chromated | 1 | - |
| 10 EMC rear panel 1½ U/84 HP, vented | 2.5 mm aluminium, clear-chromated | 1 | - |
| 11 EMC rear panel, 11/2 U/84 HP, with connector cut-out | 2.5 mm aluminium, clear-chromated | 1 | - |
| 12 Filter mat 160 mm, 84 HP, for slide-in attachment | - | 1 | - |
| 13 Mounting plate for HeiCool | 1 mm sheet steel, zinc-plated, passivated | 1 | - |

Electrical/electronic supply includes

| Description | Technical specifications | Qty. | |
|---|------------------------------|------|-----|
| 14 HeiCool DC fan, individually removable. Including fault alarm signal, speed control | 24 V DC, 204 m³/h, 48 W | 2 | - |
| 15 IEC filtered mains inlet | 6 A (VDE, UL, CSA) | 1 | 257 |
| 16 Power supply, plug-in, 6 U/12 HP | 270 W | 1 | 197 |
| Backplane VME64x, without P0 | J1/J2, 12 slots | 1 | 252 |
| 17 Female connector for power supply unit | H15 | 2 | - |
| 18 AC cable harness | - | • | - |
| 19 DC cable harness | - | • | - |
| 20 Display module | for +5 V, ±12 V, fan failure | 1 | - |
| 21 Mains switch | - | 1 | - |
| 22 Monitoring module for HeiCool and backplane | - | 2 | - |
| 23 Power supply for HeiCool | - | 1 | - |
| Controller module | - | 1 | - |
| Temperature module | - | 1 | - |

SYSTEM PLATFORMS

VMEbus – BACKPLANES

Technical specifications

General technical specifications VMEbus

The VMEbus, based on standard IEEE 1014 and IEC 821, has become established worldwide as an industry standard. The VME64 is a new addition to the VME family to ANSI/VITA 1-1994 and supports 64-bit data traffic. The VME64x extends the VME family to ANSI/VITA 1.1-1997 and is available with the optional 133-pole 2 mm connector J0. 160-pole connectors are used with VME64x. This system remains backward compatible, so that assemblies with 96-pole connectors to IEC 60 603-2 may still be used. All HEITEC VMEbus boards are of a HIGH SPEED DESIGN. Minimal reflections are achieved, due to even surge impedance of the signal track. The consistent shielding of every signal track ensures minimum coupling and hence guarantees interference-free operation even when extended to 64 bit mode with the 2e protocol (160 Mbit/s).

Daisy-chain circuit

With the daisy-chain circuit, a distinction is made between manual daisy-chaining and automatic daisy-chaining. Automatic daisy-chaining renders the connection of jumpers superfluous, and users are saved the time-consuming task of insertion and extraction. What is more, possible misconnections are avoided. Automatic daisy-chaining can be achieved in two ways. HEITEC VME backplanes are generally supplied with automatic daisy-chaining.

Termination

In order to avoid malfunctions on signal tracks that may arise as a result of reflections on the exposed track end, these must be terminated with the VMEbus. Termination may be either ON-/IN-board (on the backplane) or OFF-board (external). With regard to the type of termination, a distinction is made between passive and active termination. The benefit of active termination lies in the lower closed-circuit current consumption. Passive termination is distinguished by superior frequency response and a broader temperature range.

Pin assignment J1 and J2

| Pin assignment for J1 connector VME64x | | | | | |
|--|-------------------------------------|---------|------------|----------|--------|
| Pin no. | Pin assignment for J1 connector VME | | | | |
| | Z | A | B | C | D |
| 1 | MPR | D00 | BBSY | D08 | VPC |
| 2 | GND | D01 | BCLR | D09 | GND |
| 3 | MCLK | D02 | ACFAIL | D10 | + V1 |
| 4 | GND | D03 | BG0IN | D11 | + V2 |
| 5 | MSD | D04 | BG0OUT | D12 | RsvU |
| 6 | GND | D05 | BG1IN | D13 | - V1 |
| 7 | MMD | D06 | BG1OUT | D14 | - V2 |
| 8 | GND | D07 | BG2IN | D15 | RsvU |
| 9 | MCTL | GND | BG2OUT | GND | GAP |
| 10 | GND | SYSCLK | BG3IN | SYSFAIL | GAO |
| 11 | RTRY1 | GND | BG3OUT | BERR | GA1 |
| 12 | GND | DS1 | BR0 | SYSRESET | +3.3 V |
| 13 | RsvBus | DS0 | BR1 | LWORD | GA2 |
| 14 | GND | WRITE | BR2 | AM5 | +3.3 V |
| 15 | RsvBus | GND | BR3 | A23 | GA3 |
| 16 | GND | DTACK | AM0 | A22 | +3.3 V |
| 17 | RsvBus | GND | AM1 | A21 | GA4 |
| 18 | GND | AS | AM2 | A20 | +3.3 V |
| 19 | RsvBus | GND | AM3 | A19 | RsvBus |
| 20 | GND | IACK | GND | A18 | +3.3 V |
| 21 | RsvBus | IACKIN | SERCLK (1) | A17 | RsvBus |
| 22 | GND | IACKOUT | SERDAT (1) | A16 | +3.3 V |
| 23 | RsvBus | AM4 | GND | A15 | RsvBus |
| 24 | GND | A07 | IRQ7 | A14 | +3.3 V |
| 25 | RsvBus | A06 | IRQ6 | A13 | RsvBus |
| 26 | GND | A05 | IRQ5 | A12 | +3.3 V |
| 27 | RsvBus | A04 | IRQ4 | A11 | LI/I |
| 28 | GND | A03 | IRQ3 | A10 | +3.3 V |
| 29 | SBB | A02 | IRQ2 | A09 | LI/O |
| 30 | GND | A01 | IRQ1 | A08 | +3.3 V |
| 31 | SBA | -12 V | +5 V STDBT | +12 V | GND |
| 32 | GND | +5 V | +5 V | +5 V | VPC |

| Pin assignment for J2 connector VME64x | | | | | |
|--|-------------------------------------|-----------|-------|-----------|----|
| Pin no. | Pin assignment for J2 connector VME | | | | |
| | Z | A | B | C | D |
| 1 | UD | User def. | +5 V | User def. | UD |
| 2 | GND | User def. | GND | User def. | UD |
| 3 | UD | User def. | Retry | User def. | UD |
| 4 | GND | User def. | A24 | User def. | UD |
| 5 | UD | User def. | A25 | User def. | UD |
| 6 | GND | User def. | A26 | User def. | UD |
| 7 | UD | User def. | A27 | User def. | UD |
| 8 | GND | User def. | A28 | User def. | UD |
| 9 | UD | User def. | A29 | User def. | UD |
| 10 | GND | User def. | A30 | User def. | UD |
| 11 | UD | User def. | A31 | User def. | UD |
| 12 | GND | User def. | GND | User def. | UD |
| 13 | UD | User def. | +5 V | User def. | UD |
| 14 | GND | User def. | D16 | User def. | UD |
| 15 | UD | User def. | D17 | User def. | UD |
| 16 | GND | User def. | D18 | User def. | UD |
| 17 | UD | User def. | D19 | User def. | UD |
| 18 | GND | User def. | D20 | User def. | UD |
| 19 | UD | User def. | D21 | User def. | UD |
| 20 | GND | User def. | D22 | User def. | UD |
| 21 | UD | User def. | D23 | User def. | UD |
| 22 | GND | User def. | GND | User def. | UD |
| 23 | UD | User def. | D24 | User def. | UD |
| 24 | GND | User def. | D25 | User def. | UD |
| 25 | UD | User def. | D26 | User def. | UD |
| 26 | GND | User def. | D27 | User def. | UD |
| 27 | UD | User def. | D28 | User def. | UD |
| 28 | GND | User def. | D29 | User def. | UD |
| 29 | UD | User def. | D30 | User def. | UD |
| 30 | GND | User def. | D31 | User def. | UD |
| 31 | UD | User def. | GND | User def. | UD |
| 32 | GND | User def. | +5 V | User def. | UD |

Technical specifications




Automatic daisy-chaining J1 and J1/J2

Via the use of connectors with integral mechanical switches, the contact is automatically opened when the daughterboard is inserted, and closed again when it is extracted.



Automatic daisy-chaining VME64x

The second option for automatic daisy-chaining is achieved here by an "or" logic integrated onto the backplane. If the daughterboard is extracted, the logic closes the daisy-chain.



Chassis GND connection

An electrically conductive chassis GND surface is attached to the subracks in the mounting section of the backplane. This facilitates EMC-sealed mounting of the backplane on the subracks. With VME64x, RF linking of the subracks and system earth is achieved via capacitors (10nF, 200 V at each slot). Static charges are discharged via a resistor ($\geq 1 \text{ M}\Omega$). A combined connection component (screw M4 and Faston 2.8 or 6.3 x 0.8 mm) is provided for connection of the enclosure earth.



Power connections

Infeed of the main operating voltage +5 V/+3.3 V and GND is provided via busbars with M6 screw terminal. The auxiliary operating voltages are supplied via double Fastons with additional M4 screw thread. Optimum supply of the daughterboards and hence problem-free operation is ensured, thanks to the arrangement of the infeed modules on the backplane.

Utility connector

The special signals to the power pack and to external LEDs are routed on a separate connector on the backplanes.

A 7-pole, a 10-pole or a 14-pole connector with 2.54 mm spacing is provided, depending on the backplane type.

Pin assignment, 10/14 Pins

| | | | |
|-----------|----|----|-------------------|
| GND | 1 | 2 | GND Sense (5 V) |
| +5 V | 3 | 4 | +5 V Sense |
| ACFAIL- | 5 | 6 | ACFAIL- |
| SYSFAIL- | 7 | 8 | SYSFAIL- |
| SYSRESET- | 9 | 10 | SYSRESET- |
| +3.3 V | 11 | 12 | +3.3 V Sense |
| GND | 13 | 14 | GND Sense (3.3 V) |

J1, J1/J2: 10 pins, VME64x: 14 pins

Geographical address pin assignments (VME64x)

| Slot no. | GAP Pin J1-D9 | GA4 Pin J1-D17 | GA3 Pin J1-D15 | GA2 Pin J1-D13 | GA1 Pin J1-D11 | GA0 Pin J1-D10 |
|----------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| 1 | Open | Open | Open | Open | Open | GND |
| 2 | Open | Open | Open | Open | GND | Open |
| 3 | GND | Open | Open | Open | GND | GND |
| 4 | Open | Open | Open | GND | Open | Open |
| 5 | GND | Open | Open | GND | Open | GND |
| 6 | GND | Open | Open | GND | GND | Open |
| 7 | Open | Open | Open | GND | GND | GND |
| 8 | Open | Open | GND | Open | Open | Open |
| 9 | GND | Open | GND | Open | Open | GND |
| 10 | GND | Open | GND | Open | GND | Open |
| 11 | Open | Open | GND | Open | GND | GND |
| 12 | GND | Open | GND | GND | Open | Open |
| 13 | Open | Open | GND | GND | Open | GND |
| 14 | Open | Open | GND | GND | GND | Open |
| 15 | GND | Open | GND | GND | GND | GND |
| 16 | Open | GND | Open | Open | Open | Open |
| 17 | GND | GND | Open | Open | Open | GND |
| 18 | GND | GND | Open | Open | GND | Open |
| 19 | Open | GND | Open | Open | GND | GND |
| 20 | GND | GND | Open | GND | Open | Open |
| 21 | Open | GND | Open | GND | Open | GND |



Pin assignments J0

| Pin no. | Z | A | B | C | D | E | F |
|---------|-----|--------------|--------------|--------------|--------------|--------------|-----|
| 1 - 19 | GND | User Defined | User Defined | User Defined | User Defined | User Defined | GND |

SYSTEM PLATFORMS

VME64x – BACKPLANES

Backplanes VME64x

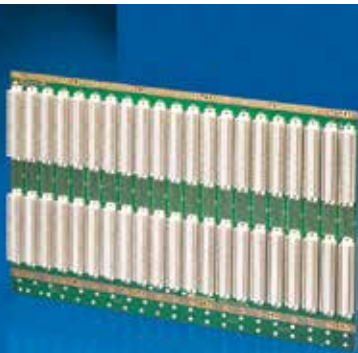

Technical specifications

| | | |
|--|---|--------|
| Number of layers | 10 | |
| Layer structure | Optimised for optimum RF performance. Outer layers designed as shielding surface. | |
| PCB thickness | 4.5 mm ± 10 % | |
| Ohmic resistance of the signal tracks | < 1 Ohm | |
| Surge impedance Z of the signal tracks | 55 Ohm | |
| Basic power consumption, terminated at both ends | Active: < 200 mA Passive: < 2 A | |
| Power supply: - Busbar with M6 screw terminal - M4 screw terminal and FASTON 6.3 x 0.8 mm - < 5 slots | +5 V, +3.3 V and 0 V ±12 V, +5 V STBY, ±V1, ±V2 and case FASTON 6.3 x 0.8 mm | |
| Current carrying capacity of busbar | max. 200 A | |
| Current carrying capacity of a combined double flat-pin connector/screw terminal | 25 A | |
| Current carrying capacity of a FASTON flat connector | 10 A | |
| Current carrying capacity of the assembly, per slot | +3.3 V | 12.5 A |
| | +5 V | 9.0 A |
| | +12 V | 1.5 A |
| | -12 V | 1.5 A |
| | +5 V STDBY | 1.5 A |
| | +48 V (38 - 75 V) | 3.0 A |
| Termination ON-/IN-board | 6 U: active, 6.5 U: active (passive/changeover) | |
| Installation height | 6 U/6.5 U | |
| Distance between slots | 4 HP | |
| Connectors | Press-fit technique quality class 2, 400 connection cycles 160 pins compatible with C96 P0 spacing 2 mm, 95/133 pins | |
| Operating temperature range | Active termination 0° ... +70°C Passive termination -40° ... +85°C | |
| Relative humidity | 90%, non-condensing | |

VME64x 6 U

| Slot | Dimensions | | Model No. | |
|------|------------|----------|----------------------|-------------------|
| | Height mm | Width mm | without P0 connector | with P0 connector |
| 2 | 261.7 | 39.5 | 9912.423 | 9912.410 |
| 3 | 261.7 | 59.5 | 9912.424 | 9912.411 |
| 4 | 261.7 | 80 | 9912.425 | 9912.362 |
| 5 | 261.7 | 100 | 3687.608 | 3687.609 |
| 6 | 261.7 | 120.5 | 9912.426 | 9912.412 |
| 7 | 261.7 | 141 | 3687.610 | 3687.611 |
| 8 | 261.7 | 161.5 | 9912.427 | 9912.413 |
| 9 | 261.7 | 181.5 | 9904.930 | 9904.932 |
| 10 | 261.7 | 202 | 9904.931 | 9904.933 |
| 11 | 261.7 | 222.5 | 9912.428 | 9912.414 |

| Slot | Dimensions | | Model No. | |
|------|------------|----------|----------------------|-------------------|
| | Height mm | Width mm | without P0 connector | with P0 connector |
| 12 | 261.7 | 242.5 | 3686.634 | 3686.473 |
| 13 | 261.7 | 263 | 9912.429 | 9912.415 |
| 14 | 261.7 | 283 | 9912.430 | 9912.416 |
| 15 | 261.7 | 303.5 | 9912.431 | 9912.417 |
| 16 | 261.7 | 324 | 9912.432 | 9912.418 |
| 17 | 261.7 | 344 | 9912.433 | 9912.419 |
| 18 | 261.7 | 364.5 | 9912.434 | 9912.420 |
| 19 | 261.7 | 385 | 9912.435 | 9912.421 |
| 20 | 261.7 | 405 | 9912.436 | 9912.422 |
| 21 | 261.7 | 425.5 | 3686.635 | 3686.474 |

VME64x 6.5 U

| Slot | Dimensions | | Model No. | |
|------|------------|----------|----------------------|-------------------|
| | Height mm | Width mm | without P0 connector | with P0 connector |
| 5 | 283.7 | 100 | 9910.012 | 9910.007 |
| 7 | 283.7 | 141 | 9910.013 | 9910.008 |
| 9 | 283.7 | 181.5 | 9910.014 | 9910.009 |
| 10 | 283.7 | 202 | 9904.928 | 9904.929 |
| 12 | 283.7 | 242.5 | 9910.015 | 9910.010 |
| 21 | 283.7 | 425.5 | 9910.016 | 9910.011 |

Material

Fibreglass epoxy to IEC 60 249 (type FR4)

Supply includes

Backplane, fully populated.

+ Accessories

For backplane mounting:
Conductive strips, see page 145
Insulating strips, see page 145

Backplanes VME J1/J2 Monolithic



Technical specifications

| | |
|--|---|
| Number of layers | 6 |
| Layer structure | Optimised for optimum RF performance. Outer layers designed as shielding surface. |
| PCB thickness | 3.2 mm ± 10 % |
| Ohmic resistance of the signal tracks | < 1 Ohm |
| Surge impedance Z of the signal tracks | 60 Ohm |
| Basic power consumption, terminated at both ends | Active: < 200 mA Passive: < 1.5 A |
| Power supply: - Busbar with screw terminal M6 - Screw terminal M4 and FASTON 6.3 x 0.8 mm - < 5 slots | +5 V, and 0 V ±12 V, +5 V STBY and case FASTON 6.3 x 0.8 mm |
| Current carrying capacity of busbar | max. 200 A |
| Current carrying capacity of a combined double flat-pin connector/screw terminal | 25 A |
| Current carrying capacity of a FASTON flat connector | 10 A |
| Current carrying capacity of the assembly, per slot | +5 V 9.0 A +12 V 1.5 A -12 V 1.5 A +5 V STDBY 1.5 A |
| Termination ON-/IN-board | active (may be switched to passive) |
| Installation height | 6 U |
| Distance between slots | 4 HP |
| Connectors | Press-fit technique quality class 2, 400 connection cycles C96 |
| Operating temperature range | Active termination 0° ... +70°C Passive termination -40° ... +85°C |
| Relative humidity | 90%, non-condensing |

| Slot | Dimensions | | Model No. |
|------|------------|----------|-----------------|
| | Height mm | Width mm | |
| 2 | 261.7 | 39.5 | 3686.495 |
| 3 | 261.7 | 59.5 | 3686.496 |
| 4 | 261.7 | 80 | 3686.497 |
| 5 | 261.7 | 100 | 3686.498 |
| 6 | 261.7 | 120.5 | 3686.499 |
| 7 | 261.7 | 141 | 3686.500 |
| 8 | 261.7 | 161.5 | 3686.501 |
| 9 | 261.7 | 181.5 | 3686.502 |
| 10 | 261.7 | 202 | 3686.503 |
| 11 | 261.7 | 222.5 | 3686.504 |
| 12 | 261.7 | 242.5 | 3686.505 |
| 13 | 261.7 | 263 | 3686.506 |
| 14 | 261.7 | 283 | 3686.507 |
| 15 | 261.7 | 303.5 | 3686.508 |
| 16 | 261.7 | 324 | 3686.509 |
| 17 | 261.7 | 344 | 3686.510 |
| 18 | 261.7 | 364.5 | 3686.511 |
| 19 | 261.7 | 385 | 3686.512 |
| 20 | 261.7 | 405 | 3686.513 |
| 21 | 261.7 | 425.5 | 3686.514 |

Material

Fibreglass epoxy to IEC 60 249 (type FR4)

Supply includes

Backplane, fully populated.

+ Accessories

For backplane mounting:
Conductive strips, see page 145
Insulating strips, see page 145

SYSTEM PLATFORMS

VME – BACKPLANES

VME J1 system bus



| Technical specifications | | | |
|--|---|-------|--|
| | VME J1 | | VME J2 |
| Number of layers | 6 | | 2 |
| Layer structure | Optimised for optimum RF performance, outer layers designed as shielding surface. | | |
| PCB thickness | 3.2 mm ± 10 % | | 3.2 mm ± 10% |
| Ohmic resistance of the signal tracks | < 1 Ohm | | < 1 Ohm |
| Wellenwiderstand Z der Signalleitungen | 60 Ohm | | 60 Ohm |
| Surge impedance Z of the signal tracks | Active: < 150 mA Passive: < 1.2 A | | Passive: < 0.6 A |
| Power supply: - M4 screw terminal and FASTON 6.3 x 0.8 mm - < 5 slots | +5 V, 0 V, ±12 V, ±5 V STBY and case FASTON 6.3 x 0.8 mm | | x FASTON 6.3 x 0.8 mm |
| Current carrying capacity of a combined double flat-pin connector/screw terminal | 25 A | | 25 A |
| Current carrying capacity of a FASTON flat connector | 10 A | | 10 A |
| Current carrying capacity of the assembly, per slot | +5 V | 4.5 A | +5 V |
| | +12 V | 1.5 A | 4.5 A |
| | -12 V | 1.5 A | |
| | +5 V STDBY | 1.5 A | |
| Termination ON-/IN-board | active/passive (changeover) | | active/passive (changeover) |
| Installation height | 3 U | | 3 U |
| Distance between slots | 4 HP | | 4 HP |
| Connectors | Press-fit technique quality class 2, 400 connection cycles C96 | | Press-fit technique quality class 2, 400 connection cycles C96 |
| Operating temperature range | Active termination 0° . . . +70°C Passive termination -40° . . . +85°C | | Passive termination -40° . . . +85°C |
| Relative humidity | 90 %, non-condensing | | 90 %, non-condensing |

| Slot | Dimensions | | Model No. |
|------|------------|----------|-----------------|
| | Height mm | Width mm | |
| 3 | 128.4 | 59.5 | 3686.555 |
| 4 | 128.4 | 80 | 3686.556 |
| 5 | 128.4 | 100 | 3686.557 |
| 6 | 128.4 | 120.5 | 3686.558 |
| 7 | 128.4 | 141 | 3686.559 |
| 8 | 128.4 | 161.5 | 3686.560 |
| 9 | 128.4 | 181.5 | 3686.561 |
| 10 | 128.4 | 202 | 3686.562 |

| Slot | Dimensions | | Model No. |
|------|------------|----------|-----------------|
| | Height mm | Width mm | |
| 12 | 128.4 | 242.5 | 3686.563 |
| 13 | 128.4 | 263 | 3686.564 |
| 14 | 128.4 | 283 | 3686.565 |
| 15 | 128.4 | 303.5 | 3686.566 |
| 18 | 128.4 | 364.5 | 3686.567 |
| 20 | 128.4 | 405 | 3686.568 |
| 21 | 128.4 | 425.5 | 3686.569 |

Material

Fibreglass epoxy to IEC 60 249 (type FR4)

Supply includes

Backplane, fully populated.

+ Accessories

For backplane mounting:
Conductive strips, see page 145
Insulating strips, see page 145

VME J2 expansion bus



| Slot | Dimensions | | Model No. |
|------|------------|----------|-----------------|
| | Height mm | Width mm | |
| 3 | 128.4 | 59.5 | 3686.585 |
| 4 | 128.4 | 80 | 3686.586 |
| 5 | 128.4 | 100 | 3686.587 |
| 6 | 128.4 | 120.5 | 3686.588 |
| 7 | 128.4 | 141 | 3686.589 |
| 8 | 128.4 | 161.5 | 3686.590 |
| 9 | 128.4 | 181.5 | 3686.591 |
| 10 | 128.4 | 202 | 3686.592 |

| Slot | Dimensions | | Model No. |
|------|------------|----------|-----------------|
| | Height mm | Width mm | |
| 12 | 128.4 | 242.5 | 3686.593 |
| 13 | 128.4 | 263 | 3686.594 |
| 14 | 128.4 | 283 | 3686.595 |
| 15 | 128.4 | 303.5 | 3686.596 |
| 18 | 128.4 | 364.5 | 3686.597 |
| 20 | 128.4 | 405 | 3686.598 |
| 21 | 128.4 | 425.5 | 3686.599 |

Material

Fibreglass epoxy to IEC 60 249 (type FR4)

Supply includes

Backplane, fully populated.

+ Accessories

For backplane mounting:
Conductive strips, see page 145
Insulating strips, see page 145

MPS Monitoring electronics



In order to ensure maximum system availability and performance in industrial computers, all hardware components must offer functional reliability. The monitoring electronics for microcomputer packaging systems (MPS) offers a highly flexible, scalable security concept for key parameters such as temperature, voltage and fan speed. At the heart of this concept are intelligent function modules such as controller, temperature, fan and LCD display or LED display modules. The system may be polled, or parameters set via the Internet using remote control functions, thanks to compatibility with the HEITEC CMC-TC monitoring system. Alternatively, this may be executed directly on the MPS system, via a PC, or with the aid of CMC-TC, directly from a control point.

Benefits at a glance:

- Monitoring of temperature, voltage, fan speed and fan alarm
- Flexible, scalable system concept
- Intelligent function modules
- Adjustable temperature limits
- Remote control via the Internet in conjunction with the HEITEC CMC-TC enclosure monitoring system
- Choice of parameter levels
- Internal communications via I²C bus

Controller-Module (CMC & RS232)



Monitoring of system voltage, PSU-status, HeiCool alarm and data transfer of the temperature- and/or fan module via the RS 232 (to PC) or RS422-interface (to CMC-TC).

| Packs of | Order No. |
|----------|-----------------|
| 1 | 9909.193 |

Supply includes

Unit consisting of:
Controller-module, front plate 3 U, 4 HP

Controller-Module (CMC & LAN)



Monitoring of system voltage, PSU-status, HeiCool alarm and data transfer of the temperature- and/or fan module via LAN- (to PC) or RS422- interface (to CMC-TC).

| Packs of | Order No. |
|----------|-----------------|
| 1 | 9913.260 |

Supply includes

Unit consisting of:
Controller-Module, front plate 3 U, 4 HP

SYSTEM PLATFORMS

CPCI/VMEbus – MPS MONITORING

Display- and Controller-Module (CMC & RS232)



Controller-Module:
Monitoring of system voltage, PSU-status, HeiCool alarm and data transfer of the temperature- and/or fan module via RS232- (to PC) or RS422- interface (to CMC-TC).

- Display-Module:**
- Handling via 3 keys: forward, escape, return
 - 3 LEDs: Fan, Temperature, Volt for optical display as sum alarm
 - For displaying temperature, power supply, fan speed
 - Brightness and lightning optionally adjustable with turn on/off function
 - Temperature display in °F/°C
 - LCD (2 x 20 digits) for displaying data details

| Packs of | Order No. |
|----------|-----------|
| 1 | 9912.483 |

Supply includes

Unit consisting of:
Controller-module, display-Moduel,
Front panel 6 U, 8 HP

LED Display- and Controller Module (CMC & RS232)



Controller-Module:
Monitoring of system voltage, PSU-status, HeiCool alarm and data transfer of the temperature-s and/or fan module via RS232- (to PC) or RS422- interface (to CMC-TC).

- LED Display-Module:**
- + 3.3 V
 - + 5.0 V
 - + 12 V
 - – 12 V
 - 2 x alarm (fan, temperature)
 - Display of system voltage as to critical values
 - Red: voltage deficiency
 - Yellow (1 flash): below limit
 - Yellow (2 flashes): over limit
 - Green: voltage ok

| Packs of | Order No. |
|----------|-----------|
| 1 | 9913.748 |

Supply includes

Unit consisting of:
Controller-module, display-Moduel,
Front panel 6 U, 4 HP

Temperature-Module



- Up to 2 modules cascable
- Data transfer of each temperature sensor to the controller-module
- Up to 4 temperature sensors
- Internal communication via I²C

Note

Only applicable in connection with Controller-/LCD- or LED-modules

| Packs of | Order No. |
|----------|-----------|
| 1 | 9909.230 |

Supply includes

Unit consisting of:
Temperature-module, front panel 3 U, 4 HP

LED Display-Module



LED Display-Module:

- + 3.3 V
- + 5.0 V
- + 12 V
- – 12 V
- 2 x alarm (fan, temperature)
- Display of system voltage as to critical values
 - Red: voltage deficiency
 - Yellow (1 flash): below limit
 - Yellow (2 flashes): over limit
 - Green: voltage ok

| Packs of | Order No. |
|----------|-----------------|
| 1 | 9912.294 |

Note

Only applicable in connection with Controller-/Display- or LED-modules

Supply includes

Unit consisting of:
LED-module, front panel 3 U, 4 HP

Fan-Module



Monitoring fan functions

(Attention: requires fan with alarm signal)

| Packs of | Order No. |
|----------|-----------------|
| 1 | 9912.293 |

Note

Only applicable in connection with Controller-/Display- or LED-modules

Supply includes

Unit consisting of:
Fan-module, front panel 3 U, 4 HP

Mains switch



LED Display-module:

- Rocker switch 6 A/250 V, 2-pole, FASTON connections, (4.7 x 0.8 mm)
- VDE, UL, CSA, TÜV, SEMKO, DEMCO, SEV, NEMKO, SETI, BEAB approvals
- Insulation resistance: > 10 MΩ
- Test voltage: 1 kV
- Front panel: 21 x 15 mm
- Cut-out: 19.2 x 12.9 mm
- Installation depth: 17 mm

| Max. current | Packs of | Order No. |
|--------------|----------|-----------------|
| 6 A | 1 St. | 3687.711 |

Filtered IEC mains inlet




For mains input

Combination module consisting of an IEC socket to IEC 60 320 and IEC 60 950 with line filter and 5 x 20 mm G fuse holder.

Technical specifications

Metal enclosure for screw mounting
Mains input: via IEC socket
Mains output: via 3 FASTON contacts (L, N, PE, 6.3 x 0.8)
Variants available with or without switch
Temperature range: –25°C to +85°C



| | Order No. | |
|--------------------|--------------------------|-----------------|
| | with switch | without switch |
| | 3687.709 | 3687.710 |
| Mains voltage max. | 250 V AC | 250 V AC |
| Leakage current | 2 x 0.32 mA | ∅ 500 µA |
| Max. current | 6 A | 6 A |
| Mounting holes | 40 mm | 36 mm |
| Installation depth | 90 mm | 56 mm |
| Cut-out | 60 x 29 mm | 33.9 x 29 mm |
| Approvals | VDE, SEMKO, SEV, UL, CSA | VDE |

LIST OF ORDER NUMBERS

| Order No. | Page | Order No. | Page | Order No. | Page | Order No. | Page | Order No. | Page |
|-----------|---------|-----------|----------|-----------|----------|-----------|------|-----------|---------|
| 2089.000 | 203 | 3634.740 | 88, 127 | 3654.360 | 202 | 3684.043 | 31 | 3684.162 | 33 |
| 2092.200 | 203 | 3634.745 | 88, 130 | 3654.370 | 202 | 3684.044 | 31 | 3684.163 | 33 |
| 2094.200 | 203 | 3634.750 | 88, 130 | 3658.160 | 202 | 3684.045 | 31 | 3684.164 | 33 |
| 3606.140 | 158 | 3634.770 | 152 | 3658.190 | 202 | 3684.046 | 31 | 3684.165 | 33 |
| 3606.200 | 158 | 3634.780 | 153 | 3658.210 | 202 | 3684.047 | 31 | 3684.166 | 33 |
| 3606.300 | 177 | 3636.010 | 57 | 3659.000 | 208 | 3684.048 | 31 | 3684.169 | 33 |
| 3606.321 | 183 | 3652.000 | 174 | 3659.010 | 215 | 3684.049 | 31 | 3684.170 | 33 |
| 3606.330 | 178 | 3652.010 | 174 | 3659.020 | 215 | 3684.050 | 31 | 3684.171 | 33 |
| 3606.550 | 202 | 3652.020 | 174 | 3659.030 | 214 | 3684.051 | 31 | 3684.172 | 33 |
| 3606.560 | 202 | 3652.030 | 174 | 3659.050 | 208, 214 | 3684.052 | 31 | 3684.173 | 33 |
| 3606.610 | 202 | 3652.040 | 174 | 3659.060 | 208, 215 | 3684.053 | 31 | 3684.174 | 33 |
| 3634.060 | 180 | 3652.050 | 174 | 3659.090 | 208, 209 | 3684.054 | 31 | 3684.175 | 33 |
| 3634.070 | 180 | 3652.060 | 174 | 3659.100 | 210 | 3684.055 | 31 | 3684.176 | 33 |
| 3634.085 | 87 | 3652.070 | 174 | 3659.110 | 214 | 3684.056 | 31 | 3684.177 | 33 |
| 3634.100 | 83 | 3652.080 | 174 | 3659.120 | 210, 211 | 3684.057 | 31 | 3684.178 | 33 |
| 3634.110 | 83 | 3652.200 | 174 | 3659.180 | 214 | 3684.058 | 31 | 3684.179 | 33 |
| 3634.120 | 83 | 3652.210 | 174 | 3659.190 | 214 | 3684.059 | 31 | 3684.180 | 34, 83 |
| 3634.130 | 83 | 3652.220 | 174 | 3659.230 | 210, 215 | 3684.060 | 31 | 3684.181 | 34 |
| 3634.140 | 83 | 3652.230 | 174 | 3659.240 | 215 | 3684.061 | 31 | 3684.187 | 34 |
| 3634.150 | 83 | 3652.240 | 174 | 3659.250 | 211, 216 | 3684.062 | 32 | 3684.188 | 34 |
| 3634.160 | 83 | 3652.250 | 174 | 3659.270 | 216 | 3684.063 | 32 | 3684.189 | 34 |
| 3634.170 | 83 | 3652.260 | 174 | 3659.280 | 216 | 3684.064 | 32 | 3684.190 | 34, 83 |
| 3634.180 | 83 | 3652.270 | 174 | 3659.290 | 211, 216 | 3684.065 | 32 | 3684.191 | 34 |
| 3634.190 | 83 | 3652.500 | 110, 180 | 3659.320 | 211, 217 | 3684.072 | 97 | 3684.192 | 34 |
| 3634.200 | 83 | 3652.510 | 110, 180 | 3659.330 | 211, 217 | 3684.073 | 97 | 3684.193 | 34 |
| 3634.210 | 83 | 3652.520 | 110, 180 | 3659.340 | 211 | 3684.074 | 97 | 3684.194 | 34 |
| 3634.220 | 83 | 3652.530 | 110, 180 | 3659.350 | 211, 217 | 3684.075 | 97 | 3684.195 | 34 |
| 3634.230 | 83 | 3652.600 | 110, 180 | 3659.400 | 211 | 3684.076 | 97 | 3684.196 | 34 |
| 3634.240 | 83 | 3652.610 | 110, 180 | 3659.410 | 214 | 3684.077 | 97 | 3684.197 | 34 |
| 3634.250 | 83 | 3652.620 | 110, 180 | 3659.540 | 215 | 3684.078 | 97 | 3684.198 | 34 |
| 3634.420 | 89, 164 | 3652.630 | 110, 180 | 3659.700 | 212 | 3684.109 | 203 | 3684.204 | 159 |
| 3634.430 | 202 | 3653.010 | 182 | 3659.710 | 213 | 3684.128 | 33 | 3684.205 | 159 |
| 3634.435 | 202 | 3653.020 | 182 | 3659.900 | 209 | 3684.129 | 33 | 3684.206 | 151 |
| 3634.450 | 89, 164 | 3653.030 | 182 | 3666.006 | 222 | 3684.130 | 33 | 3684.207 | 151 |
| 3634.510 | 86, 143 | 3653.040 | 182 | 3666.007 | 222 | 3684.131 | 33 | 3684.208 | 151 |
| 3634.600 | 86, 142 | 3653.050 | 182 | 3666.008 | 225 | 3684.132 | 33 | 3684.209 | 151 |
| 3634.615 | 87, 142 | 3653.060 | 182 | 3666.010 | 57 | 3684.133 | 33 | 3684.210 | 83, 151 |
| 3634.620 | 86, 143 | 3653.070 | 182 | 3684.019 | 202 | 3684.134 | 34 | 3684.211 | 151 |
| 3634.625 | 89, 164 | 3653.100 | 182 | 3684.020 | 31 | 3684.135 | 34 | 3684.212 | 151 |
| 3634.630 | 89, 164 | 3653.110 | 182 | 3684.021 | 31 | 3684.136 | 34 | 3684.213 | 151 |
| 3634.635 | 89, 164 | 3653.120 | 182 | 3684.022 | 31 | 3684.137 | 34 | 3684.220 | 83, 150 |
| 3634.640 | 89, 164 | 3653.130 | 182 | 3684.023 | 31 | 3684.138 | 34 | 3684.221 | 150 |
| 3634.645 | 89, 164 | 3653.140 | 182 | 3684.024 | 31 | 3684.139 | 34 | 3684.222 | 150 |
| 3634.650 | 89, 164 | 3653.150 | 182 | 3684.025 | 31 | 3684.142 | 33 | 3684.223 | 150 |
| 3634.655 | 89, 164 | 3653.200 | 182 | 3684.026 | 31 | 3684.143 | 33 | 3684.224 | 150 |
| 3634.660 | 89, 164 | 3653.210 | 182 | 3684.027 | 31 | 3684.144 | 33 | 3684.225 | 150 |
| 3634.665 | 90, 164 | 3653.220 | 182 | 3684.028 | 32 | 3684.145 | 33 | 3684.226 | 150 |
| 3634.670 | 89, 164 | 3653.230 | 182 | 3684.029 | 32 | 3684.146 | 33 | 3684.227 | 150 |
| 3634.675 | 89, 164 | 3653.240 | 182 | 3684.030 | 32 | 3684.147 | 33 | 3684.228 | 150 |
| 3634.680 | 89, 164 | 3653.250 | 182 | 3684.031 | 32 | 3684.148 | 34 | 3684.229 | 150 |
| 3634.685 | 89, 164 | 3653.300 | 182 | 3684.032 | 32 | 3684.149 | 34 | 3684.233 | 202 |
| 3634.690 | 89, 164 | 3653.310 | 182 | 3684.033 | 32 | 3684.150 | 34 | 3684.234 | 148 |
| 3634.695 | 88, 127 | 3653.320 | 182 | 3684.034 | 31 | 3684.151 | 34 | 3684.236 | 146 |
| 3634.700 | 88, 127 | 3653.330 | 182 | 3684.035 | 31 | 3684.152 | 34 | 3684.237 | 146 |
| 3634.705 | 88, 127 | 3653.340 | 182 | 3684.036 | 31 | 3684.153 | 34 | 3684.238 | 146 |
| 3634.710 | 88, 127 | 3653.350 | 182 | 3684.037 | 32 | 3684.156 | 33 | 3684.239 | 146 |
| 3634.715 | 88, 127 | 3654.300 | 202 | 3684.038 | 32 | 3684.157 | 33 | 3684.240 | 146 |
| 3634.720 | 88, 127 | 3654.320 | 202 | 3684.039 | 32 | 3684.158 | 33 | 3684.241 | 146 |
| 3634.725 | 88, 127 | 3654.330 | 202 | 3684.040 | 32 | 3684.159 | 33 | 3684.242 | 146 |
| 3634.730 | 88, 127 | 3654.340 | 202 | 3684.041 | 32 | 3684.160 | 33 | 3684.243 | 146 |
| 3634.735 | 88, 127 | 3654.350 | 202 | 3684.042 | 32 | 3684.161 | 33 | 3684.244 | 146 |

LIST OF ORDER NUMBERS

| Order No. | Page | Order No. | Page | Order No. | Page | Order No. | Page | Order No. | Page |
|-----------|----------|-----------|------|-----------|---------|-----------|---------|-----------|---------|
| 3684.245 | 147 | 3684.321 | 187 | 3684.384 | 166 | 3684.541 | 48, 126 | 3684.620 | 49, 128 |
| 3684.246 | 147 | 3684.322 | 187 | 3684.385 | 166 | 3684.542 | 48, 126 | 3684.621 | 49, 128 |
| 3684.247 | 179 | 3684.323 | 201 | 3684.386 | 166 | 3684.543 | 48, 126 | 3684.622 | 49, 128 |
| 3684.248 | 179 | 3684.324 | 201 | 3684.387 | 166 | 3684.544 | 48, 126 | 3684.623 | 49, 128 |
| 3684.249 | 179 | 3684.325 | 159 | 3684.388 | 166 | 3684.545 | 48, 126 | 3684.624 | 49, 128 |
| 3684.250 | 83, 179 | 3684.326 | 159 | 3684.389 | 166 | 3684.546 | 48, 126 | 3684.625 | 49, 128 |
| 3684.251 | 179 | 3684.328 | 169 | 3684.410 | 171 | 3684.547 | 48, 126 | 3684.626 | 49, 128 |
| 3684.252 | 179 | 3684.330 | 165 | 3684.411 | 172 | 3684.548 | 48, 126 | 3684.627 | 49, 128 |
| 3684.253 | 179 | 3684.331 | 165 | 3684.413 | 166 | 3684.549 | 48, 126 | 3684.628 | 49, 128 |
| 3684.254 | 179 | 3684.332 | 165 | 3684.414 | 166 | 3684.550 | 48, 126 | 3684.629 | 49, 128 |
| 3684.255 | 179 | 3684.333 | 165 | 3684.415 | 166 | 3684.551 | 48, 126 | 3684.630 | 49, 128 |
| 3684.256 | 179 | 3684.334 | 165 | 3684.416 | 166 | 3684.552 | 48, 126 | 3684.631 | 49, 128 |
| 3684.257 | 179 | 3684.335 | 165 | 3684.417 | 166 | 3684.553 | 48, 126 | 3684.632 | 49, 128 |
| 3684.258 | 179 | 3684.336 | 165 | 3684.418 | 166 | 3684.554 | 48, 126 | 3684.633 | 57 |
| 3684.259 | 179 | 3684.337 | 165 | 3684.419 | 166 | 3684.560 | 132 | 3684.634 | 57 |
| 3684.260 | 179 | 3684.338 | 165 | 3684.420 | 166 | 3684.561 | 132 | 3684.635 | 57 |
| 3684.261 | 179 | 3684.339 | 165 | 3684.421 | 166 | 3684.562 | 132 | 3684.636 | 57 |
| 3684.262 | 179 | 3684.340 | 165 | 3684.422 | 166 | 3684.565 | 133 | 3684.637 | 57 |
| 3684.263 | 179 | 3684.341 | 165 | 3684.423 | 166 | 3684.566 | 133 | 3684.638 | 57 |
| 3684.264 | 179 | 3684.342 | 165 | 3684.424 | 166 | 3684.567 | 133 | 3684.639 | 57 |
| 3684.265 | 179 | 3684.343 | 165 | 3684.425 | 166 | 3684.570 | 41, 135 | 3684.640 | 57 |
| 3684.266 | 179 | 3684.344 | 166 | 3684.426 | 166 | 3684.571 | 41, 135 | 3684.643 | 55, 146 |
| 3684.267 | 179 | 3684.345 | 166 | 3684.427 | 166 | 3684.572 | 41, 135 | 3684.644 | 55, 146 |
| 3684.268 | 179 | 3684.346 | 166 | 3684.428 | 166 | 3684.579 | 44, 138 | 3684.645 | 55, 146 |
| 3684.269 | 179 | 3684.347 | 166 | 3684.429 | 166 | 3684.580 | 138 | 3684.654 | 154 |
| 3684.272 | 179 | 3684.348 | 166 | 3684.430 | 166 | 3684.581 | 44, 138 | 3684.655 | 154 |
| 3684.273 | 179 | 3684.349 | 166 | 3684.431 | 166 | 3684.582 | 44, 138 | 3684.656 | 154 |
| 3684.274 | 179 | 3684.350 | 166 | 3684.432 | 166 | 3684.584 | 46, 140 | 3684.657 | 154 |
| 3684.275 | 179 | 3684.351 | 166 | 3684.433 | 166 | 3684.587 | 46, 140 | 3684.658 | 154 |
| 3684.276 | 179 | 3684.352 | 166 | 3684.435 | 202 | 3684.588 | 46, 140 | 3684.659 | 154 |
| 3684.277 | 179 | 3684.353 | 166 | 3684.482 | 202 | 3684.589 | 46, 140 | 3684.660 | 154 |
| 3684.278 | 179 | 3684.354 | 166 | 3684.511 | 48, 126 | 3684.590 | 140 | 3684.661 | 154 |
| 3684.279 | 179 | 3684.355 | 166 | 3684.512 | 48, 126 | 3684.591 | 140 | 3684.662 | 154 |
| 3684.280 | 179 | 3684.356 | 166 | 3684.513 | 48, 126 | 3684.592 | 34, 132 | 3684.663 | 154 |
| 3684.281 | 187 | 3684.357 | 166 | 3684.514 | 48, 126 | 3684.593 | 34, 132 | 3684.664 | 154 |
| 3684.282 | 187 | 3684.358 | 165 | 3684.515 | 48, 126 | 3684.594 | 34, 132 | 3684.665 | 154 |
| 3684.283 | 187 | 3684.359 | 165 | 3684.516 | 48, 126 | 3684.595 | 34, 132 | 3684.666 | 154 |
| 3684.284 | 188 | 3684.360 | 165 | 3684.517 | 48, 126 | 3684.596 | 34, 132 | 3684.668 | 155 |
| 3684.285 | 188 | 3684.361 | 165 | 3684.518 | 48, 126 | 3684.596 | 34, 132 | 3684.669 | 155 |
| 3684.286 | 188 | 3684.362 | 165 | 3684.519 | 48, 126 | 3684.597 | 144 | 3684.670 | 157 |
| 3684.287 | 188 | 3684.363 | 165 | 3684.520 | 48, 126 | 3684.598 | 144 | 3684.672 | 157 |
| 3684.291 | 180 | 3684.364 | 165 | 3684.521 | 48, 126 | 3684.599 | 144 | 3684.673 | 157 |
| 3684.292 | 180 | 3684.365 | 165 | 3684.522 | 48, 126 | 3684.600 | 144 | 3684.674 | 157 |
| 3684.293 | 180 | 3684.366 | 165 | 3684.523 | 48, 126 | 3684.601 | 144 | 3684.675 | 157 |
| 3684.294 | 180 | 3684.367 | 165 | 3684.524 | 48, 126 | 3684.602 | 144 | 3684.676 | 157 |
| 3684.295 | 180 | 3684.368 | 165 | 3684.525 | 48, 126 | 3684.603 | 144 | 3684.677 | 157 |
| 3684.298 | 110, 180 | 3684.369 | 165 | 3684.526 | 48, 126 | 3684.604 | 144 | 3684.678 | 150 |
| 3684.299 | 110, 180 | 3684.370 | 165 | 3684.527 | 48, 126 | 3684.605 | 144 | 3684.679 | 150 |
| 3684.300 | 110, 180 | 3684.371 | 165 | 3684.528 | 48, 126 | 3684.606 | 144 | 3684.680 | 161 |
| 3684.301 | 110, 180 | 3684.372 | 165 | 3684.529 | 48, 126 | 3684.607 | 144 | 3684.681 | 161 |
| 3684.302 | 180 | 3684.373 | 165 | 3684.530 | 48, 126 | 3684.608 | 144 | 3684.683 | 50, 161 |
| 3684.304 | 189 | 3684.374 | 166 | 3684.531 | 48, 126 | 3684.609 | 144 | 3684.684 | 50, 161 |
| 3684.305 | 189 | 3684.375 | 166 | 3684.532 | 48, 126 | 3684.610 | 144 | 3684.685 | 50, 161 |
| 3684.306 | 189 | 3684.376 | 166 | 3684.533 | 48, 126 | 3684.611 | 145 | 3684.686 | 50, 161 |
| 3684.307 | 189 | 3684.377 | 166 | 3684.534 | 48, 126 | 3684.612 | 145 | 3684.687 | 50, 161 |
| 3684.311 | 189 | 3684.378 | 166 | 3684.535 | 48, 126 | 3684.614 | 49, 128 | 3684.688 | 50, 161 |
| 3684.312 | 189 | 3684.379 | 166 | 3684.536 | 48, 126 | 3684.615 | 49, 128 | 3684.689 | 50, 161 |
| 3684.313 | 189 | 3684.380 | 166 | 3684.537 | 48, 126 | 3684.616 | 49, 128 | 3684.691 | 50, 161 |
| 3684.314 | 189 | 3684.381 | 166 | 3684.538 | 48, 126 | 3684.617 | 49, 128 | 3684.692 | 50, 161 |
| 3684.317 | 186 | 3684.382 | 166 | 3684.539 | 48, 126 | 3684.618 | 49, 128 | 3684.693 | 50, 161 |
| 3684.320 | 187 | 3684.383 | 166 | 3684.540 | 48, 126 | 3684.619 | 49, 128 | 3684.694 | 50, 161 |

LIST OF ORDER NUMBERS

| Order No. | Page | Order No. | Page | Order No. | Page | Order No. | Page | Order No. | Page |
|-----------|---------|-----------|---------|-----------|---------|-----------|----------|-----------|------|
| 3684.695 | 50, 161 | 3684.892 | 178 | 3685.179 | 179 | 3685.272 | 46, 140 | 3685.522 | 167 |
| 3684.696 | 50, 161 | 3684.893 | 178 | 3685.180 | 179 | 3685.273 | 145 | 3685.524 | 167 |
| 3684.698 | 50, 161 | 3684.894 | 178 | 3685.181 | 179 | 3685.274 | 145 | 3685.525 | 167 |
| 3684.700 | 50, 161 | 3684.895 | 178 | 3685.182 | 179 | 3685.275 | 145 | 3685.526 | 167 |
| 3684.701 | 50, 161 | 3684.896 | 178 | 3685.183 | 179 | 3685.276 | 57 | 3685.527 | 167 |
| 3684.702 | 50, 161 | 3684.897 | 178 | 3685.184 | 179 | 3685.277 | 57 | 3685.528 | 167 |
| 3684.703 | 50, 161 | 3684.898 | 178 | 3685.185 | 179 | 3685.279 | 172 | 3685.529 | 167 |
| 3684.714 | 52, 162 | 3684.899 | 178 | 3685.186 | 179 | 3685.280 | 172 | 3685.530 | 167 |
| 3684.715 | 52, 162 | 3684.900 | 178 | 3685.187 | 179 | 3685.281 | 31 | 3685.532 | 167 |
| 3684.716 | 52, 162 | 3684.901 | 178 | 3685.188 | 179 | 3685.282 | 203 | 3685.533 | 167 |
| 3684.717 | 52, 162 | 3684.902 | 178 | 3685.189 | 179 | 3685.282 | 203 | 3685.534 | 167 |
| 3684.718 | 52, 162 | 3684.903 | 178 | 3685.190 | 179 | 3685.286 | 150 | 3685.535 | 167 |
| 3684.719 | 52, 162 | 3684.904 | 178 | 3685.191 | 179 | 3685.289 | 203 | 3685.536 | 167 |
| 3684.720 | 52, 162 | 3684.905 | 178 | 3685.192 | 179 | 3685.290 | 203 | 3685.537 | 167 |
| 3684.721 | 52, 162 | 3684.906 | 178 | 3685.193 | 179 | 3685.291 | 151 | 3685.538 | 167 |
| 3684.722 | 52, 162 | 3684.907 | 178 | 3685.194 | 179 | 3685.292 | 151 | 3685.540 | 167 |
| 3684.723 | 52, 162 | 3684.908 | 178 | 3685.195 | 179 | 3685.294 | 185 | 3685.541 | 167 |
| 3684.724 | 52, 162 | 3684.909 | 178 | 3685.196 | 179 | 3685.302 | 187 | 3685.542 | 167 |
| 3684.725 | 52, 162 | 3684.910 | 178 | 3685.197 | 203 | 3685.303 | 187 | 3685.543 | 167 |
| 3684.726 | 52, 163 | 3684.911 | 178 | 3685.198 | 177 | 3685.304 | 197 | 3685.544 | 167 |
| 3684.727 | 52, 163 | 3684.912 | 178 | 3685.229 | 56 | 3685.306 | 197 | 3685.545 | 167 |
| 3684.728 | 52, 163 | 3684.913 | 178 | 3685.231 | 31 | 3685.307 | 197 | 3685.546 | 167 |
| 3684.729 | 52, 163 | 3684.914 | 178 | 3685.232 | 31 | 3685.319 | 170 | 3685.548 | 173 |
| 3684.730 | 52, 163 | 3684.915 | 178 | 3685.233 | 31 | 3685.328 | 200 | 3685.549 | 173 |
| 3684.731 | 52, 163 | 3684.916 | 178 | 3685.234 | 31 | 3685.329 | 200 | 3685.550 | 173 |
| 3684.732 | 52, 163 | 3684.917 | 178 | 3685.235 | 32 | 3685.331 | 200 | 3685.551 | 173 |
| 3684.733 | 52, 163 | 3684.918 | 178 | 3685.236 | 32 | 3685.332 | 200 | 3685.552 | 173 |
| 3684.734 | 52, 163 | 3684.919 | 178 | 3685.237 | 32 | 3685.348 | 179 | 3685.553 | 173 |
| 3684.735 | 52, 163 | 3684.920 | 178 | 3685.238 | 31 | 3685.349 | 179 | 3685.554 | 173 |
| 3684.736 | 163 | 3684.921 | 178 | 3685.239 | 31 | 3685.350 | 178 | 3685.555 | 173 |
| 3684.737 | 163 | 3684.922 | 178 | 3685.240 | 31 | 3685.429 | 178 | 3685.556 | 173 |
| 3684.738 | 178 | 3684.923 | 178 | 3685.241 | 33 | 3685.490 | 176 | 3685.557 | 173 |
| 3684.739 | 178 | 3684.924 | 178 | 3685.242 | 33 | 3685.491 | 176 | 3685.558 | 173 |
| 3684.740 | 178 | 3684.925 | 178 | 3685.243 | 33 | 3685.492 | 176, 184 | 3685.559 | 173 |
| 3684.741 | 178 | 3684.926 | 178 | 3685.244 | 33 | 3685.493 | 176 | 3685.560 | 173 |
| 3684.742 | 178 | 3684.927 | 178 | 3685.245 | 50, 161 | 3685.494 | 176, 184 | 3685.561 | 173 |
| 3684.743 | 178 | 3684.928 | 178 | 3685.246 | 50, 161 | 3685.495 | 176 | 3685.562 | 173 |
| 3684.744 | 178 | 3684.929 | 178 | 3685.247 | 50, 161 | 3685.496 | 176 | 3685.563 | 173 |
| 3684.745 | 178 | 3684.930 | 178 | 3685.248 | 50, 161 | 3685.497 | 176 | 3685.564 | 173 |
| 3684.746 | 178 | 3684.953 | 155 | 3685.249 | 50, 161 | 3685.498 | 176 | 3685.566 | 173 |
| 3684.747 | 178 | 3684.954 | 155 | 3685.250 | 50, 161 | 3685.499 | 176 | 3685.567 | 173 |
| 3684.748 | 178 | 3684.955 | 34, 132 | 3685.251 | 50, 161 | 3685.500 | 167 | 3685.568 | 173 |
| 3684.807 | 56, 147 | 3684.956 | 34, 132 | 3685.252 | 50, 161 | 3685.501 | 167 | 3685.569 | 175 |
| 3684.808 | 147 | 3684.957 | 50, 161 | 3685.253 | 50, 161 | 3685.502 | 167 | 3685.570 | 175 |
| 3684.812 | 187 | 3684.958 | 50, 161 | 3685.254 | 50, 161 | 3685.503 | 167 | 3685.571 | 175 |
| 3684.813 | 187 | 3684.960 | 34, 132 | 3685.256 | 203 | 3685.504 | 167 | 3685.572 | 175 |
| 3684.814 | 187 | 3684.961 | 39, 133 | 3685.257 | 155 | 3685.505 | 167 | 3685.573 | 175 |
| 3684.839 | 188 | 3684.962 | 41, 135 | 3685.258 | 155 | 3685.506 | 167 | 3685.574 | 175 |
| 3684.840 | 188 | 3684.963 | 44, 138 | 3685.259 | 155 | 3685.508 | 167 | 3685.575 | 175 |
| 3684.841 | 188 | 3684.964 | 46, 140 | 3685.260 | 157 | 3685.509 | 167 | 3685.576 | 175 |
| 3684.842 | 188 | 3684.965 | 144 | 3685.261 | 157 | 3685.510 | 167 | 3685.577 | 175 |
| 3684.870 | 187 | 3684.966 | 144 | 3685.262 | 157 | 3685.511 | 167 | 3685.578 | 175 |
| 3684.871 | 187 | 3684.974 | 56, 147 | 3685.263 | 157 | 3685.512 | 167 | 3685.579 | 175 |
| 3684.872 | 187 | 3684.975 | 56, 147 | 3685.264 | 157 | 3685.513 | 167 | 3685.580 | 175 |
| 3684.885 | 178 | 3684.976 | 178 | 3685.265 | 157 | 3685.514 | 167 | 3685.581 | 175 |
| 3684.886 | 178 | 3684.977 | 178 | 3685.266 | 172 | 3685.516 | 167 | 3685.582 | 175 |
| 3684.887 | 178 | 3685.000 | 172 | 3685.267 | 34, 132 | 3685.517 | 167 | 3685.583 | 175 |
| 3684.888 | 178 | 3685.097 | 203 | 3685.268 | 41, 135 | 3685.518 | 167 | 3685.584 | 175 |
| 3684.889 | 178 | 3685.146 | 172 | 3685.269 | 39, 133 | 3685.519 | 167 | 3685.585 | 175 |
| 3684.890 | 178 | 3685.177 | 179 | 3685.270 | 44, 138 | 3685.520 | 167 | 3685.586 | 175 |
| 3684.891 | 178 | 3685.178 | 179 | 3685.271 | 144 | 3685.521 | 167 | 3685.587 | 168 |

LIST OF ORDER NUMBERS

| Order No. | Page | Order No. | Page | Order No. | Page | Order No. | Page | Order No. | Page |
|-----------|----------|-----------|---------|-----------|----------|-----------|---------|-----------|----------|
| 3685.588 | 168 | 3685.660 | 185 | 3685.748 | 177 | 3685.896 | 48, 126 | 3686.568 | 254 |
| 3685.589 | 168 | 3685.661 | 185 | 3685.749 | 177 | 3685.897 | 48, 126 | 3686.569 | 254 |
| 3685.590 | 168 | 3685.662 | 185 | 3685.750 | 177 | 3685.898 | 48, 126 | 3686.570 | 240, 241 |
| 3685.591 | 173 | 3685.663 | 185 | 3685.751 | 177 | 3685.899 | 48, 126 | 3686.572 | 172 |
| 3685.592 | 173 | 3685.664 | 185 | 3685.752 | 177 | 3685.959 | 48, 126 | 3686.573 | 172 |
| 3685.595 | 176 | 3685.665 | 185 | 3685.753 | 177 | 3685.966 | 172 | 3686.574 | 172 |
| 3685.596 | 176 | 3685.667 | 185 | 3685.754 | 177 | 3685.967 | 172 | 3686.585 | 254 |
| 3685.597 | 176 | 3685.668 | 185 | 3685.755 | 177 | 3685.985 | 38, 132 | 3686.586 | 254 |
| 3685.598 | 176 | 3685.669 | 185 | 3685.756 | 177 | 3685.991 | 41, 135 | 3686.587 | 254 |
| 3685.599 | 176 | 3685.670 | 185 | 3685.757 | 177 | 3686.005 | 46, 140 | 3686.588 | 254 |
| 3685.600 | 176 | 3685.671 | 185 | 3685.758 | 177 | 3686.037 | 172 | 3686.589 | 254 |
| 3685.601 | 176 | 3685.672 | 185 | 3685.759 | 155 | 3686.063 | 155 | 3686.590 | 254 |
| 3685.602 | 176 | 3685.673 | 185 | 3685.761 | 176, 184 | 3686.136 | 156 | 3686.591 | 254 |
| 3685.603 | 176 | 3685.674 | 185 | 3685.762 | 176, 184 | 3686.137 | 156 | 3686.592 | 254 |
| 3685.604 | 176 | 3685.675 | 185 | 3685.763 | 176 | 3686.138 | 179 | 3686.593 | 254 |
| 3685.605 | 177 | 3685.676 | 185 | 3685.764 | 185 | 3686.139 | 179 | 3686.594 | 254 |
| 3685.606 | 177 | 3685.677 | 185 | 3685.765 | 185 | 3686.140 | 179 | 3686.595 | 254 |
| 3685.607 | 177 | 3685.678 | 185 | 3685.766 | 185 | 3686.149 | 144 | 3686.596 | 254 |
| 3685.608 | 177 | 3685.679 | 185 | 3685.767 | 184, 185 | 3686.159 | 45, 139 | 3686.597 | 254 |
| 3685.609 | 177 | 3685.680 | 185 | 3685.768 | 185 | 3686.191 | 45, 139 | 3686.598 | 254 |
| 3685.610 | 177 | 3685.681 | 185 | 3685.769 | 184, 185 | 3686.329 | 193 | 3686.599 | 254 |
| 3685.611 | 177 | 3685.683 | 184 | 3685.770 | 185 | 3686.359 | 193 | 3686.629 | 196 |
| 3685.612 | 177 | 3685.684 | 184 | 3685.771 | 185 | 3686.469 | 197 | 3686.634 | 252 |
| 3685.613 | 177 | 3685.685 | 184 | 3685.772 | 185 | 3686.471 | 197 | 3686.635 | 252 |
| 3685.614 | 50, 177 | 3685.686 | 184 | 3685.773 | 185 | 3686.472 | 197 | 3686.643 | 190 |
| 3685.615 | 177 | 3685.687 | 184 | 3685.774 | 185 | 3686.473 | 252 | 3686.644 | 190 |
| 3685.616 | 177 | 3685.688 | 184 | 3685.775 | 185 | 3686.474 | 252 | 3686.645 | 190 |
| 3685.617 | 177 | 3685.689 | 184 | 3685.776 | 185 | 3686.495 | 253 | 3686.646 | 190 |
| 3685.618 | 177 | 3685.690 | 184 | 3685.777 | 185 | 3686.496 | 253 | 3686.647 | 191 |
| 3685.626 | 172 | 3685.691 | 184 | 3685.783 | 151 | 3686.497 | 253 | 3686.648 | 191 |
| 3685.627 | 172 | 3685.692 | 184 | 3685.784 | 151 | 3686.498 | 253 | 3686.649 | 191 |
| 3685.628 | 185 | 3685.693 | 184 | 3685.785 | 151 | 3686.499 | 253 | 3686.650 | 191 |
| 3685.629 | 184, 185 | 3685.694 | 184 | 3685.786 | 151 | 3686.500 | 253 | 3686.655 | 192 |
| 3685.630 | 184, 185 | 3685.695 | 184 | 3685.787 | 151 | 3686.501 | 253 | 3686.656 | 192 |
| 3685.630 | 184, 185 | 3685.696 | 184 | 3685.788 | 151 | 3686.502 | 253 | 3686.657 | 192 |
| 3685.631 | 184, 185 | 3685.697 | 184 | 3685.789 | 56 | 3686.503 | 253 | 3686.658 | 190 |
| 3685.632 | 185 | 3685.698 | 184 | 3685.790 | 157 | 3686.504 | 253 | 3686.659 | 190 |
| 3685.633 | 184, 185 | 3685.699 | 184 | 3685.793 | 48, 126 | 3686.505 | 253 | 3686.805 | 186 |
| 3685.634 | 184, 185 | 3685.700 | 184 | 3685.794 | 48, 126 | 3686.506 | 253 | 3686.900 | 168 |
| 3685.635 | 184, 185 | 3685.701 | 184 | 3685.795 | 48, 126 | 3686.507 | 253 | 3686.901 | 168 |
| 3685.636 | 184 | 3685.702 | 184 | 3685.796 | 48, 126 | 3686.508 | 253 | 3686.902 | 168 |
| 3685.637 | 184 | 3685.703 | 184 | 3685.797 | 48, 126 | 3686.509 | 253 | 3686.903 | 168 |
| 3685.638 | 184 | 3685.704 | 184 | 3685.798 | 48, 126 | 3686.510 | 253 | 3686.904 | 168 |
| 3685.639 | 184 | 3685.705 | 184 | 3685.799 | 48, 126 | 3686.511 | 253 | 3686.905 | 168 |
| 3685.640 | 184 | 3685.706 | 184 | 3685.805 | 172 | 3686.512 | 253 | 3686.906 | 168 |
| 3685.641 | 184 | 3685.707 | 184 | 3685.813 | 161, 162 | 3686.513 | 253 | 3686.907 | 168 |
| 3685.642 | 50, 161 | 3685.708 | 184 | 3685.814 | 161, 162 | 3686.514 | 253 | 3686.908 | 169 |
| 3685.645 | 184, 185 | 3685.709 | 184 | 3685.824 | 172 | 3686.536 | 171 | 3686.909 | 169 |
| 3685.646 | 184, 185 | 3685.710 | 184 | 3685.850 | 48, 126 | 3686.555 | 254 | 3686.916 | 203 |
| 3685.648 | 184, 185 | 3685.711 | 184 | 3685.851 | 50, 161 | 3686.556 | 254 | 3686.917 | 203 |
| 3685.649 | 184, 185 | 3685.713 | 185 | 3685.852 | 50, 161 | 3686.557 | 254 | 3686.919 | 45, 139 |
| 3685.650 | 185 | 3685.714 | 185 | 3685.853 | 50, 161 | 3686.558 | 254 | 3686.924 | 203 |
| 3685.651 | 185 | 3685.715 | 185 | 3685.855 | 161, 162 | 3686.559 | 254 | 3686.973 | 55, 146 |
| 3685.652 | 185 | 3685.716 | 185 | 3685.856 | 51, 162 | 3686.560 | 254 | 3686.974 | 55, 146 |
| 3685.653 | 185 | 3685.717 | 185 | 3685.857 | 51, 162 | 3686.561 | 254 | 3686.975 | 55, 146 |
| 3685.654 | 185 | 3685.718 | 185 | 3685.890 | 48 | 3686.562 | 254 | 3686.976 | 55, 146 |
| 3685.655 | 185 | 3685.743 | 48, 126 | 3685.891 | 48, 126 | 3686.563 | 254 | 3686.977 | 55, 146 |
| 3685.656 | 185 | 3685.744 | 48, 126 | 3685.892 | 48, 126 | 3686.564 | 254 | 3686.978 | 55, 146 |
| 3685.657 | 185 | 3685.745 | 48, 127 | 3685.893 | 48, 126 | 3686.565 | 254 | 3686.979 | 55, 146 |
| 3685.658 | 185 | 3685.746 | 177 | 3685.894 | 48, 126 | 3686.566 | 254 | 3686.980 | 55, 146 |
| 3685.659 | 185 | 3685.747 | 177 | 3685.895 | 48, 126 | 3686.567 | 254 | 3686.981 | 55, 146 |

LIST OF ORDER NUMBERS

| Order No. | Page | Order No. | Page | Order No. | Page | Order No. | Page | Order No. | Page |
|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|------|
| 3686.989 | 183 | 3687.615 | 191 | 3687.687 | 67, 77 | 3688.111 | 63, 130 | 3689.307 | 238 |
| 3687.014 | 160 | 3687.618 | 50, 161 | 3687.688 | 67, 77 | 3688.112 | 64 | 3689.308 | 238 |
| 3687.015 | 203 | 3687.619 | 50, 161 | 3687.689 | 67, 77 | 3688.113 | 64 | 3689.309 | 238 |
| 3687.020 | 203 | 3687.620 | 50, 161 | 3687.690 | 67, 77 | 3688.114 | 59 | 3689.310 | 238 |
| 3687.021 | 202 | 3687.621 | 50, 161 | 3687.691 | 67, 77 | 3688.115 | 59 | 3689.311 | 238 |
| 3687.050 | 203 | 3687.623 | 50, 161 | 3687.692 | 53, 163 | 3688.116 | 59 | 3689.312 | 238 |
| 3687.051 | 203 | 3687.624 | 53, 163 | 3687.709 | 257 | 3688.117 | 59 | 3689.313 | 238 |
| 3687.052 | 160 | 3687.625 | 53, 163 | 3687.710 | 257 | 3688.118 | 199, 211 | 3689.314 | 239 |
| 3687.146 | 203 | 3687.626 | 161, 162 | 3687.711 | 257 | 3688.121 | 211 | 3689.315 | 239 |
| 3687.519 | 185, 202 | 3687.627 | 50, 161 | 3687.724 | 40, 134 | 3688.123 | 211 | 3689.316 | 239 |
| 3687.520 | 184 | 3687.628 | 50, 161 | 3687.726 | 154 | 3688.130 | 199 | 3689.317 | 239 |
| 3687.521 | 184 | 3687.629 | 50, 161 | 3687.739 | 153 | 3688.528 | 198 | 3689.318 | 239 |
| 3687.522 | 184 | 3687.630 | 51, 162 | 3687.814 | 97 | 3688.603 | 240 | 3689.319 | 239 |
| 3687.523 | 184 | 3687.631 | 51, 162 | 3687.815 | 97 | 3688.606 | 55, 146 | 3689.320 | 239 |
| 3687.524 | 184 | 3687.633 | 51, 162 | 3687.816 | 97 | 3688.607 | 240 | 3689.321 | 239 |
| 3687.525 | 184 | 3687.634 | 51, 162 | 3687.817 | 97 | 3688.608 | 241 | 3689.322 | 239 |
| 3687.526 | 154 | 3687.635 | 51, 162 | 3687.818 | 97 | 3688.609 | 55, 146 | 3689.323 | 239 |
| 3687.527 | 154 | 3687.637 | 51, 162 | 3687.819 | 97 | 3688.610 | 55, 111 | 3689.324 | 239 |
| 3687.528 | 154 | 3687.638 | 51, 162 | 3687.820 | 97 | 3688.611 | 55, 111 | 3689.325 | 239 |
| 3687.529 | 173 | 3687.639 | 51, 162 | 3687.821 | 97 | 3688.612 | 55, 146 | 3689.326 | 239 |
| 3687.530 | 173 | 3687.640 | 53, 163 | 3687.822 | 97 | 3688.613 | 55, 146 | 3689.327 | 239 |
| 3687.531 | 173 | 3687.641 | 53, 163 | 3687.823 | 97 | 3688.614 | 55, 146 | 3689.329 | 241 |
| 3687.536 | 184 | 3687.642 | 53, 163 | 3687.832 | 156 | 3688.615 | 55, 146 | 3689.330 | 241 |
| 3687.537 | 184 | 3687.643 | 53, 163 | 3687.742 | 75 | 3688.616 | 55, 146 | 3689.331 | 241 |
| 3687.538 | 184 | 3687.644 | 53, 163 | 3687.743 | 73 | 3688.633 | 55, 146 | 3689.332 | 241 |
| 3687.539 | 184 | 3687.645 | 53, 163 | 3687.744 | 75 | 3688.634 | 55, 146 | 3750.000 | 114 |
| 3687.545 | 174 | 3687.646 | 53, 163 | 3687.746 | 73 | 3688.658 | 180 | 3750.002 | 114 |
| 3687.555 | 184 | 3687.647 | 53, 163 | 3687.747 | 73 | 3688.659 | 181 | 3750.004 | 114 |
| 3687.556 | 184 | 3687.648 | 53, 163 | 3687.748 | 73 | 3688.660 | 181 | 3750.030 | 114 |
| 3687.557 | 184 | 3687.649 | 53, 163 | 3687.749 | 73 | 3688.661 | 181 | 3750.032 | 114 |
| 3687.558 | 184 | 3687.650 | 53, 163 | 3687.750 | 75 | 3688.662 | 181 | 3750.034 | 114 |
| 3687.559 | 184 | 3687.651 | 53, 163 | 3687.751 | 75 | 3688.663 | 181 | 3750.100 | 113 |
| 3687.560 | 184 | 3687.652 | 53, 163 | 3687.776 | 73 | 3688.695 | 198 | 3750.102 | 113 |
| 3687.561 | 184 | 3687.655 | 176 | 3687.777 | 73 | 3688.709 | 203 | 3750.104 | 113 |
| 3687.562 | 184 | 3687.656 | 176 | 3687.800 | 73 | 3688.770 | 169 | 3750.110 | 113 |
| 3687.563 | 184 | 3687.657 | 176 | 3687.924 | 158, 193 | 3688.771 | 169 | 3750.112 | 113 |
| 3687.564 | 184 | 3687.658 | 176 | 3687.932 | 172 | 3688.772 | 169 | 3750.114 | 113 |
| 3687.565 | 184 | 3687.659 | 176 | 3687.933 | 172 | 3688.773 | 169 | 3750.200 | 113 |
| 3687.566 | 184 | 3687.660 | 176 | 3687.934 | 172 | 3688.780 | 170 | 3750.202 | 113 |
| 3687.567 | 184 | 3687.661 | 176 | 3687.936 | 156 | 3688.781 | 170 | 3750.204 | 113 |
| 3687.568 | 184 | 3687.662 | 176 | 3687.937 | 156 | 3688.784 | 170 | 3750.210 | 113 |
| 3687.574 | 144 | 3687.663 | 176 | 3687.951 | 156 | 3688.785 | 170 | 3750.212 | 113 |
| 3687.575 | 144 | 3687.664 | 176 | 3687.955 | 172 | 3688.786 | 171 | 3750.214 | 113 |
| 3687.576 | 144 | 3687.665 | 201 | 3687.956 | 160 | 3688.787 | 171 | 3750.220 | 113 |
| 3687.577 | 144 | 3687.666 | 201 | 3688.000 | 34 | 3688.790 | 171 | 3750.222 | 113 |
| 3687.585 | 184 | 3687.667 | 67, 77 | 3688.001 | 39, 133 | 3688.791 | 171 | 3750.224 | 113 |
| 3687.587 | 184 | 3687.668 | 67, 77 | 3688.002 | 41, 135 | 3689.036 | 156 | 3750.300 | 113 |
| 3687.588 | 184 | 3687.669 | 67, 77 | 3688.003 | 44, 138 | 3689.089 | 155 | 3750.302 | 113 |
| 3687.589 | 185 | 3687.670 | 67, 77 | 3688.004 | 46, 140 | 3689.090 | 156 | 3750.304 | 113 |
| 3687.590 | 185 | 3687.671 | 77 | 3688.005 | 154 | 3689.091 | 155 | 3750.310 | 114 |
| 3687.591 | 185 | 3687.672 | 77 | 3688.100 | 63, 127 | 3689.092 | 156 | 3750.312 | 114 |
| 3687.600 | 46, 140 | 3687.673 | 77 | 3688.101 | 63, 127 | 3689.093 | 155 | 3750.314 | 114 |
| 3687.601 | 46, 140 | 3687.674 | 77 | 3688.102 | 63, 127 | 3689.097 | 156 | 3750.320 | 114 |
| 3687.602 | 46, 140 | 3687.677 | 53, 163 | 3688.103 | 63, 127 | 3689.098 | 156 | 3750.322 | 114 |
| 3687.603 | 46, 140 | 3687.680 | 67, 77 | 3688.104 | 42, 62 | 3689.300 | 238 | 3750.324 | 114 |
| 3687.609 | 252 | 3687.681 | 67, 77 | 3688.105 | 64, 164 | 3689.301 | 238 | 3750.330 | 114 |
| 3687.610 | 252 | 3687.682 | 67, 77 | 3688.106 | 64, 164 | 3689.302 | 238 | 3750.332 | 114 |
| 3687.611 | 252 | 3687.683 | 67, 77 | 3688.107 | 64, 164 | 3689.303 | 238 | 3750.334 | 114 |
| 3687.612 | 191 | 3687.684 | 67, 77 | 3688.108 | 64, 164 | 3689.304 | 238 | 3750.340 | 114 |
| 3687.613 | 191 | 3687.685 | 67, 77 | 3688.109 | 64, 164 | 3689.305 | 238 | 3750.342 | 114 |
| 3687.614 | 191 | 3687.686 | 67, 77 | 3688.110 | 63, 130 | 3689.306 | 238 | 3750.344 | 114 |

LIST OF ORDER NUMBERS

| Order No. | Page | Order No. | Page | Order No. | Page | Order No. | Page | Order No. | Page |
|-----------|------|-----------|----------|-----------|------|-----------|------|-----------|----------|
| 3750.350 | 113 | 3750.922 | 114 | 3751.810 | 119 | 3981.942 | 107 | 3983.000 | 102 |
| 3750.352 | 113 | 3750.924 | 114 | 3751.820 | 118 | 3981.950 | 107 | 3983.010 | 102 |
| 3750.354 | 113 | 3750.930 | 114 | 3751.830 | 118 | 3981.951 | 107 | 3983.020 | 102 |
| 3750.360 | 113 | 3750.932 | 114 | 3751.850 | 120 | 3981.952 | 107 | 3983.030 | 102 |
| 3750.362 | 113 | 3750.934 | 114 | 3751.852 | 120 | 3981.960 | 107 | 3983.040 | 104 |
| 3750.364 | 113 | 3751.100 | 114, 121 | 3751.854 | 120 | 3981.970 | 106 | 3983.050 | 104 |
| 3750.400 | 113 | 3751.120 | 114, 121 | 3751.900 | 118 | 3982.000 | 101 | 3983.060 | 104 |
| 3750.402 | 113 | 3751.130 | 114, 121 | 3751.910 | 118 | 3982.010 | 101 | 3983.070 | 104 |
| 3750.404 | 113 | 3751.150 | 114, 121 | 3751.920 | 118 | 3982.020 | 101 | 3983.080 | 104 |
| 3750.410 | 114 | 3751.160 | 114, 121 | 3751.930 | 118 | 3982.030 | 101 | 3983.090 | 104 |
| 3750.412 | 114 | 3751.170 | 114, 121 | 3798.000 | 118 | 3982.040 | 103 | 3983.100 | 104 |
| 3750.414 | 114 | 3751.180 | 114, 121 | 3901.000 | 109 | 3982.050 | 103 | 3983.110 | 106 |
| 3750.420 | 114 | 3751.200 | 120 | 3919.000 | 108 | 3982.060 | 103 | 3983.120 | 106 |
| 3750.422 | 114 | 3751.202 | 120 | 3981.200 | 108 | 3982.070 | 103 | 3983.130 | 106 |
| 3750.424 | 114 | 3751.204 | 120 | 3981.210 | 108 | 3982.080 | 103 | 3983.140 | 106 |
| 3750.430 | 114 | 3751.210 | 120 | 3981.220 | 108 | 3982.090 | 103 | 3983.150 | 106 |
| 3750.432 | 114 | 3751.212 | 120 | 3981.230 | 108 | 3982.100 | 103 | 3983.160 | 106 |
| 3750.434 | 114 | 3751.214 | 120 | 3981.240 | 108 | 3982.110 | 105 | 3983.170 | 106 |
| 3750.440 | 114 | 3751.250 | 118 | 3981.260 | 108 | 3982.120 | 105 | 3983.190 | 106 |
| 3750.442 | 114 | 3751.260 | 118 | 3981.270 | 108 | 3982.130 | 105 | 3983.290 | 102 |
| 3750.444 | 114 | 3751.270 | 118 | 3981.280 | 108 | 3982.140 | 105 | 3983.300 | 102 |
| 3750.450 | 113 | 3751.300 | 119 | 3981.290 | 108 | 3982.150 | 105 | 7094.600 | 203 |
| 3750.452 | 113 | 3751.310 | 119 | 3981.300 | 109 | 3982.160 | 105 | 9687.608 | 252 |
| 3750.454 | 113 | 3751.320 | 119 | 3981.310 | 109 | 3982.170 | 105 | 9810.337 | 240, 241 |
| 3750.600 | 114 | 3751.330 | 119 | 3981.320 | 109 | 3982.190 | 105 | 9810.338 | 240, 241 |
| 3750.602 | 114 | 3751.340 | 119 | 3981.330 | 109 | 3982.300 | 101 | 9901.417 | 202 |
| 3750.604 | 114 | 3751.350 | 119 | 3981.340 | 109 | 3982.370 | 108 | 9901.021 | 48, 127 |
| 3750.610 | 114 | 3751.360 | 120 | 3981.350 | 109 | 3982.380 | 108 | 9901.023 | 48, 127 |
| 3750.612 | 114 | 3751.370 | 120 | 3981.360 | 109 | 3982.390 | 108 | 9901.816 | 144 |
| 3750.614 | 114 | 3751.380 | 120 | 3981.370 | 109 | 3982.700 | 107 | 9901.991 | 139 |
| 3750.620 | 114 | 3751.400 | 117 | 3981.380 | 109 | 3982.701 | 107 | 9902.240 | 155 |
| 3750.622 | 114 | 3751.410 | 117 | 3981.390 | 111 | 3982.702 | 107 | 9904.131 | 240 |
| 3750.624 | 114 | 3751.420 | 117 | 3981.400 | 111 | 3982.710 | 107 | 9904.745 | 133 |
| 3750.630 | 114 | 3751.450 | 117 | 3981.410 | 111 | 3982.711 | 107 | 9904.928 | 252 |
| 3750.632 | 114 | 3751.460 | 117 | 3981.500 | 111 | 3982.712 | 107 | 9904.929 | 252 |
| 3750.634 | 114 | 3751.500 | 116 | 3981.700 | 107 | 3982.720 | 107 | 9904.930 | 252 |
| 3750.640 | 114 | 3751.510 | 116 | 3981.701 | 107 | 3982.730 | 107 | 9904.931 | 252 |
| 3750.642 | 114 | 3751.520 | 116 | 3981.702 | 107 | 3982.740 | 107 | 9904.932 | 252 |
| 3750.644 | 114 | 3751.530 | 114, 121 | 3981.710 | 107 | 3982.741 | 107 | 9904.933 | 252 |
| 3750.650 | 114 | 3751.540 | 114, 121 | 3981.711 | 107 | 3982.742 | 107 | 9905.105 | 240 |
| 3750.652 | 114 | 3751.600 | 114, 121 | 3981.712 | 107 | 3982.750 | 107 | 9905.574 | 172 |
| 3750.654 | 114 | 3751.610 | 114, 121 | 3981.720 | 107 | 3982.751 | 107 | 9905.990 | 172 |
| 3750.700 | 114 | 3751.620 | 114, 121 | 3981.730 | 107 | 3982.752 | 107 | 9906.727 | 48, 127 |
| 3750.702 | 114 | 3751.630 | 114, 121 | 3981.740 | 107 | 3982.760 | 107 | 9906.914 | 48, 127 |
| 3750.704 | 114 | 3751.640 | 116 | 3981.741 | 107 | 3982.770 | 107 | 9907.699 | 227 |
| 3750.710 | 114 | 3751.650 | 116 | 3981.742 | 107 | 3982.900 | 107 | 9908.721 | 38, 132 |
| 3750.712 | 114 | 3751.660 | 116 | 3981.750 | 107 | 3982.901 | 107 | 9908.722 | 40, 134 |
| 3750.714 | 114 | 3751.670 | 116 | 3981.751 | 107 | 3982.902 | 107 | 9908.723 | 42, 136 |
| 3750.720 | 114 | 3751.680 | 116 | 3981.752 | 107 | 3982.910 | 107 | 9909.193 | 255 |
| 3750.722 | 114 | 3751.690 | 116 | 3981.760 | 107 | 3982.911 | 107 | 9909.230 | 256 |
| 3750.724 | 114 | 3751.700 | 116 | 3981.770 | 107 | 3982.912 | 107 | 9909.483 | 235 |
| 3750.730 | 114 | 3751.710 | 116 | 3981.900 | 107 | 3982.920 | 107 | 9909.484 | 247 |
| 3750.732 | 114 | 3751.720 | 116 | 3981.901 | 107 | 3982.930 | 107 | 9910.007 | 252 |
| 3750.734 | 114 | 3751.730 | 116 | 3981.902 | 107 | 3982.940 | 107 | 9910.008 | 252 |
| 3750.900 | 114 | 3751.740 | 116 | 3981.910 | 107 | 3982.941 | 107 | 9910.009 | 252 |
| 3750.902 | 114 | 3751.750 | 116 | 3981.911 | 107 | 3982.942 | 107 | 9910.010 | 252 |
| 3750.904 | 114 | 3751.760 | 116 | 3981.912 | 107 | 3982.950 | 107 | 9910.011 | 252 |
| 3750.910 | 114 | 3751.770 | 116 | 3981.920 | 107 | 3982.951 | 107 | 9910.012 | 252 |
| 3750.912 | 114 | 3751.780 | 116 | 3981.930 | 107 | 3982.952 | 107 | 9910.013 | 252 |
| 3750.914 | 114 | 3751.790 | 116 | 3981.940 | 107 | 3982.960 | 107 | 9910.014 | 252 |
| 3750.920 | 114 | 3751.800 | 119 | 3981.941 | 107 | 3982.970 | 107 | 9910.015 | 252 |

LIST OF ORDER NUMBERS

| Order No. | Page | Order No. | Page | Order No. | Page | | |
|-----------|------|-----------|----------|-----------|----------|--|--|
| 9910.016 | 252 | 9912.522 | 137 | 9921.884 | 148 | | |
| 9910.944 | 232 | 9912.523 | 44 | 9921.885 | 148 | | |
| 9910.945 | 232 | 9912.828 | 153 | 9921.942 | 146 | | |
| 9910.946 | 233 | 9913.260 | 255 | 9921.943 | 146 | | |
| 9910.947 | 234 | 9913.748 | 256 | 9921.944 | 146 | | |
| 9910.948 | 233 | 9914.268 | 79, 129 | 9921.945 | 145, 147 | | |
| 9910.949 | 246 | 9916.222 | 199, 211 | 9921.946 | 108 | | |
| 9910.950 | 246 | 9916.676 | 110 | 9921.947 | 108 | | |
| 9910.954 | 246 | 9918.119 | 121 | 9921.948 | 108 | | |
| 9910.955 | 246 | 9918.120 | 121 | 9921.949 | 108 | | |
| 9910.956 | 247 | 9918.121 | 121 | 9921.950 | 108 | | |
| 9910.957 | 247 | 9918.122 | 121 | 9921.951 | 108 | | |
| 9910.958 | 248 | 9918.123 | 121 | 9921.952 | 108 | | |
| 9910.959 | 248 | 9918.125 | 121 | 9921.953 | 108 | | |
| 9910.960 | 249 | 9918.814 | 152 | 9921.954 | 108 | | |
| 9911.220 | 227 | 9918.815 | 152 | 9921.666 | 211 | | |
| 9911.570 | 227 | 9918.816 | 152 | 9921.879 | 164 | | |
| 9911.571 | 227 | 9918.817 | 152 | | | | |
| 9911.758 | 222 | 9918.818 | 152 | | | | |
| 9911.760 | 222 | 9918.819 | 152 | | | | |
| 9911.803 | 223 | 9918.820 | 152 | | | | |
| 9911.885 | 226 | 9918.821 | 152 | | | | |
| 9911.886 | 226 | 9919.472 | 116 | | | | |
| 9911.887 | 226 | 9919.605 | 242 | | | | |
| 9911.888 | 226 | 9919.795 | 99 | | | | |
| 9911.889 | 226 | 9919.796 | 99 | | | | |
| 9911.890 | 226 | 9919.797 | 99 | | | | |
| 9911.891 | 227 | 9919.798 | 99 | | | | |
| 9911.892 | 227 | 9919.799 | 99 | | | | |
| 9911.893 | 227 | 9919.800 | 99 | | | | |
| 9912.293 | 257 | 9919.834 | 158 | | | | |
| 9912.294 | 257 | 9919.911 | 243 | | | | |
| 9912.362 | 252 | 9919.912 | 243 | | | | |
| 9912.410 | 252 | 9919.999 | 97 | | | | |
| 9912.411 | 252 | 9920.069 | 137 | | | | |
| 9912.412 | 252 | 9921.685 | 149 | | | | |
| 9912.413 | 252 | 9921.710 | 149 | | | | |
| 9912.414 | 252 | 9921.721 | 79, 129 | | | | |
| 9912.415 | 252 | 9921.722 | 148 | | | | |
| 9912.416 | 252 | 9921.723 | 148 | | | | |
| 9912.417 | 252 | 9921.724 | 148 | | | | |
| 9912.418 | 252 | 9921.725 | 79, 129 | | | | |
| 9912.419 | 252 | 9921.726 | 79, 129 | | | | |
| 9912.420 | 252 | 9921.788 | 132 | | | | |
| 9912.421 | 252 | 9921.789 | 132 | | | | |
| 9912.422 | 252 | 9921.790 | 133 | | | | |
| 9912.423 | 252 | 9921.791 | 133 | | | | |
| 9912.424 | 252 | 9921.793 | 132 | | | | |
| 9912.425 | 252 | 9921.795 | 134 | | | | |
| 9912.426 | 252 | 9921.798 | 133 | | | | |
| 9912.427 | 252 | 9921.799 | 133 | | | | |
| 9912.428 | 252 | 9921.803 | 142 | | | | |
| 9912.429 | 252 | 9921.860 | 77 | | | | |
| 9912.430 | 252 | 9921.861 | 77 | | | | |
| 9912.431 | 252 | 9921.862 | 77 | | | | |
| 9912.432 | 252 | 9921.863 | 77 | | | | |
| 9912.433 | 252 | 9921.864 | 77 | | | | |
| 9912.434 | 252 | 9921.865 | 77 | | | | |
| 9912.435 | 252 | 9921.866 | 77 | | | | |
| 9912.436 | 252 | 9921.867 | 77 | | | | |
| 9912.483 | 256 | 9921.883 | 148 | | | | |

LIST OF TECHNICAL TERMS

A

| | Page |
|----------------------------------|------|
| Accessories | |
| – for subracks | 126 |
| – CPCI/VMEbus | 257 |
| – MicroTCA | 225 |
| – HeiCase | 116 |
| – HeiPac Vario-Module | 107 |
| AC-fans | |
| – for subracks | 190 |
| – for microcomputer systems | 190 |
| Adaptor | 65 |
| Adaptor rail | |
| – rear, centre (E) | 140 |
| AdvancedMC | |
| – Face Plates | 226 |
| – Filler Sheets | 227 |
| Air baffle | 187 |
| Air block panel | 158 |
| Air partition | 187 |
| Aluminium front door | |
| – vertically hinged, for HeiCase | 119 |
| Aluminium centre part | |
| – for three-part guide rails | 157 |
| Assembly parts | |
| – for Electronic-Packaging | 202 |
| AT/ATX power supply | 199 |
| ATX Industrial PCs | 210 |

B

| | Page |
|--|------|
| Backplane 9 U Monolithic with power supply connector | 241 |
| Backplane VME J1/J2 Monolithic | 253 |
| Backplane | |
| – CPCI | 238 |
| – CPCISerial | 242 |
| – VME | 253 |
| – VME64x | 252 |
| – VMEbus, technical specification | 250 |
| Bottom covers | |
| – for HeiPac Vario-Module | 107 |

C

| | Page |
|-------------------------------|------|
| Card retainer | 215 |
| Carrying handle/support stand | |
| – for HeiPac Vario-Module | 111 |
| Carrying Handles | |
| – for HeiCase | 118 |
| – for HeiPac Vario-Module | 109 |

| | |
|--|-----|
| Climate Control | 186 |
| Components for EMC Installation, for subracks | 146 |
| Conductive strip (H) | 145 |
| Contact strip, EMC | 146 |
| Connection cable | |
| – for AC fans | 191 |
| Verbindungsstift | |
| – for injector/extractor handles types IV, IVs and VII | 170 |
| Contact springs | 154 |
| Controller modules (CMC & LAN) | 255 |
| Controller modules (CMC & RS232) | 255 |
| Conversion module | 227 |
| Covers | |
| – for lateral space | 173 |
| – for drives | 214 |
| – for HeiPac Vario-Module | 107 |
| – for mezzanine front panels | 181 |
| – for subracks | 161 |
| CPCI | |
| – Backplane | 238 |
| – Busplatinen, technical specification | 236 |
| – Rack-mount systems | 230 |
| – Accessories | 257 |
| CPCI power supply | |
| – Open Frame 400 W | 196 |
| – Plug-in | 197 |
| CPCI/VMEbus | |
| – MPS monitoring | 255 |
| – Accessories | 257 |
| CubeTCA | 224 |

D

| | Page |
|--|------|
| DC-fan | |
| – for subracks | 191 |
| – for rear panels | 216 |
| Display- and controller-module (CMC & RS232) | 256 |
| Door cut-out trim | |
| – for subracks | 180 |
| Drive holder | 215 |

E

| | Page |
|-------------------------------------|------|
| Earthingset for HeiPac Vario-Module | 110 |
| Earthingset for HeiCase | 118 |
| EMC | |
| – Expansion accessories | 146 |
| – Gaskets | 146 |
| – Front/rear panels for ventilation | 187 |
| – Front panels, handles | 166 |

| | |
|------------------------------------|-----|
| – Front panels hinged | 180 |
| – Contact strip | 146 |
| – Rear panels for fan installation | 188 |
| – Shielding plate for fans | 193 |
| – Seals for mezzanine cut-outs | 181 |
| Enclosure | |
| – for Industrial PCs | 208 |
| End pieces | |
| – for three-part guide rails | 157 |
| – for guide rails, aluminium | 155 |
| ESD contacts | 159 |
| Extractor handle | |
| – Type I and Type II | 168 |
| – Type III | 173 |

F

| | Page |
|--|------|
| Face Plates | 226 |
| Fan module | 257 |
| Fan mounting plate | 186 |
| Fans | |
| – AC fans | 190 |
| – DC fans | 191 |
| Feet | |
| – for HeiCase | 120 |
| – for HeiPac Vario-Module | 108 |
| Flange 19" | 128 |
| Filler Sheets | 227 |
| Finger guard | |
| – for AC/DC fans | 192 |
| Filtered IEC mains inlet | 257 |
| Front panels | |
| – for type III extractor handle | 173 |
| – for handles type I, II, IV, IVs or VII | 166 |
| – for handles type V and VI | 176 |
| – with handles type I or II | 165 |
| – with handles type V and PCB holder | 174 |
| – for ATX power supply | 200 |
| – for subracks | 165 |
| – to conceal the vertical support | 150 |
| Front corner trims | |
| – for HeiPac Vario-Module | 109 |
| Front doot | |
| – for HeiCase | 119 |
| Front flanges | |
| – for HeiPac Vario-Module | 108 |
| Front/rear panels for ventilation | 187 |
| Front trim panels for AT/ATX | 217 |

G

| | Page |
|---------------------|------|
| Ground contact | 156 |
| Guide rails | |
| – for 4,4" | 158 |
| – for subracks | 154 |
| – for drive modules | 183 |

H

| | Page |
|---|------|
| Handles | |
| – for front panels | 165 |
| – for Industrial PCs | 215 |
| – for subracks | 57 |
| - Type V und VI | 176 |
| HeiBox ALU 1 U | 96 |
| HeiBox ECO 1 U | 98 |
| HeiCase | 112 |
| HeiPac | |
| – ATX | 208 |
| – Compact | 66 |
| – EASY | 82 |
| – Eco | 58 |
| – for CPCI | 232 |
| – for VMEbus | 246 |
| – HEAVY | |
| – Table of horizontal rails | 130 |
| – Power Supplies | 196 |
| – Vario | 30 |
| – Vario EMC | 30 |
| – Vario-Module | 100 |
| HeiPac box type plug-in unit | |
| – Individual components | 184 |
| – Type I | 182 |
| Horizontal mounting kit | 151 |
| | |
| Identification strip (J) | 144 |
| Identification strip | |
| – for type I, II extractor handle and type IV injector/extractor handle | 168 |
| – for type V handles | 176 |
| Industrial PCs | 206 |
| Instrument cases/system enclosures | |
| – HeiCase | 112 |
| – HeiPac Vario-Module | 100 |
| Insulated centre part | |
| – for three-part guide rails | 157 |
| Insulating strip (G) | 145 |
| Injector/extractor handles | 168 |

K

| | Page |
|-------------------------|------|
| Keyable guide rails | |
| – Aluminium, three-part | 157 |
| – for I/O assemblies | 156 |
| – Plastic | 154 |
| – with ½HP offset | |
| Keyboards lid | |
| – for HeiCase | 119 |
| Keys | 159 |
| Keying tool | 160 |

L

| | Page |
|---|------|
| LED display and controller module (CMC & RS232) | 256 |
| LED display module | 257 |

M

| | Page |
|---|------|
| Mains switch CPCI/VME | 257 |
| Mezzanine front panels | 181 |
| MicroTCA | |
| – CubeTCA | 224 |
| – Development systems/ rack-mount systems | 222 |
| – PicoTCA | 223 |
| – Accessories | 225 |
| Micro switch for "live insertion" | 171 |
| Micro switch with cable & connector | 171 |
| Micro switch mounting clip | 172 |
| Modular syst. AT/ATX Vario Economy | 211 |
| Monitoring | |
| – MPS | 255 |
| Mounting brackets | |
| – for HeiCase | 116 |
| Mounting base for power supplies | 201 |
| Mounting blocks | 148 |
| Mounting clip | 148 |
| – for plastic covers | 172 |
| Mounting plate | |
| – for Ripac Vario-Module | 108 |
| MPS Monitoring | 255 |

P

| | Page |
|------------------------------|------|
| PCB holder | |
| – for front panels | 177 |
| – for box type plug-in units | 183 |
| PCB holder kit | 177 |
| PCB ejector / retainer | 160 |
| PicoTCA | 223 |
| Power Module Ri-PM | 225 |
| Power supply units | 196 |
| Power supply boards | 240 |
| Plastic covers for PCBs | 172 |
| Punched strip | 145 |

R

| | Page |
|---|------|
| Rack-mount system | |
| – for CPCI | 230 |
| – for industrial PCs | 206 |
| – for industrial PCs, accessories | 214 |
| – for VME/VME64x | 244 |
| – MicroTCA | 222 |
| – PicoTCA | 223 |
| Rails, horizontal | 132 |
| – for HeiPac EASY | 142 |
| Rear door | |
| – for fan installation, for HeiCase | 121 |
| – Vertically hinged, for HeiCase | 121 |
| Rear feet | |
| – for HeiPac Vario-Module | 109 |
| Rear panels | |
| – for fan installation | 188 |
| – for fan installation, horizontal hinged | 189 |
| – screw-fastened for HeiCase | 121 |
| – for AT/ATX Economy | 216 |

LIST OF TECHNICAL TERMS

S

| | Page |
|-------------------------------|------|
| Slide rails | |
| – for HeiCase | 116 |
| Side panels | |
| – for subracks | 126 |
| – for HeiPac EASY | 127 |
| Side panels and flanges | 128 |
| Slim-Box Vario | 230 |
| Slotted rear panels | 217 |
| Spacers | |
| – for HeiCase | 117 |
| Subracks accessories | |
| – for subracks | 126 |
| – for CPCI- and VME-systeme | 257 |
| – for Industrial PCs | |
| Support spacers | |
| – for mezzanine cards | 181 |
| Support stand/carrying handle | |
| – for HeiPac Vario-Module | 111 |
| Subracks | 28 |
| – Individual components | 126 |
| – EMC installation | 146 |
| – Climate control | 186 |
| – HeiPac Vario COMPACT | 66 |
| – HeiPac EASY | 82 |
| – HeiPac Vario HEAVY | 76 |
| – HeiPac Vario | 30 |
| – HeiPac Vario EMC | 30 |
| – Accessories | 125 |
| Mounting kits | 150 |
| System enclosures | |
| – HeiBox | 96 |
| – HeiCase | 112 |
| – HeiPac Vario-Module | 100 |

T

| | Page |
|-------------------------------|------|
| Telescopic slides | 214 |
| Temperatur- module | 256 |
| Temperature sensor | |
| – For DC-fan | 192 |
| Threaded inserts | |
| – for HeiCase | 116 |
| – Threaded inserts (I) | 144 |
| Tower-feet for HeiCase | 120 |
| Trim frame | |
| – vented | 151 |
| – for horizontal mounting kit | 151 |
| Trim section | |
| – for HeiCase | 118 |
| – rear, for HeiPac | 57 |

U

| | Page |
|---|------|
| U-channel front panels | |
| – for handles type I, II, IV, IVs, or VII | 167 |
| – for handles type V and VI | 176 |
| – With extractor type I, II or injector / extractor type IV | 166 |
| Universal holder | |
| – for front panel support | 174 |
| Unused slot cover | 214 |

V

| | Page |
|--|------|
| Vario, HeiPac | 30 |
| Vario, HeiPac EMV | 30 |
| Vario-Modulea, HeiPac | 100 |
| Vertical divider kit | 150 |
| Vertical support | 150 |
| VME J1 system bus | 254 |
| VME J2 expansion bus | 254 |
| VMEbus | |
| – Backplanes | 252 |
| – Backplanes, technical specifications | 250 |
| – Rack-mount systems | 244 |
| – MPS Monitoring | 255 |
| – Accessories | 257 |

Z

| | Page |
|----------------------|------|
| Z rail for connector | 144 |

WEITERE INFORMTIONEN UNTER
WWW.HEITEC.DE

A blurred photograph of a modern office hallway with large windows on the right and a drop ceiling. Several business professionals in business attire are walking through the hallway, their figures out of focus to convey a sense of motion and activity.

WE MEET YOUR INDIVIDUAL NEEDS!

You are looking for a product in the field of electronic packaging that is not in our catalogue?

Please contact us!

We will gladly submit a tailored quotation.

Phone: 09126 - 29 34 0

E-Mail: eps-quote@heitec.de

HEITEC – WE CREATE YOUR ELECTRONIC WORLD



See our website for contact details of our sales partners.

HEITEC AG

Dr.-Otto-Leich-Straße 16
90542 Eckental

Phone: +49 9126 2934 0

Fax: +49 9126 2934 199

E-Mail: electronics@heitec.de

Internet: www.heitec-eps.com