


## Bolt-type screw terminals WFF 70

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

### Product image

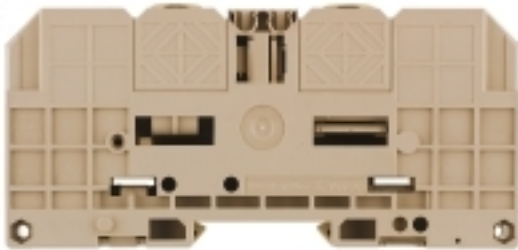

### Klippon® Connect with stud Technology

Our stud terminals are an established, robust connection alternative for particularly harsh environments. The extensive accessories and quality workmanship ensure high productivity in planning and installation – and sustainable safety in operation..

### General ordering data

Type	WFF 70
Order No.	<a href="#">1028400000</a>
Version	Bolt-type screw terminals, Feed-through terminal, Rated cross-section: 70 mm <sup>2</sup> , Threaded stud connection
GTIN (EAN)	4008190083311
Qty.	10 pc(s).

**Bolt-type screw terminals**  
**WFF 70**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

Width	31.8 mm	Width (inches)	1.252 inch
Height	132 mm	Height (inches)	5.197 inch
Depth	61 mm	Depth (inches)	2.402 inch
Depth including DIN rail	69.5 mm	Weight	176.5 g
Net weight	158.5 g		

**Temperatures**

Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity	Storage temperature, max.	40 °C
Storage temperature, min.	10 °C	Storage temperature	10 °C...40 °C
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

**Material data**

Material	Wemid	Colour	dark beige
UL 94 flammability rating	V-0		

**Rating data IECEx/ATEX**

Certificate No. (ATEX)	KEMA98ATEX1684U	Certificate No. (IECEX)	IECEXKEM07.0053U
Max. voltage (ATEX)	1100 V	Current (ATEX)	167 A
Wire cross section max. (ATEX)	70 mm <sup>2</sup>	Max. voltage (IECEX)	1100 V
Current (IECEX)	167 A	Wire cross section max. (IECEX)	70 mm <sup>2</sup>
Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity	Marking EN 60079-7	Ex eb II C Gb
Ex 2014/34/EU label	II 2 G D		

**System specifications**

Tightening torque (clamping screw for copper conductors)	6...12 Nm	End cover plate required	No
Number of levels	1	No. of clamping points per level	2
Levels cross-connected internally	No	PE connection	No
Rail	TS 35		

**Additional technical data**

Explosion-tested version	Yes	Number of similar terminals	1
Open sides	closed	Type of mounting	Snap-on

**CSA rating data**

Certificate No. (CSA)	200039-1244019	Current size C (CSA)	170 A
Voltage size C (CSA)	600 V	Wire cross section max. (CSA)	00 AWG
Wire cross section min. (CSA)	14 AWG		

**Bolt-type screw terminals**  
**WFF 70**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Conductors for clamping (rated connection)**

2 x cable lugs DIN 46 234	2.5...70 mm <sup>2</sup>	2 x cable lugs DIN 46 235	16...70 mm <sup>2</sup>
Cable lug to DIN 46234	2.5...95 mm <sup>2</sup>	Cable lug to DIN 46235	16...70 mm <sup>2</sup>
Clamping range, max.	95 mm <sup>2</sup>	Clamping range, min.	2.5 mm <sup>2</sup>
Number of connections	2	Stud size for spade connection	M 8
Tightening torque, max.	12 Nm	Tightening torque, min.	6 Nm
Type of connection	Threaded stud connection		

**Rating data**

Rated cross-section	70 mm <sup>2</sup>	Rated voltage	1,000 V
Rated current	192 A	Current at maximum wires	232 A
Volume resistance according to IEC 60947-7-x	0.17 mΩ	Rated impulse withstand voltage	8 kV
Pollution severity	3		

**Stud connection**

2 x cable lugs DIN 46 234	2.5...70 mm <sup>2</sup>	2 x cable lugs DIN 46 235	16...70 mm <sup>2</sup>
Cable lug to DIN 46234	2.5...95 mm <sup>2</sup>	Cable lug to DIN 46235	16...70 mm <sup>2</sup>
Stud size for spade connection	M 8	Tightening torque, max.	12 Nm
Tightening torque, min.	6 Nm		

**UL rating data**

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	00 AWG
Conductor size Factory wiring min. (UR)	14 AWG	Conductor size Field wiring max. (UR)	00 AWG
Conductor size Field wiring min. (UR)	14 AWG	Current size C (UR)	175 A
Voltage size C (UR)	1000 V		

**Classifications**

ETIM 3.0	EC002020	ETIM 4.0	EC002020
ETIM 5.0	EC002020	ETIM 6.0	EC000897
UNSPSC	30-21-18-01	eClass 6.2	27-14-11-20
eClass 7.1	27-14-11-20	eClass 8.1	27-14-11-20
eClass 9.0	27-14-11-20	eClass 9.1	27-14-11-20

**Approvals**

Approvals



ROHS

Conform

**Bolt-type screw terminals  
WFF 70**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data****Downloads**

Approval/Certificate/Document of Conformity	<a href="#">Attestation of Conformity</a> <a href="#">IECEX Certificate</a> <a href="#">IECEX Certificate</a> <a href="#">IECEX Certificate</a> <a href="#">IECEX Certificate</a> <a href="#">ATEX Certificate</a> <a href="#">DE_PT1004_20160418_876_ISSUE01.pdf</a>
Brochure/Catalogue	<a href="#">CAT 1 TERM 16/17 EN</a>
Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>
Engineering Data	<a href="#">STEP</a>
User Documentation	<a href="#">Cross Connection Guide</a> <a href="#">StorageConditionsTerminalBlocks</a>

**Safety note**

Safety notice	<a href="#">Safety Information</a>
---------------	------------------------------------