

## HSS-HF 3/16 2.8-4.2/25Y

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

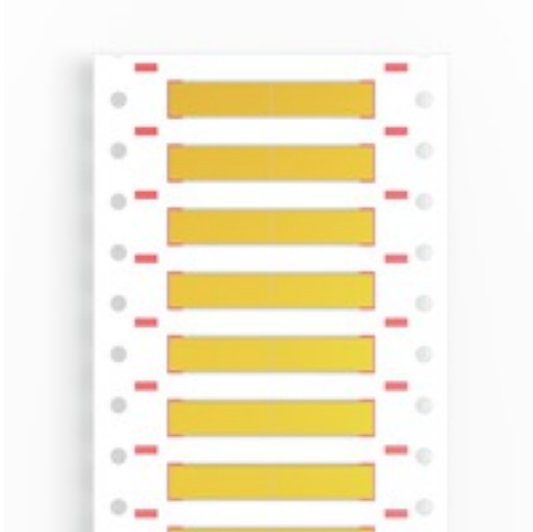

The heat-shrinkable TwinMark sleeve is printable on 2 sides and can be used for marking and insulating conductors and cables between 1.2 and 24 mm in diameter. The flexible, heat-shrink material enables a firm, perfect fit around the conductor and therefore saves space.

### Advantages:

- Application in extremely confined spaces
- Printing on 2 sides for better legibility
- Printed sleeves on a continuous backing
- Can be shrunk with conventional hot-air guns

TwinMark HSS-HF, halogen-free variant

Delivered form: reel

### General ordering data

Type	HSS-HF 3/16 2.8-4.2/25Y
Order No.	<a href="#">1961980000</a>
Version	Conductor and cable markers, 2.8 - 4.2 mm, 25.4 x 8.4 mm
GTIN (EAN)	4032248642670
Qty.	8,000 pc(s).
compatible printer	<a href="#">2430920000</a> <a href="#">2448870000</a> <a href="#">1140490000</a>

## HSS-HF 3/16 2.8-4.2/25Y

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

## Technical data

### Dimensions and weights

Width	8.4 mm	Width (inches)	0.331 inch
Height	25.4 mm	Height (inches)	1 inch
Depth	0.77 mm	Depth (inches)	0.03 inch
Net weight	0.355 g		

### General data

Material	Polyolefine	Material colour according to resistance code	4
Operating temperature range	-55...105 °C	Recommended industries	Transportation
Type of printing	blank	Width	8.4 mm

### Conductor and cable markers

Conductor O.D.	2.8 - 4.2 mm	Conductor O.D., max.	4.2 mm
Conductor O.D., min.	2.8 mm	Conductor cross-section, max.	4 mm <sup>2</sup>
Conductor cross-section, min.	1.5 mm <sup>2</sup>	Halogen	No
Rate of shrinkage	2:1	Recommended shrinking temperature	90 °C

### Classifications

ETIM 3.0	EC001530	ETIM 4.0	EC001288
ETIM 5.0	EC001288	ETIM 6.0	EC001530
UNSPSC	30-21-18-01	eClass 5.1	27-14-91-29
eClass 6.2	27-40-04-01	eClass 7.1	27-14-91-29
eClass 8.1	27-14-91-03	eClass 9.0	27-14-07-08
eClass 9.1	27-40-04-01		

### Approvals

ROHS	Conform
------	---------

### Downloads

Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>
Software	<a href="#">M-Print PRO configuration file</a>

**HSS-HF 3/16 2.8-4.2/25Y**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

