

ACT20P
ACT20P-CML-10-AO-RC-S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Product image



ACT20P: The flexible solution

- Precise and highly functional signal converters
- Release levers simplify handling

General ordering data

Type	ACT20P-CML-10-AO-RC-S
Order No.	2044850000
Version	Current-measuring transducer, Limit value monitoring, Signal converter/isolator, Current monitoring, Analogue output, Screw connection, Input measurement range: configurable, 0... 1/5/10 A AC (RMS) or DC
GTIN (EAN)	4050118409680
Qty.	1 pc(s).

ACT20P
ACT20P-CML-10-AO-RC-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Width	17.5 mm	Width (inches)	0.689 inch
Height	119.2 mm	Height (inches)	4.693 inch
Depth	113.6 mm	Depth (inches)	4.472 inch
Net weight	141 g		

Temperatures

Humidity	5...95 %, no condensation	Operating temperature, max.	60 °C
Operating temperature, min.	-25 °C	Storage temperature, max.	85 °C
Storage temperature, min.	-40 °C	Operating temperature	-25 °C...60 °C
Ambient temperature	-25 °C...+70 °C	Storage temperature	-40 °C...85 °C

Probability of failure

MTTF	130 Years
------	-----------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Input

Number of inputs	1	Input signal	Power cable can be connected to the terminals
Input measurement range	configurable, 0...1/5/10 A AC (RMS) or DC	Input frequency	AC: 15...400 Hz (true root mean square), AC: 50 Hz (arithmetic average)

General data

Accuracy	$\leq \pm 0.3 \% @ 1 \text{ A} / 5 \text{ A}, \leq \pm 0.6 \% @ 10 \text{ A}$	Configuration	DIP switch and potentiometer
Galvanic isolation	4-way isolator, between input/output/supply/relay	Power consumption, max.	2.2 W
Rail	TS 35	Step response time	$\leq 300 \text{ ms (RMS)}, \leq 60 \text{ ms (AA)}$
Temperature coefficient	$\leq \pm 100 \text{ ppm/K @ } -25 \dots +55 \text{ °C}, \leq \pm 200 \text{ ppm/K @ } +55 \dots +70 \text{ °C}$	Voltage supply	16,8 V...31,2 V

Insulation coordination

EMC standards	IEC 61326-1, IEC 61010-2-201	Galvanic isolation	4-way isolator, between input/output/supply/relay
Impulse withstand voltage	6 kV (1.2/50 μs)	Insulation voltage	4 kV _{eff} / 1 min.
Pollution severity	2	Rated voltage	300 V AC _{rms}
Surge voltage category	III		

ACT20P
ACT20P-CML-10-AO-RC-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Output (analogue)

Load resistance current	≤ 600 Ω	Load resistance voltage	≥ 10 kΩ
Output current	Adjustable, 0...20 mA, 4...20 mA, -20...+20 mA	Output voltage	Adjustable, 0...10 V, 2...10 V, 0...5 V, 1...5 V, -5...+5 V, -10...+10 V
Type (analogue output)	Voltage and current output (configurable)		

Output (digital)

Alarm function	Surge current, Under-current, Alarm delay: 0...10 s	Number of digital outputs	1
Type	Relay, 1 CO contact, normal / inverse adjustment	Max. switching voltage, DC	24 V
Max. switching voltage, AC	250 V	Rated switching current	2 A

Connection data

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	1.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 12

Ratings IECEx/ATEX/cUL

Certificate no. (cULus)	E141197
-------------------------	---------

Classifications

ETIM 6.0	EC002475	ETIM 7.0	EC002475
eClass 9.0	27-21-01-23	eClass 9.1	27-21-01-23
eClass 10.0	27-21-01-23		

Product information

Product information	<p>The device ACT20P-CML-10-AO-RC-S measures and monitors AC and DC currents of up to 10 A. The real effective value method used allows for precise measurement, even for distorted current curve shapes. The device features an integrated limit value monitoring function with an adjustable switching threshold, lag and hysteresis, as well as a relay output.</p> <p>Features</p> <ul style="list-style-type: none"> • Real effective value measurement (True RMS) or arithmetic averaging (AA) measurement • Limit value monitoring for overcurrent or undercurrent • Relay output by means of the open-circuit / closed-circuit principle • Adjustable trigger delay for filtering current peaks • Operational status and error display on a front panel LED and output signalling according to NE43, NE44, NE107 • Galvanic four-way insulation for secure isolation according to IEC/EN 61010-2-201
---------------------	--

Data sheet

ACT20P
ACT20P-CML-10-AO-RC-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	DNV GL certification Declaration of Conformity
Engineering Data	EPLAN
Engineering Data	STEP
Software	DIP switch configuration tool
User Documentation	Instruction sheet


Data sheet

ACT20P
ACT20P-CML-10-AO-RC-S





Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

Dimensioned drawing

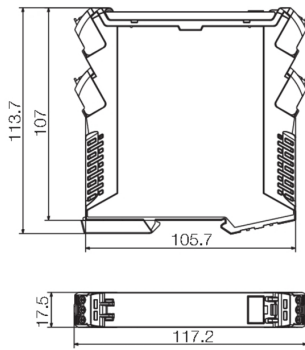

Connection diagram

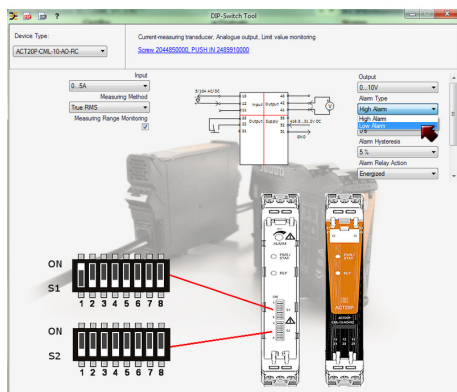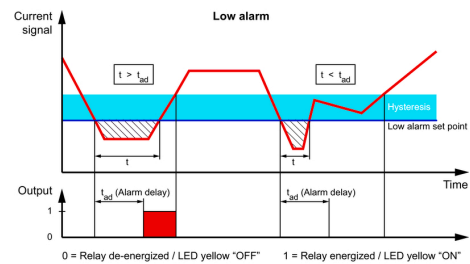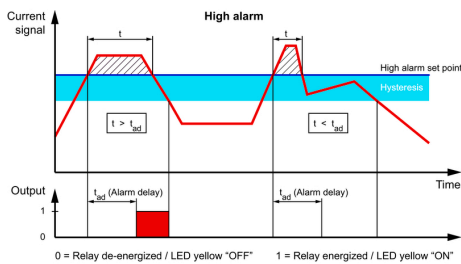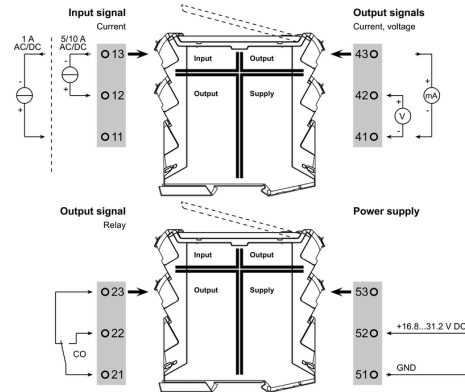

Configuration

		DIP switch S1								DIP switch S2								
		1	2	3	4	5	6	7	8	1	2	3	4	5	6	7	8	
Current input range	0...1 A									0...10 V								
	0...5 A									2...10 V								
	0...10 A									0...5 V								
Measuring method	True RMS									1...5 V								
	Arithmetic average									-5...+5 V								
Alarm delay time	0 s									-10...+10 V								
	2 s									0...20 mA								
	5 s									4...20 mA								
	10 s									-20...+20 mA								
Measuring range monitoring	Yes									Alarm relay action	1	2	3	4	5	6	7	8
	No									Energized								
Output error action	Upscale									De-energized								
	Downscale									Alarm hysteresis	1	2	3	4	5	6	7	8
Transfer function	Normal									5%								
	Inverse									10%								
Alarm type	High alarm									Alarm type	1	2	3	4	5	6	7	8
	Low alarm									High alarm								
										Low alarm								

example for DIP switch setting (with ACT20 tool)

**ACT20P
ACT20P-CML-10-AO-RC-S**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories
markers


The new standard for integrating innovative electronics on the DIN rail.

Trend-setting flexibility and design freedom.

Flexibility, efficiency, functionality and security.

CH20M (Component Housing IP20 Modular) –

Weidmüller's new housing standard fits perfectly with customised electronics applications. This "standard tailor-made fit" combines the design freedom made possible by a pioneering concept of modularity with the minimized overhead and optimised planning security of a standard system.

From development to production, the CH20M represents efficiency. It covers all of the requirements for a modern electronics platform built with the future in mind. The system has several outstanding features, including its scalability, flexibility, high security level and innovative application functionality. Overall, the product line covers all common pitches, from the 6.1-mm sliced design to the 22.5-mm and 67-mm large-scale housings.

The application-centred design was developed from real world experience for the real world. It is designed with the market, the application and the future in mind. The essential features speak for themselves:

- Systematic modularity- from head (plate) to (clip-on) foot
- Excellent scalability – 7 different widths, from 6.1 - 67.5 mm!
- Maximized security: with leading-pin contact and captive coding system
- Unlimited continuity - a unified design for all pitch widths
- Very compact size – up to 4 connection levels and with release lever
- Complete process security - SMT/THR connection components packaged in Tape-on-Reel and an optimised PCB design
- Maximized efficiency - with the optimised use of PCB surface space

CH20M - offering the best performance with the least effort. A quantum leap for your application!

General ordering data

Type	ESG 8/13.5/43.3 SAI AU	Version
Order No.	1912130000	ESG, Device markers x 13.5 mm, PA 66, Colour: Transparent
GTIN (EAN)	4032248541164	
Qty.	5 pc(s).	

Data sheet**ACT20P
ACT20P-CML-10-AO-RC-S**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories

Type	ESG 6.6/15 BHZ 5.00/03	Version
Order No.	1082520000	ESG, Device markers x 15 mm, PA 66, Colour: white
GTIN (EAN)	4032248845323	
Qty.	200 pc(s).	