

SAIL-M12BG-5-5.0U

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

Our developers have focused specifically on this issue and designed a host of different M8 and M12 sensor-actuator cables so you are bound to find the solution you need for your application.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

General ordering data

| | |
|------------|---|
| Type | SAIL-M12BG-5-5.0U |
| Order No. | 9457910500 |
| Version | Sensor/actuator line, One end without connector, M12, Number of poles : 5, 5 m, Female socket, straight, Shielded: No, LED: No, Sheath material: PUR, Halogen: No |
| GTIN (EAN) | 4032248228850 |
| Qty. | 1 pc(s). |

SAIL-M12BG-5-5.0U**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data**Dimensions and weights**

Net weight 193 g

Temperatures

Operating temperature, max. 80 °C Operating temperature, min. -25 °C

Environmental Product Compliance

REACH SVHC Lead 7439-92-1

Technical specifications for cable

| | | | |
|----------------------------------|--------------------|------------------------------|---------------------------------|
| Number of poles | 5 | Core cross-section | 0.34 mm ² |
| Outside diameter | 5 ± 0.2 mm | Shielded | No |
| Insulation | PP | Colour coding | brown, white, blue, black, grey |
| Sheath material | PUR | Sheathing colour | Black |
| Cable length | 5 m | Temperature range, moving | -25...80 °C |
| Temperature range, stationary | -40...80 °C | Halogen | No |
| Suitable for cable carriers | Yes | Torsion resistance | 0 °/m |
| Bending radius, min., stationary | 5 x cable diameter | Bending radius, min., moving | 10 x cable diameter |
| Acceleration | 5 m/s ² | Speed | 5 m/s |
| Bending cycles | 5 Mio | Resistant to welding beads | No |

General technical data

| | | | |
|-----------------------|-------------------------|------------------------------|---|
| Version | Female socket, straight | connection thread | M12 |
| Housing main material | PUR | Threaded ring material | Brass, nickel-plated |
| Coding | A | Protection degree | IP65, IP66, IP67, IP68, when screwed in |
| Contact surface | Gold-plated | LED | No |
| Rated voltage | 125 V | Rated current | 4 A |
| Insulation resistance | 10 ⁸ Ω | Temperature range of housing | -25...+85 °C |
| Tightening torque | M12: 0.8 - 1.2 Nm | Plugging cycles | ≥ 100 |
| Pollution severity | 3 | jumpered | No |

Standards

Connector standard IEC 61076-2-101 Certificate no. (cULus) E307231

Classifications

| | | | |
|------------|-------------|------------|-------------|
| ETIM 3.0 | EC001855 | ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 | ETIM 6.0 | EC001855 |
| UNSPSC | 26-12-16-13 | eClass 5.1 | 27-06-91-90 |
| eClass 6.2 | 27-27-92-18 | eClass 7.1 | 27-06-91-90 |
| eClass 8.1 | 27-06-91-90 | eClass 9.0 | 27-06-91-90 |
| eClass 9.1 | 27-06-03-11 | | |

Product information

Descriptive text ordering data Other versions on request
 Descriptive text technical data Chapter W includes additional technical specifications for the cable

Data sheet**SAIL-M12BG-5-5.0U**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data**Approvals**

Approvals



ROHS

Conform

Downloads

Brochure/Catalogue

[CAT 8 SAI 15/16 EN](#)
[FL FIELDWIRING EN](#)

Engineering Data

[EPLAN, WSCAD, Zuken E3.S](#)


Data sheet

SAIL-M12BG-5-5.0U


Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings


Dimensioned drawing

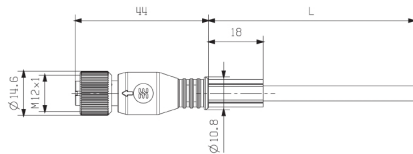

Pole scheme

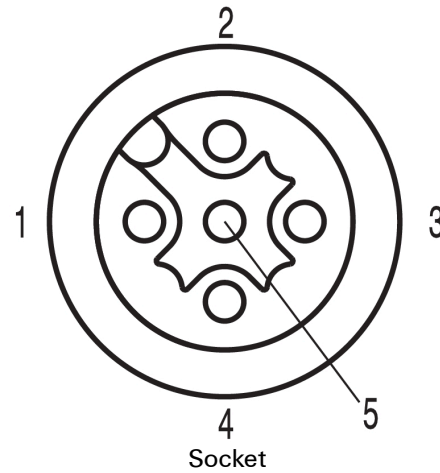

Wiring diagram



The ideal tool, the Screwty® with torque function



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F