



M12 FEMALE


FACE VIEWS




PIN	WIRE COLOR
1	BROWN
2	-
3	BLUE
4	BLACK



PIN	WIRE COLOR
1	BROWN
2	WHITE
3	BLUE
4	BLACK




PIN	WIRE COLOR
1	BROWN
2	WHITE
3	BLUE
4	BLACK
5	GY or GN-YE




PIN	WIRE COLOR
1	WHITE
2	BROWN
3	GREEN
4	YELLOW
5	GREY
6	PINK
7	BLUE
8	RED


FEMALE STRAIGHT - MALE STRAIGHT 88X030BXXMXXX




FEMALE RIGHT ANGEL - MALE STRAIGHT 88X031BXXMXXX

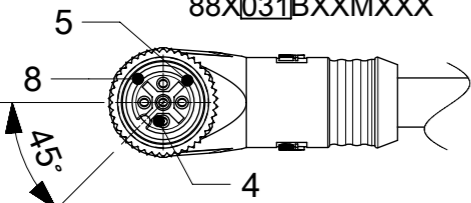

FEMALE STRAIGHT - MALE RIGHT ANGEL 88X032BXXMXXX




FEMALE RIGHT ANGLE - MALE RIGHT ANGLE 88X033BXXMXXX

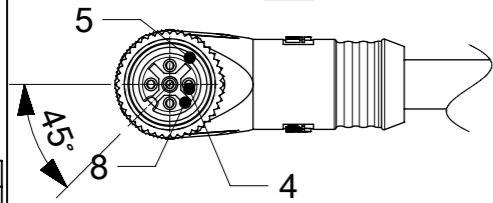

VIEW FROM THE FRONT SIDE
FEMALE 5P

L + TOL. - SEE MATRIX
(SHEET 2)

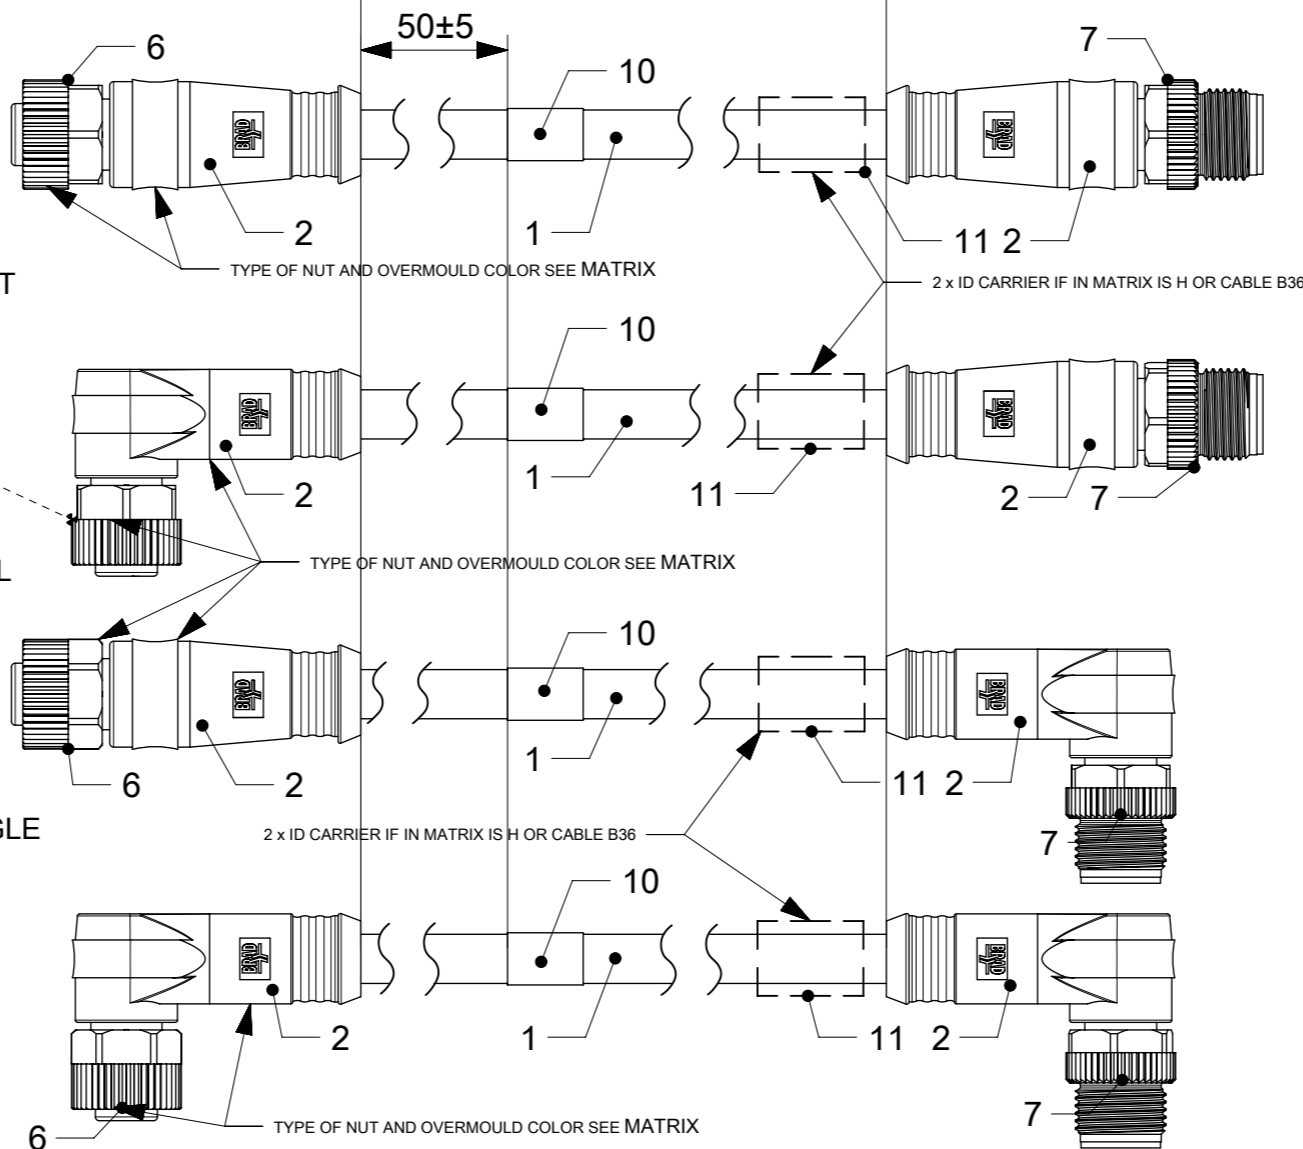


M12 MALE


FACE VIEWS




PIN	WIRE COLOR
1	BROWN
2	-
3	BLUE
4	BLACK





PIN	WIRE COLOR
1	BROWN
2	WHITE
3	BLUE
4	BLACK



PIN	WIRE COLOR
1	BROWN
2	WHITE
3	BLUE
4	BLACK
5	GY or GN-YE



PIN	WIRE COLOR
1	WHITE
2	BROWN
3	GREEN
4	YELLOW
5	GREY
6	PINK
7	BLUE
8	RED

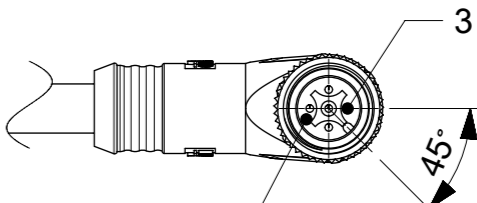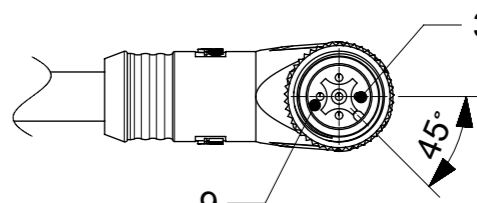

VIEW FROM THE FRONT SIDE
MALE 5P

BILL OF MATERIALS

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
11	X	ID CARRIER (SEE MATRIX)	PVC	-
10	1	STANDARD WRAP LABEL YE	VINYL	-
9	1	INSERT M12 MA XP BK	ELASTOLLAN	-
8	1	INSERT M12 FE XP BK	ELASTOLLAN	-
7	1	NUT M12 MA HEX	BRASS	NICKEL PLATED
6	1	NUT M12 FE HEX	BRASS	NICKEL PLATED
5	1	GASKET RD	FPM	-
4	X	CONTACT FEMALE	BRONZE	GOLD OVER NICKEL PLATED
3	X	CONTACT MALE	CuNi2Si	GOLD OVER NICKEL PLATED
2	-	MOULDING MATERIAL	TPU	-
1	-	CABLE (SEE MATRIX)	-	-

RELEASE STATUS P1 RELEASE DATE 22.08.2016 11:01:26


NOTE:

1. BRAD LOGO - ONLY IN ONE SIDE ON THE OVERMOULD.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

2016/06/23 2016/08/22	2016/06/23 2016/08/22	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION UNITS	SCALE		
		ANGULAR TOL ±	MM	1:1		
		4 PLACES ±	DRWN BY	DATE		
		3 PLACES ±	MMATLA	2016/06/23		
2 PLACES ±	CHK'D BY	DATE	CSE M12 XP AC FE XXX TPU MA XXX XM DE			
1 PLACE ±	APPR BY	DATE				
0 PLACES ±	MIWASIECZKO	2016/08/22	PRODUCT CUSTOMER DRAWING			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE	THIRD ANGLE PROJECTION	SERIES	MATERIAL NUMBER	CUSTOMER
A3		A3		120065	SEE MATRIX (SH 2)	
A		DOCUMENT NUMBER		DOC TYPE	DOC PART	SHEET NUMBER
REV		1200659548		PSD	00P	1 OF 4

PART No MATRIX - NUMERICAL CODE (AVAILABLE PARTS SEE PART LIST TABLE. OTHERS PARTS AVAILABLE UPON REQUEST).

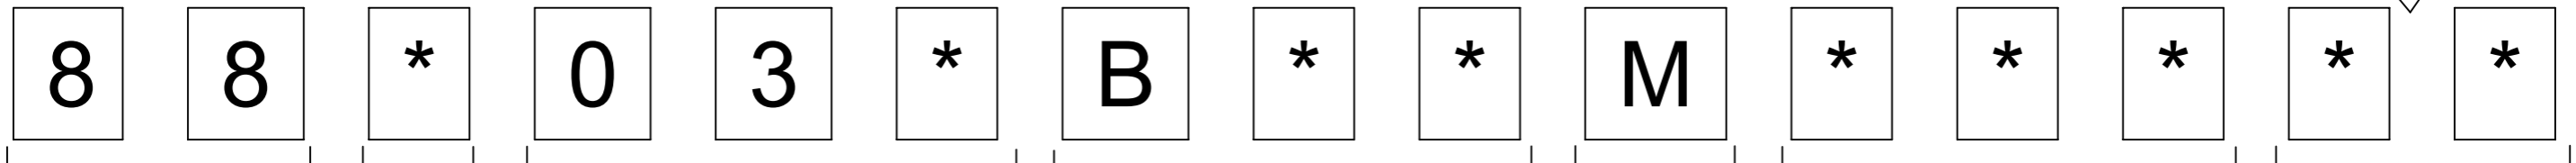

88 = M12x2

POLES:
 3 = 3 POLES
 4 = 4 POLES
 5 = 5POLES
 8 = POLES

HEADER:
 030 = FEMALE STRAIGHT / MALE STRAIGHT
 031 = FEMALE RIGHT ANGEL / MALE STRAIGHT
 032 = FEMALE STRAIGHT/ MALE RIGHT ANGEL
 033 = FEMALE RIGHT ANGLE / MALE RIGHT ANGLE

CABLE:
 B30 = 0.34mm², TPU BLACK
 B33 = 0.34mm², TPU GREY
 B36 = 0.34mm², TPU ORANGE
 B41 = 0.25mm², TPU BLACK
 B42 = 0.34mm², TPU BLACK
 B49 = 0.25mm², TPU ORANGE

UNITS:
 M = METER
 C = CENTIMETER
 T = 10 x METER

LENGTH:
 EXAMPLES:
 010 = 1 UNITS
 050 = 5 UNITS
 150 = 15 UNITS

H = 2 SZT. I/D CARRIER
COUPLIN NUT:
 BLANK = KNU / HEX
 7 = TEFLON KNU
 5 = PLASTIC NYLON
OVERMOULDED:
 BLANK = BLACK
 A = GREY
 G = BLACK
 Y = YELLOW

88X030B33MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGTH [mm]
1200669223	884030B33M010	1000
1200669224	884030B33M020	2000
1200669225	884030B33M030	3000
1200669226	884030B33M050	5000
1200669247	885030B33M020	2000
1200669248	885030B33M100	10000
1200669249	885030B33M200	20000
1200669250	884030B33M005	500
1200669251	884030B33M100	10000
1200669252	884030B33M200	20000
1200669253	885030B33M030	3000
1200669254	885030B33M050	5000
1200669255	885030B33M300	30000
1200669256	884030B33M300	30000
1200669257	885030B33M005	500
1200669258	885030B33M010	1000

88X030B41MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGTH [mm]
1200668870	888030B41M038	3800
1200668895	888030B41M006	600
1200668896	888030B41M010	1000
1200668897	888030B41M020	2000
1200668898	888030B41M030	3000
1200668899	888030B41M050	5000
1200668900	888030B41M100	10000
1200669177	888030B41M090	9000

88X030B42MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGTH [mm]
1200659548	885030B42M150	15000
1200659549	885030B42M200	20000
1200668823	885030B42M006	600
1200668824	885030B42M010	1000
1200668825	885030B42M020	2000
1200668826	885030B42M030	3000
1200668827	885030B42M050	5000
1200668828	885030B42M100	10000

88X030B49MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGHT [mm]
1200669017	888030B49M015Y	1500
1200669112	888030B49M038Y	3800

TABLE OF LENGTH TOLERANCES		
OVER	UP TO AND INCLUDING	TOLERANCE
0	1000	+40 0
1000	5000	+60 0
5000	10000	+80 0
10000	20000	+140 0
20000	30000	+160 0
30000	>	+1% OF LENGTH

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC NO: 107719 DRWN: MMATLA CHK'D: MIWASIECZKO REV APPR: MIWASIECZKO	2016/06/23	2016/08/22	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION UNITS	SCALE			
			ANGULAR TOL ± °	MM	1:1			
			4 PLACES ±	DRWN BY	DATE			
			3 PLACES ±	MMATLA	2016/06/23			
		2 PLACES ±	CHK'D BY	DATE	CSE M12 XP AC FE XXX TPU MA XXX XM DE PRODUCT CUSTOMER DRAWING			
		1 PLACE ±	APPR BY	DATE				
		0 PLACES ±	MIWASIECZKO	2016/08/22				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWING SIZE	THIRD ANGLE PROJECTION	SERIES	MATERIAL NUMBER	CUSTOMER	
			A3		120065	SEE MATRIX		
					DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
					1200659548	PSD	00P	2 OF 4

88X030B30MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGTH [mm]
1200659666	885030B30M005	500
1200659667	885030B30M025	2500
1200668817	884030B30M006	600
1200668818	884030B30M010	1000
1200668819	884030B30M020	2000
1200668820	884030B30M030	3000
1200668821	884030B30M050	5000
1200668822	884030B30M100	10000
1200668863	884030B30M070	7000
1200668889	883030B30M006	600
1200668890	883030B30M010	1000
1200668891	883030B30M020	2000
1200668892	883030B30M030	3000
1200668893	883030B30M050	5000
1200668894	883030B30M100	10000
1200668913	884030B30M150	15000
1200668914	884030B30M200	20000
1200668915	884030B30M250	25000
1200668916	884030B30M300	30000
1200668991	885030B30M006	600
1200668992	885030B30M010	1000
1200668993	885030B30M020	2000
1200668994	885030B30M030	3000
1200668995	885030B30M050	5000
1200668996	885030B30M100	10000
1200669142	884030B30M0105	1000
1200669143	884030B30M0505	5000
1200669144	884030B30M025	2500
1200669145	885030B30M015	1500
1200669157	884030B30M002	200
1200669181	884030B30M040	4000
1200669182	884030B30M060	6000
1200669242	885030B30M0107	1000

88X030B36MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGTH [mm]
1200668859	884030B36M0507Y	5000
1200668860	884030B36M1007Y	10000
1200669019	884030B36M0057Y	500
1200669020	884030B36M0107Y	1000
1200669021	884030B36M0157Y	1500
1200669022	884030B36M0207Y	2000
1200669023	884030B36M0307Y	3000
1200669024	884030B36M0407Y	4000
1200669025	884030B36M0607Y	6000
1200669026	884030B36M0807Y	8000
1200669027	884030B36M1207Y	12000
1200669028	884030B36M1507Y	15000
1200669029	884030B36M2007Y	20000
1200669030	884030B36M2507Y	25000
1200669031	884030B36M3007Y	30000
1200669032	885030B36M0057Y	500
1200669033	885030B36M0107Y	1000
1200669034	885030B36M0207Y	2000
1200669035	885030B36M0307Y	3000
1200669036	885030B36M0407Y	4000
1200669037	885030B36M0507Y	5000
1200669038	885030B36M0607Y	6000
1200669039	885030B36M0807Y	8000
1200669040	885030B36M1007Y	10000
1200669041	885030B36M1207Y	12000
1200669042	885030B36M1507Y	15000
1200669043	885030B36M1807Y	18000
1200669044	885030B36M2007Y	20000
1200669045	885030B36M2507Y	25000
1200669046	885030B36M3007Y	30000
1200669140	885030B36M8507Y	85000

88X031B30MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGTH [mm]
1200668829	884031B30M006	600
1200668830	884031B30M010	1000
1200668831	884031B30M020	2000
1200668832	884031B30M030	3000
1200668833	884031B30M050	5000
1200668834	884031B30M100	10000
1200668877	883031B30M006	600
1200668878	883031B30M010	1000
1200668879	883031B30M020	2000
1200668880	883031B30M030	3000
1200668881	883031B30M050	5000
1200668882	883031B30M100	10000
1200668997	885031B30M006	600
1200668998	885031B30M010	1000
1200668999	885031B30M020	2000
1200669000	885031B30M030	3000
1200669001	885031B30M050	5000
1200669002	885031B30M100	10000
1200669241	885031B30M0067	600
1200669243	885031B30M0207	2000



88X031B41MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGTH [mm]
1200668883	888031B41M006	600
1200668884	888031B41M010	1000
1200668885	888031B41M020	2000
1200668886	888031B41M030	3000
1200668887	888031B41M050	5000
1200668888	888031B41M100	10000

88X031B42MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGTH [mm]
1200668835	885031B42M006	600
1200668836	885031B42M010	1000
1200668837	885031B42M020	2000
1200668838	885031B42M030	3000
1200668839	885031B42M050	5000
1200668840	885031B42M100	10000

88X031B36MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGTH [mm]
1200668861	884031B36M0507Y	5000
1200668862	884031B36M1007Y	10000
1200669047	884031B36M0057Y	500
1200669048	884031B36M0107Y	1000
1200669049	884031B36M0157Y	1500
1200669050	884031B36M0207Y	2000
1200669051	884031B36M0307Y	3000
1200669052	884031B36M0407Y	4000
1200669053	884031B36M0607Y	6000
1200669054	884031B36M0807Y	8000
1200669055	884031B36M1207Y	12000
1200669056	884031B36M1507Y	15000
1200669057	884031B36M2007Y	20000
1200669058	884031B36M2507Y	25000
1200669059	884031B36M3007Y	30000
1200669060	885031B36M0057Y	500
1200669061	885031B36M0107Y	1000
1200669062	885031B36M0207Y	2000
1200669063	885031B36M0307Y	3000
1200669064	885031B36M0407Y	4000
1200669065	885031B36M0507Y	5000
1200669066	885031B36M0607Y	6000
1200669067	885031B36M0807Y	8000
1200669068	885031B36M1007Y	10000
1200669069	885031B36M1207Y	12000
1200669070	885031B36M1507Y	15000
1200669071	885031B36M1807Y	18000
1200669072	885031B36M2007Y	20000
1200669073	885031B36M2507Y	25000
1200669074	885031B36M3007Y	30000

RELEASE STATUS P1 RELEASE DATE 22.08.2016 11:01:26

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

2016/06/23	2016/08/22	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE					
		ANGULAR TOL ± °		MM	1:1					
EC NO: 107719 DRWN: MMATLA CHK'D: MIWASIECZKO REVISION: 5 DATE: 2015/12/14	APP: MIWASIECZKO	4 PLACES ±	MMATLA	DRWN BY	DATE		CSE M12 XP AC FE XXX TPU MA XXX XM DE			
		3 PLACES ±		CHK'D BY	DATE					
		2 PLACES ±	MIWASIECZKO	APPR BY	DATE	PRODUCT CUSTOMER DRAWING				
		1 PLACE ±		MIWASIECZKO	2016/08/22	SERIES	MATERIAL NUMBER	CUSTOMER		
0 PLACES ±	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE	THIRD ANGLE PROJECTION	120065	SEE MATRIX (SH 2)				
A	REV			A3			DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
						1200659548	PSD	00P	3 OF 4	

88X032B30MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGTH [mm]
1200668918	883032B30M006	600
1200668919	883032B30M010	1000
1200668920	883032B30M020	2000
1200668921	883032B30M030	3000
1200668922	883032B30M050	5000
1200668923	883032B30M100	10000
1200668924	884032B30M006	600
1200668925	884032B30M010	1000
1200668926	884032B30M020	2000
1200668927	884032B30M030	3000
1200668928	884032B30M050	5000
1200668929	884032B30M100	10000
1200669003	885032B30M006	600
1200669004	885032B30M010	1000
1200669005	885032B30M020	2000
1200669006	885032B30M030	3000
1200669007	885032B30M050	5000
1200669008	885032B30M100	10000
88X032B36MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGTH [mm]
1200669075	884032B36M0057Y	500
1200669076	884032B36M0107Y	1000
1200669077	884032B36M0157Y	1500
1200669078	884032B36M0207Y	2000
1200669079	884032B36M0307Y	3000
1200669080	884032B36M0407Y	4000
1200669081	884032B36M0507Y	5000
1200669082	884032B36M0607Y	6000
1200669083	884032B36M0807Y	8000
1200669084	884032B36M1007Y	10000
1200669085	884032B36M1207Y	12000
1200669086	884032B36M1507Y	15000
1200669087	884032B36M2007Y	20000
1200669088	884032B36M2507Y	25000
1200669089	884032B36M3007Y	30000
1200669090	885032B36M0057Y	500
1200669091	885032B36M0107Y	1000
1200669092	885032B36M0207Y	2000
1200669093	885032B36M0307Y	3000
1200669094	885032B36M0407Y	4000
1200669095	885032B36M0507Y	5000
1200669096	885032B36M0607Y	6000
1200669097	885032B36M0807Y	8000
1200669098	885032B36M1007Y	10000
1200669099	885032B36M1207Y	12000
1200669100	885032B36M1507Y	15000
1200669101	885032B36M1807Y	18000
1200669102	885032B36M2007Y	20000
1200669103	885032B36M2507Y	25000
1200669104	885032B36M3007Y	30000

RELEASE STATUS	P1	RELEASE DATE	22.08.2016	11:01:26
----------------	----	--------------	------------	----------



88X032B41MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGTH [mm]
1200668936	888032B41M006	600
1200668937	888032B41M010	1000
1200668938	888032B41M020	2000
1200668939	888032B41M030	3000
1200668940	888032B41M050	5000
1200668941	888032B41M100	10000

88X032B42MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGTH [mm]
1200668930	885032B42M006	600
1200668931	885032B42M010	1000
1200668932	885032B42M020	2000
1200668933	885032B42M030	3000
1200668934	885032B42M050	5000
1200668935	885032B42M100	10000


88X033B30MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGTH [mm]
1200668942	883033B30M006	600
1200668943	883033B30M010	1000
1200668944	883033B30M020	2000
1200668945	883033B30M030	3000
1200668946	883033B30M050	5000
1200668947	883033B30M100	10000
1200668948	884033B30M006	600
1200668949	884033B30M010	1000
1200668950	884033B30M020	2000
1200668951	884033B30M030	3000
1200668952	884033B30M050	5000
1200668953	884033B30M100	10000
1200669009	885033B30M006	600
1200669010	885033B30M010	1000
1200669011	885033B30M020	2000
1200669012	885033B30M030	3000
1200669013	885033B30M050	5000
1200669014	885033B30M100	10000
1200669259	883033B30M004	400

88X033B41MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGTH [mm]
1200668960	888033B41M006	600
1200668961	888033B41M010	1000
1200668962	888033B41M020	2000
1200668963	888033B41M030	3000
1200668964	888033B41M050	5000
1200668965	888033B41M100	10000


88X033B42MXXXXX		
MOLEX PN	ENGINEERING No	CABLE LENGTH [mm]
1200668954	885033B42M006	600
1200668955	885033B42M010	1000
1200668956	885033B42M020	2000
1200668957	885033B42M030	3000
1200668958	885033B42M050	5000
1200668959	885033B42M100	10000

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
EC NO: 107719 DRWN: MMATLA CHK'D: APPR: MIWASIECZKO	2016/06/23 2016/08/22	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE						
		ANGULAR TOL ± °		MM	1:1						
		4 PLACES ±		DRWN BY	DATE						
		3 PLACES ±		MMATLA	2016/06/23	CSE M12 XP AC FE XXX TPU MA XXX XM DE					
		2 PLACES ±		CHK'D BY	DATE						
		1 PLACE ±		APPR BY	DATE						
		0 PLACES ±		MIWASIECZKO	2016/08/22	PRODUCT CUSTOMER DRAWING					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE	THIRD ANGLE PROJECTION	SERIES	MATERIAL NUMBER	CUSTOMER			
				A3		120065	SEE MATRIX (SH2)				
							DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER	
					1200659548	PSD	00P	4 OF 4			

FEMALE PLUG M12 90° ANGLED TO MALE PLUG M12 STRAIGHT

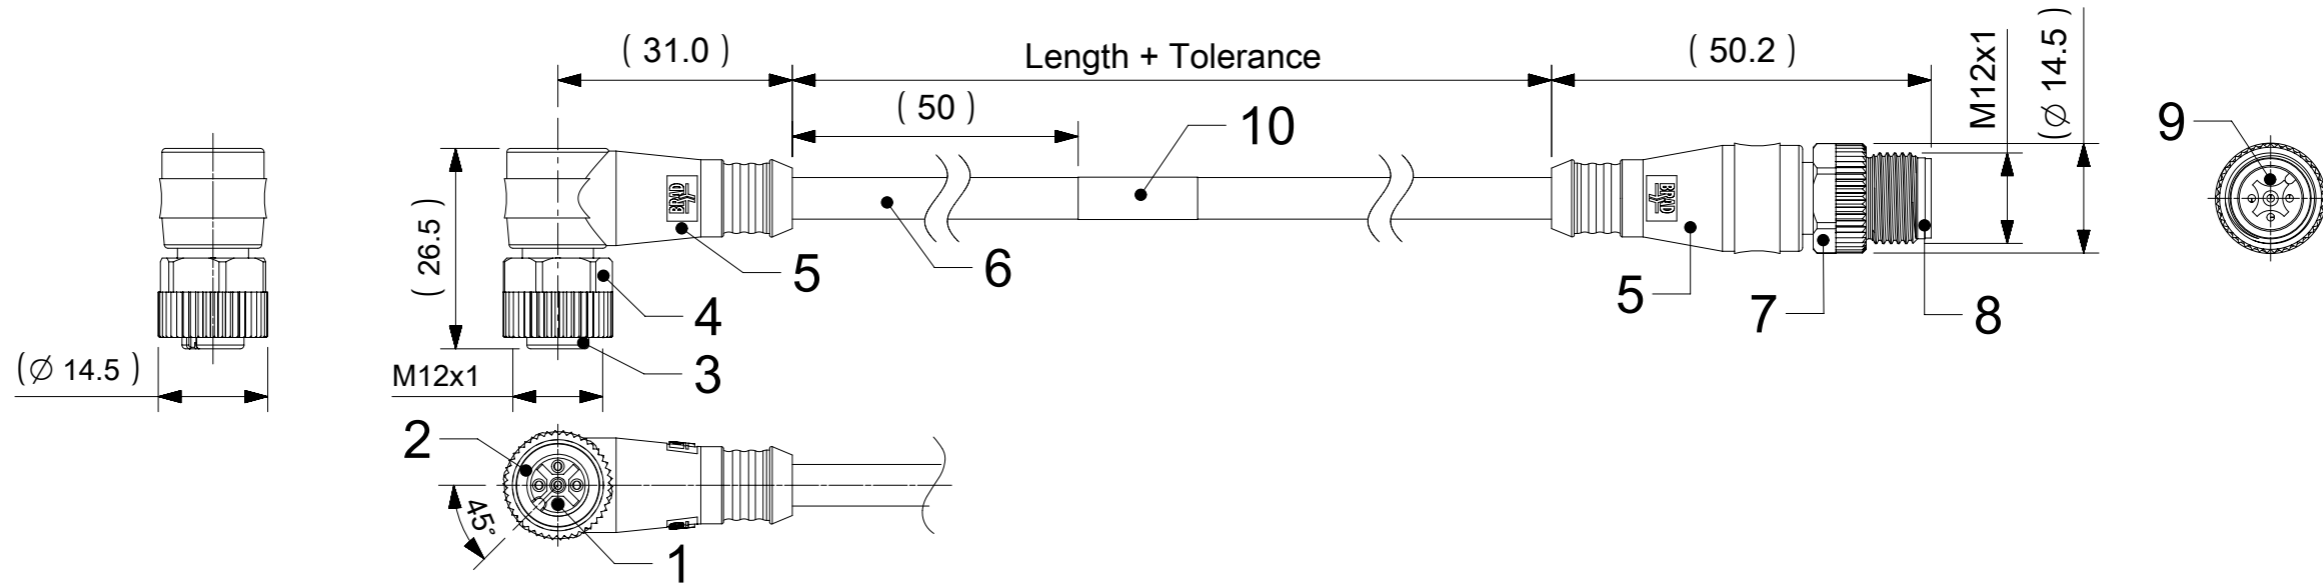

NOTES:
 CONTACT CURRENT RATING: 3-5 POLES 4A
 8 POLES 2A
 VOLTAGE RATING: 3-4 POLES 250V
 5 POLES 60V
 8 POLES 30V
 PROTECTION CLASS: IP 67
 TEMPERATURE: -25°C / +85°C

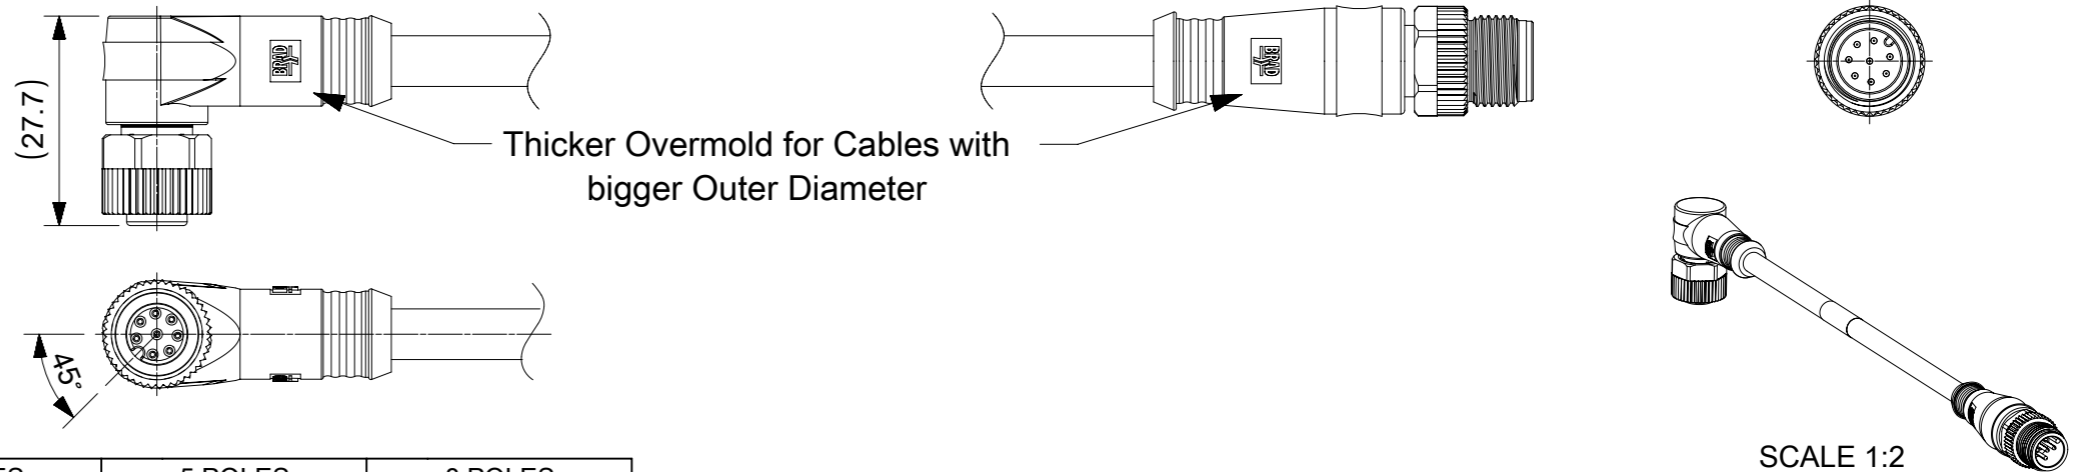

CONTACT POSITION FRONT VIEW:

	3 POLES		4 POLES		5 POLES		5 POLES		8 POLES	
CABLE	B30, B55		B30, B33, B36, B55		B30, B33, B36, B55		B42		B41, B49	
FEMALE										
MALE										
CONNECTIONS	PIN	WIRE	PIN	WIRE	PIN	WIRE	PIN	WIRE	PIN	WIRE
	1	BROWN	1	BROWN	1	BROWN	1	BROWN	1	WHITE
	2	---	2	WHITE	2	WHITE	2	WHITE	2	BROWN
	3	BLUE	3	BLUE	3	BLUE	3	BLUE	3	GREEN
	4	BLACK	4	BLACK	4	BLACK	4	BLACK	4	YELLOW
	5	---	5	---	5	GREY	5	GREEN/YELLOW	5	GREY
									6	PINK
									7	BLUE
								8	RED	

CODING REQUIRED TO IEC 61076-2-101

FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
10	1	LABEL OR PRINTING	VINYL / ---	---
9	3 / 4 / 5 / 8	CONTACT M12 MALE	BRASS	SELECTIVE GOLD OVER NICKEL
8	1	INSERT MALE BLACK	TPU	---
7	1	COUPLING NUT MALE	BRASS	NICKEL
6	-	CABLE	SEE SHEET 2	---
5	-	OVERMOULDING BLACK	TPU	---
4	1	COUPLING NUT FEMALE	BRASS	NICKEL
3	1	INSERT FEMALE BLACK	PUR	---
2	1	ORING RED	FPM	---
1	3 / 4 / 5 / 8	CONTACT M12 FEMALE	BRASS	SELECTIVE GOLD OVER NICKEL

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SYMBOLS: DIMENSION UNITS: mm SCALE: 1:1

GENERAL TOLERANCES (UNLESS SPECIFIED): ANGULAR TOL ± 1.0°

CURRENT REV DESC:

EC NO: 172344
 DRWN: SSM 2018/02/12
 CHK'D: RSILLER 2018/02/14
 APPR: RSILLER 2018/02/15

INITIAL REVISION:
 DRWN: JMARSZALEK 2016/08/12
 APPR: RSILLER 2016/08/29

molex

CSE M12 XP AC FE RA WSOR MA STR XM DE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER: 1200668999 DOC TYPE: PSD DOC PART: 000 REVISION: A2

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

THIRD ANGLE PROJECTION

DRAWING: A3-SIZE SERIES: 120066 MATERIAL NUMBER: SEE SHEET 3 CUSTOMER: GENERAL MARKET SHEET NUMBER: 1 OF 3

ENGINEERING NO. - NUMERICAL CODE (Available parts see PART LIST table. Other parts available upon request).

OPTIONS

8 8 X 0 3 1 X X X X X X X X

88=M12x1 Double ended

Poles:
3=3 Poles
4=4 Poles
5=5 Poles
8=8 Poles

Heads style:
031=Plug Female 90° to Plug Male Straight

Cable type: See Table


Units:
M=Meter
C=Centimeter
T=10x Meter

Length
Examples:
005=0.5 units
010=1 units
020=1 units
050=5 units
100=10 units
150=15 units
200=20 units

Overmold color:
Blank (Standard)=Black
A=Grey / G=Black / Y=Yellow / R=Red

Coupling Nut:
Blank (Standard)=Knurled/Hex Brass, Ni Plated
5=Knurled Derlin
7=Knurled Brass Ni Plated, Teflon Coated

H= 2 pcs. of I/D Carrier PVC Transparent
(Cables Ixx & P82 always with 2 pcs. I/D Carrier)

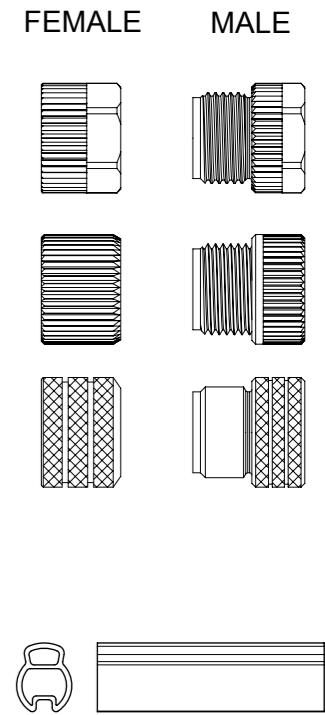

CABLE INFORMATION (for more information see Cable Data Sheet).

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	DRAG CHAIN: TEMP. / BENDING RADIUS	DRAG CHAIN	CABLE PRODUCT SPECIFICATION	CABLE SPEC. DRAWING
B30	3 / 4 / 5	0.34mm ²	TPU Black	UL 21215/758	C22.2 I/II A/B 80°/600V	-40°C to +90°C 5xO.D.	-25°C to +80°C 7.5xO.D.	-5°C to +60°C 7.5xO.D.	up to 5 000 000 cycles at temp 20°C	1552200001	SD-120209-001
B33	4 / 5	0.34mm ²	TPU Gray								SD-120209-001
B36	4 / 5	0.34mm ²	TPU Orange								SD-120209-001
B41	8	0.25mm ²	TPU Black								SD-120209-006
B42	5	0.34mm ²	TPU Black								SD-120209-001
B49	8	0.25mm ²	TPU Orange								SD-120209-006
B55	3 / 4 / 5	0.34mm ²	TPU Yellow								n/a

CABLE LENGTH TOLERANCES		
LENGTH	TOLERANCE	
shorter 1m	+40 mm	-0 mm
1m-5m	+60 mm	-0 mm
5m-10m	+80 mm	-0 mm
10m-20m	+140 mm	-0 mm
20m-30m	+160 mm	-0 mm
longer 30m	+1%	-0 mm

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	CURRENT REV DESC:		molex
	mm	SCALE 1:1	EC NO: 172344	
	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRWN: SSM 2018/02/12	
	ANGULAR TOL ± 1.0°		CHK'D: RSILLER 2018/02/14	
▽ = 0	4 PLACES ±	APPR: RSILLER 2018/02/15	PRODUCT CUSTOMER DRAWING	
▽ = 0	3 PLACES ±	INITIAL REVISION:	DOCUMENT NUMBER	
▽ = 0	2 PLACES ± 0.05	DRWN: JMARSZALEK 2016/08/12	1200668999	
▽ = 0	1 PLACE ± 0.1	APPR: RSILLER 2016/08/29	DOC TYPE DOC PART REVISION	
▽ = 0	0 PLACES ± 0.2	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	PSD 000 A2	
⊗ = 0	THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER
▽ = 0		A3-SIZE	120066	SEE SHEET 3
		CUSTOMER	SHEET NUMBER	
		GENERAL MARKET	2 OF 3	

PART LIST

Pos.	Part No.	Engineering No.	Cable Length
1	1200668829	884031B30M006	0.6m
2	1200668830	884031B30M010	1m
3	1200668831	884031B30M020	2m
4	1200668832	884031B30M030	3m
5	1200668833	884031B30M050	5m
6	1200668834	884031B30M100	10m
7	1200668835	885031B42M006	0.6m
8	1200668836	885031B42M010	1m
9	1200668837	885031B42M020	2m
10	1200668838	885031B42M030	3m
11	1200668839	885031B42M050	5m
12	1200668840	885031B42M100	10m
13	1200668861	884031B36M0507Y	5m
14	1200668862	884031B36M1007Y	10m
15	1200668877	883031B30M006	0.6m
16	1200668878	883031B30M010	1m
17	1200668879	883031B30M020	2m
18	1200668880	883031B30M030	3m
19	1200668881	883031B30M050	5m
20	1200668882	883031B30M100	10m
21	1200668883	888031B41M006	0.6m
22	1200668884	888031B41M010	1m
23	1200668885	888031B41M020	2m
24	1200668886	888031B41M030	3m
25	1200668887	888031B41M050	5m
26	1200668888	888031B41M100	10m
27	1200668997	885031B30M006	0.6m
28	1200668998	885031B30M010	1m
29	1200668999	885031B30M020	2m
30	1200669000	885031B30M030	3m
31	1200669001	885031B30M050	5m
32	1200669002	885031B30M100	10m
33	1200669047	884031B36M0057Y	0.5m
34	1200669048	884031B36M0107Y	1m
35	1200669049	884031B36M0157Y	1.5m

Pos.	Part No.	Engineering No.	Cable Length
36	1200669050	884031B36M0207Y	2m
37	1200669051	884031B36M0307Y	3m
38	1200669052	884031B36M0407Y	4m
39	1200669053	884031B36M0607Y	6m
40	1200669054	884031B36M0807Y	8m
41	1200669055	884031B36M1207Y	12m
42	1200669056	884031B36M1507Y	15m
43	1200669057	884031B36M2007Y	20m
44	1200669058	884031B36M2507Y	25m
45	1200669059	884031B36M3007Y	30m
46	1200669060	885031B36M0057Y	0.5m
47	1200669061	885031B36M0107Y	1m
48	1200669062	885031B36M0207Y	2m
49	1200669063	885031B36M0307Y	3m
50	1200669064	885031B36M0407Y	4m
51	1200669065	885031B36M0507Y	5m
52	1200669066	885031B36M0607Y	6m
53	1200669067	885031B36M0807Y	8m
54	1200669068	885031B36M1007Y	10m
55	1200669069	885031B36M1207Y	12m
56	1200669070	885031B36M1507Y	15m
57	1200669071	885031B36M1807Y	18m
58	1200669072	885031B36M2007Y	20m
59	1200669073	885031B36M2507Y	25m
60	1200669074	885031B36M3007Y	30m
61	1200669241	885031B30M0067	0.6m
62	1200669243	885031B30M0207	2m
63	1200669272	884031B55M010	1m
64	1200669273	884031B55M020	2m
65	1200669274	884031B55M030	3m
66	1200669275	884031B55M050	5m
67	1200669276	884031B55M060	6m
68	1200669277	884031B55M100	10m
69	1200669278	884031B55M150	15m
70	1200669371	885031B30M010H	1m

Pos.	Part No.	Engineering No.	Cable Length
71	1200669419	884031B55M070	7m
72	1200669420	884031B55M200	20m
73			
74			
75			
76			
77			
78			
79			
80			
81			
82			
83			
84			
85			
86			
87			
88			
89			
90			
91			
92			
93			
94			
95			
96			
97			
98			
99			
100			
101			
102			
103			
104			
105			

Pos.	Part No.	Engineering No.	Cable Length
106			
107			
108			
109			
110			
111			
112			
113			
114			
115			
116			
117			
118			
119			
120			
121			
122			
123			
124			
125			
126			
127			
128			
129			
130			
131			
132			
133			
134			
135			
136			
137			
138			
139			
140			

SYMBOLS = 0 = 0 = 0 = 0 = 0 = 0 = 0 = 0 = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION DIMENSION UNITS: mm SCALE: 1:1	CURRENT REV DESC: EC NO: 172344 DRWN: SSM 2018/02/12 CHK'D: RSILLER 2018/02/14 APPR: RSILLER 2018/02/15	 CSE M12 XP AC FE RA WSOR MA STR XM DE			
	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 1.0° 4 PLACES ± 3 PLACES ± 2 PLACES ± 0.05 1 PLACE ± 0.1 0 PLACES ± 0.2					PRODUCT CUSTOMER DRAWING
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS THIRD ANGLE PROJECTION		DRWING: JMARSZALEK 2016/08/12 APPR: RSILLER 2016/08/29	DOCUMENT NUMBER: 1200668999 DOC TYPE: PSD DOC PART: 000 REVISION: A2	MATERIAL NUMBER: SEE PART LIST CUSTOMER: GENERAL MARKET SHEET NUMBER: 3 OF 3	
	A3-SIZE SERIES: 120066					