


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 200 LBS. [ 889 NEWTONS ]  
WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS  
AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:  
 .XXX = ±.010 [ .25 ]  
 .XX = ±.02 [ .5 ]  
 .X = ±.03 [ .8 ]  
 ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL

PANDUIT PART NO.	MAX BUNDLE DIAMETER	PACKAGE QTY	LENGTH L=±.3 [ 7 ]
MLT1S-CP316	1" [ 25 ]	100	5.0" [ 127 ]
MLT2S-CP316	2" [ 51 ]	100	7.9" [ 201 ]
MLT2.7S-CP316	2.7" [ 69 ]	100	10.2" [ 259 ]
MLT4S-CP316	4" [ 102 ]	100	14.3" [ 362 ]
MLT6S-CP316	6" [ 152 ]	100	20.5" [ 521 ]
MLT8S-CP316	8" [ 203 ]	100	26.8" [ 679 ]
MLT10S-CP316	10" [ 254 ]	100	33.0" [ 838 ]

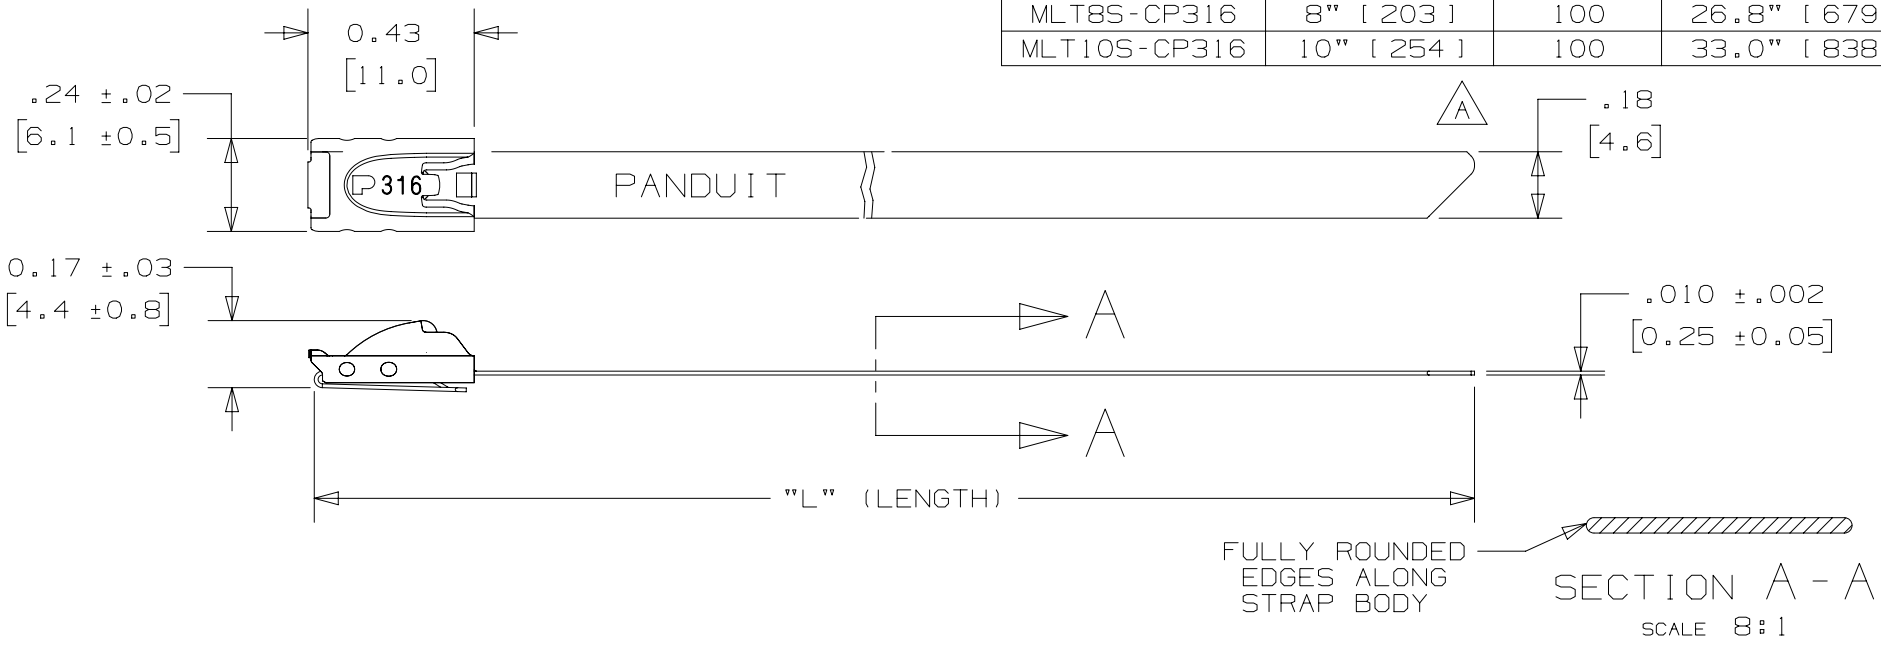

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
10	10.09.15	BDK	SKB	RGRO	A. ADDED NEW TIP CONFIGURATION	N41120BS_DC
09A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01037
08A	2/12	MIM	RGRO	---	NOTE:#3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	----

TITLE		METAL LOCKING TIE STANDARD SERIES 316 STAINLESS STEEL		
ITEM REVISION NAME		CUSTOMER DRAWING		
DATASET FILE NAME		N41120BS/10		
		N41120BS_DC/010A		
MATERIAL:		316 STAINLESS STEEL		
DRAWING NUMBER:		N41120BS_DC		
DRAWN BY	DATE	CHK	SCALE	SIZE
JAMB	2/12	DPN	2:1	A
SHT 1 OF 1				