
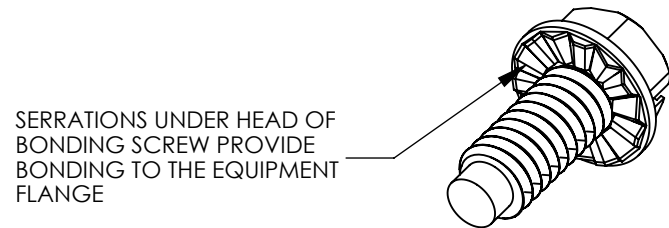


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. CONFORMS TO EIA--310-D SPECIFICATIONS FOR RACKS AND CABINETS.
2. THE BONDING CAGE NUT AND BONDING SCREW MUST BE USED TOGETHER TO ACHIEVE BONDING BETWEEN EQUIPMENT MOUNTING FLANGES AND CAGE NUT RAILS. DO NOT SUBSTITUTE THE BONDING CAGE NUT OR BONDING SCREW WITH ANY OTHERS.

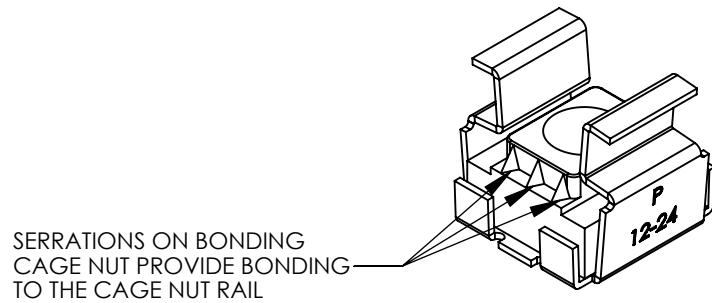

COMPONENT DESCRIPTION	PART NUMBERS	
	CNB4K	CNBK
	QUANTITY	
BONDING CAGE NUT CAGE NUT RAIL THICKNESS TOLERANCE: 0.064 TO 0.105 in. [1.63mm TO .27 mm] GREEN	4	50
GREEN BONDING SCREW, 1/2 in. [12.7 mm] LONG COMBO HEAD UTILIZES, #2 PHILLIPS OR SLOTTED SCREWDRIVER OR 5/16 in. OR 8mm SOCKET DRIVE	4	50

03	11/11	JHNU	RGB	REVISED PANEL THICKNESS: 0.105 WAS 0.0105	N10966BD-C41747	RGB	RGB
02	9/11	JHNU	RGB	ADDED NOTE 2 REVISED COMPONENT DESCRIPTION	N10966BD-C41747	RGB	RGB
01	7/08	JHNU	JMAR	REVISED SCREW VIEW AND DESCRIPTION			
00	4/08	JHNU	JMAR	RELEASED			
REV	DATE	BY	CHK	DESCRIPTION	ECN	-R	SUP

**PANDUIT CORP. TINLEY PARK, ILLINOIS**

**BONDING CAGE NUT KIT  
(CNB4K, CNBK)  
CUSTOMER DRAWING**

SCALE N/A DRAWING NO / CAD FILE C41747\_03