


# DATASHEET

## Modbus Serial Lite Communication Module MVI69L-MBS

The MVI69L-MBS, Modbus Serial module for the CompactLogix™ series of controllers is designed for smaller applications where communication between a few Modbus Serial devices is required. This module has an Add-on Profile and an Add-on Instruction to reduce commissioning time. The MVI69L-MBS has a single serial port and can support either Master or Slave connectivity to interface with a variety of devices using the Modbus Protocol.

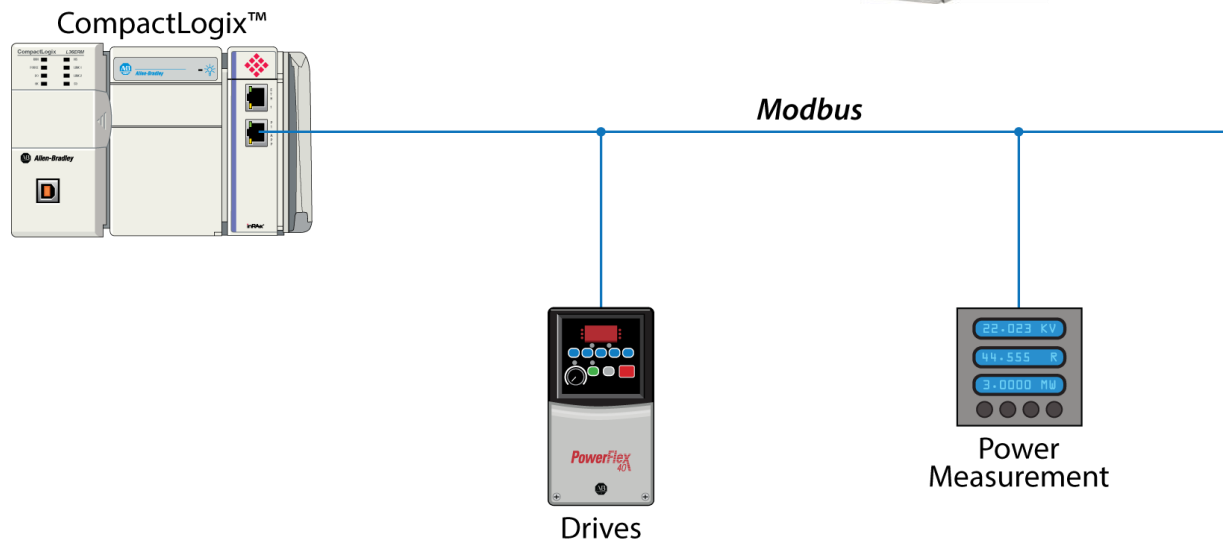

### Features

- ◆ Supports CompactLogix processors with 1769 I/O bus capability version 16 and greater (MicroLogix 1500 not supported)
- ◆ Add-on Instruction creates UDTs, providing logical definitions for I/O, status, and control data
- ◆ Add-on Profile support, improving integration in the CompactLogix System
- ◆ Diagnostic data available in processor controller tags, enabling decisions to be made based upon node health
- ◆ Module configuration backed up in CompactLogix project (ACD file)
- ◆ Module acts as a co-processor reducing impact to PLC scan time
- ◆ Supports up to 240 words of I/O data
- ◆ Application port can be configured as either a Modbus Master or Modbus Slave
- ◆ Supports up to 30 Modbus Commands as a Modbus Master
- ◆ Supports Enron and Daniel style Floating point data implementations
- ◆ Most suitable for OEM and Machine Builder applications

## General Specifications

Configuration	ProSoft Configuration Builder	
I/O Size	240/240 - 16 bit integers	
Communication parameters	Baud Rate: 110 to 115K baud Stop Bits: 1 or 2 Data Size: 7 or 8 bits Parity: None, Even, Odd RTS Timing delays: 0 to 65535 milliseconds	
Modbus Modes	RTU mode (binary) with CRC-16 ASCII mode with LRC error checking	
Floating Point Data	Floating point data movement supported, including configurable support for Enron, Daniel <sup>®</sup> , and other implementations	
Modbus Function Codes Supported	1: Read Coil Status 2: Read Input Status 3: Read Holding Registers 4: Read Input Registers 5: Force (Write) Single Coil 6: Preset (Write) Single Holding Register 8: Diagnostics (Slave Only, Responds to Subfunction 00)	15: Force( Write) Multiple Coils 16: Preset (Write) Multiple Holding Registers 17: Report Slave ID (Slave Only) 22: Mask Write Holding Register (Slave Only) 23: Read/Write Holding Registers (Slave Only)

## Functional Specifications

### Modbus Master

A port configured as a Modbus Master actively issues Modbus commands to other nodes on the Modbus network.

Command List	Up to 30 commands, each fully configurable for function, slave address, register to/from addressing and word/bit count.
Polling of command list	Configurable polling of command list, including continuous and on change of state.
Status Data	Error codes available on an individual command basis. A slave status list is maintained on an active Modbus Master port.

### Modbus Slave

A port configured as a Modbus Slave permits a remote Master to interact with all data contained in the module.

Node address	1 to 247 (software selectable)
Status Data	Error codes, counters and port status available on an active Modbus Slave port



Where Automation Connects™

## Global Distribution

ProSoft Technology<sup>®</sup> products are distributed and supported worldwide through a network of over 500 distributors in over 50 countries. Our knowledgeable distributors are familiar with your application needs. For a complete list of distributors, go to our web site at:

[www.prosoft-technology.com](http://www.prosoft-technology.com)

## Global Support

We are there for you

All ProSoft Technology products are backed with free, unlimited technical support and a three year warranty. Contact our worldwide Technical Support team directly by phone or email.

## Global Offices

We are where you are

ProSoft Technology has regional offices worldwide available to help you with all your industrial application needs. If you need help choosing a ProSoft Technology solution for your particular application check out our contact information under distributor sales on the web site at:

[www.prosoft-technology.com](http://www.prosoft-technology.com)

Whether your application is large or small, our technical professionals are there to help you choose the right communication solution.

## Hardware Specifications

Specification	Description
Dimensions	Standard 1769 Single-slot module
Current Load	450 mA max @ 5 VDC Power supply distance rating of 4
Operating Temp.	32° F to 140° F (0° C to 60°C)
Storage Temp.	-40° F to 185° F (-40° C to 85° C)
Relative Humidity	5% to 95% (with no condensation)
LED Indicators	OK - Module Status ETH - Ethernet Communication P1 - Serial Communication BP - Backplane Connectivity CFG - Valid Configuration
Debug Port	10/100 Ethernet Port
App Ports (P1)	RS-232, RS-485 or RS-422 RJ45 (DB-9F with supplied cable) RS-232 handshaking configurable 500V Optical isolation from backplane
Shipped with Unit	1 - RJ45 to DB-9M cables for application port 1 - DB-9F breakout boards 1 - 6 foot Ethernet Cable

## Agency Approvals & Certifications

Agency
ATEX; Category 3, Zone 2
CE Mark
CSA; CB Safety
Environmental
KCC
RoHS Compliant
UL/cUL; Class 1, Div. 2 Groups A, B, C, D



## Additional Products

ProSoft Technology® offers a full complement of hardware and software solutions for a wide variety of industrial communication platforms. For a complete list of products, visit our web site at: [www.prosoft-technology.com](http://www.prosoft-technology.com)

## Ordering Information

To order this product, please use the following:

### Modbus Serial Lite Communication Module

MVI69L-MBS

To place an order, please contact your local ProSoft Technology distributor. For a list of ProSoft Technology distributors near you, go to: [www.prosoft-technology.com](http://www.prosoft-technology.com) and select *How to Buy* from the menu.