

Rittal – The System.

Faster – better – everywhere.

Connection adaptor – SV 3439.010

Date : Jan 24, 2019

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Connection adaptor – SV 3439.010

created: 24.01.2019 build on www.rittal.com/uk-en

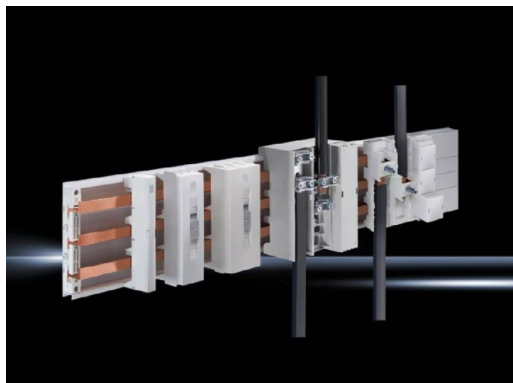

Product description

Material: Cover: ABS
Chassis: Polyamide (PA 6.6).
Chassis 3439.010: Fibreglass-reinforced, thermoplastic polyester (PBT)
Fire protection corresponding to UL 94-V0
Chassis: Fibreglass-reinforced, thermoplastic polyester (PBT)

Colour: RAL 7035

Note: The technical data may vary for UL applications
UL approval only applies in conjunction with AC application
The rated operating voltage for DC applications depends on the busbar arrangement in the busbar support 9340.050/9341.050/9342.050.

Product features

To fit busbars: with cross-section height: 5 mm
with cross-section height: 10 mm

Number of poles: 3-pole

For bar systems with centre-to-centre spacing: 60 mm

Dimensions: Width: 180 mm
Height: 247 mm

Clamping area for laminated copper bars: Width: 24 mm
Height: 21 mm

Connection for round conductor cross- fine wire with wire end ferrule: 35 mm² - 240 mm²
multi-wire: 35 mm² - 240 mm²

sections:

| | |
|-------------------------------|--|
| Rated current (max.): | 600 A |
| Cable outlet: | Top/bottom |
| Packs of: | 1 pc(s). |
| Weight/pack: | 4.56 kg |
| EAN: | 4028177236295 |
| Customs tariff number: | 85369010 |
| ETIM 6.0: | EC001531 |
| ETIM 5.0: | EC001531 |
| eCl@ss 8.0/8.1: | 27370304 |
| eCl@ss 7.0/7.1: | 27370304 |
| eCl@ss 6.0/6.1: | 27370304 |
| eCl@ss 5.1/5.1.4: | 27370302 |
| Product description: | SV Connection adaptor, 600 A, 690 V, 3-pole, cable outlet top/bottom, round conductor connection 35-240 mm ² , clamping area WH: 24x21 mm |

Approvals

| | |
|----------------------|---------------------------|
| Approvals: | ABS |
| Certificates: | EAC |
| Declarations: | Declaration of conformity |