Rittal – The System.

Faster – better – everywhere.

Built-in keyboard 19"/4 U with integral touchpad – SM 6446.030

Date : Feb 20, 2019



ENCLOSURES


POWER DISTRIBUTION >> CLIMATE CONTROL

IT INFRASTRUCTURE SOFTWARE & SERVICES

FRIEDHELM LOH GROUP

Built-in keyboard 19"/4 U with integral touchpad – SM 6446.030

created: 20.02.2019 build on www.rittal.com/uk-en

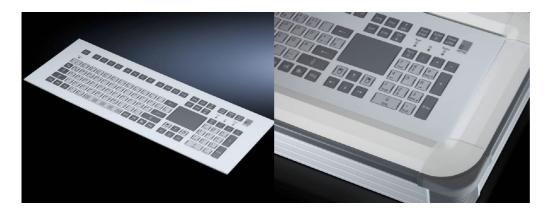

| Product description | n |
|--|--|
| Description: | The integral touchpad eliminates the need for installation of an additional, correct protection category mouse, and cabling is also reduced. The short stroke keys are easily identified by edge embossing, less force is required to operate them, and they have good positive key actuation. |
| Benefits: | The separate number pad enables the parameters to be entered quickly Sealed, wipeable surface finish High level of mechanical and chemical resistance as per DIN 42 115. |
| Material: | Front panel: Aluminium |
| Protection category IP to IEC 60 529: | IP 65 (at the front, sealed) |
| Supply includes: | USB connection cable, length 1.8 m Seal Drilling template Assembly parts for surfaces |
| Product features | |
| Dimensions: | Width: 482.6 mm Width: 19" Height: 177 mm Depth: 30 mm |
| Thread: | Туре: М5 |
| Thread length: | 20 mm |
| | |

| Units: | 4 U |
|--|---|
| Installation dimensions: | Installation depth: 27 mm |
| Operating temperature: | Operation (environment): -40°C+90°C |
| Keyboard layout: | German |
| Number of keys: | 105 |
| Service life: | 3 million switching cycles |
| Actuator travel: | 0.3 mm |
| Actuating force: | 2.6 N |
| Resolution of the capacitive touchpad: | 40 pixels/mm |
| Interfaces/connections: | General: 1 x USB |
| Packs of: | 1 pc(s). |
| Weight/pack: | 1.82 kg |
| EAN: | 4028177682115 |
| Customs tariff number: | 84716060 |
| ETIM 6.0: | EC002620 |
| ETIM 5.0: | EC001692 |
| eCl@ss 8.0/8.1: | 27189261 |
| eCl@ss 7.0/7.1: | 27189261 |
| eCl@ss 6.0/6.1: | 27189261 |
| eCl@ss 5.1/5.1.4: | 27189244 |
| Product description: | SM Built-in keyboard 19"/4 U, WHD: 482,6x177x30 mm, Installation depth: 23 mm, german, With integral touchpad |
| Approvals | |
| Declarations: | Declaration of conformity |