

# Rittal – The System.

Faster – better – everywhere.

## ► Polycarbonate enclosures PK without knockouts – PK 9517.100

Date : Aug 2, 2017

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# Polycarbonate enclosures PK without knockouts – PK 9517.100

created: 02.08.2017 build on [www.rittal.com/uk-en](http://www.rittal.com/uk-en)

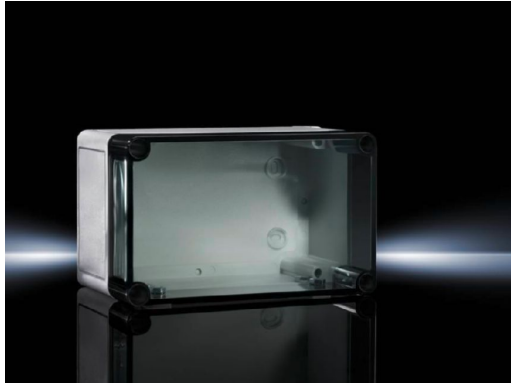

## Product description

**Applications:** Ambient temperature range: -35°C...+80°C  
The specified temperatures may be limited by the installed equipment

**Material:** Housing: Fibre-glass reinforced polycarbonate  
Cover transparent: Polycarbonate, all-round foamed-in PU seal  
Cover screws: Polyamide  
Insulating bungs: Polyethylene

**Colour:** RAL 7035

**Protection category  
IP to IEC 60 529:** IP 66

**Protection category  
NEMA:** NEMA 4X

**Supply includes:** Enclosure with cover  
Cover screws  
Insulating bungs for wall mounting screws

**Basic material:** Polycarbonate

## Product features

**Dimensions:** Width: 182 mm  
Height: 180 mm  
Depth: 90 mm

**Cover:** transparent

<b>Ambient temperature range:</b>	-35°C...+80°C
<b>Packs of:</b>	1 pc(s).
<b>Weight/pack:</b>	0.6 kg
<b>EAN:</b>	4028177139633
<b>Customs tariff number:</b>	94037000
<b>ETIM 6.0:</b>	EC000261
<b>ETIM 5.0:</b>	EC002600
<b>eCl@ss 8.0/8.1:</b>	27180101
<b>eCl@ss 7.0/7.1:</b>	27180101
<b>eCl@ss 6.0/6.1:</b>	27180101
<b>eCl@ss 5.1/5.1.4:</b>	27180102
<b>Product description (long):</b>	PK Polycarbonate enclosure, WHD: 182x180x90 mm, fibreglass-reinforced polycarbonate, without knockouts, with transparent cover
<b>Approvals</b>	
<b>Approvals:</b>	Bureau Veritas C-UL UL
<b>Declarations:</b>	Declaration of conformity