
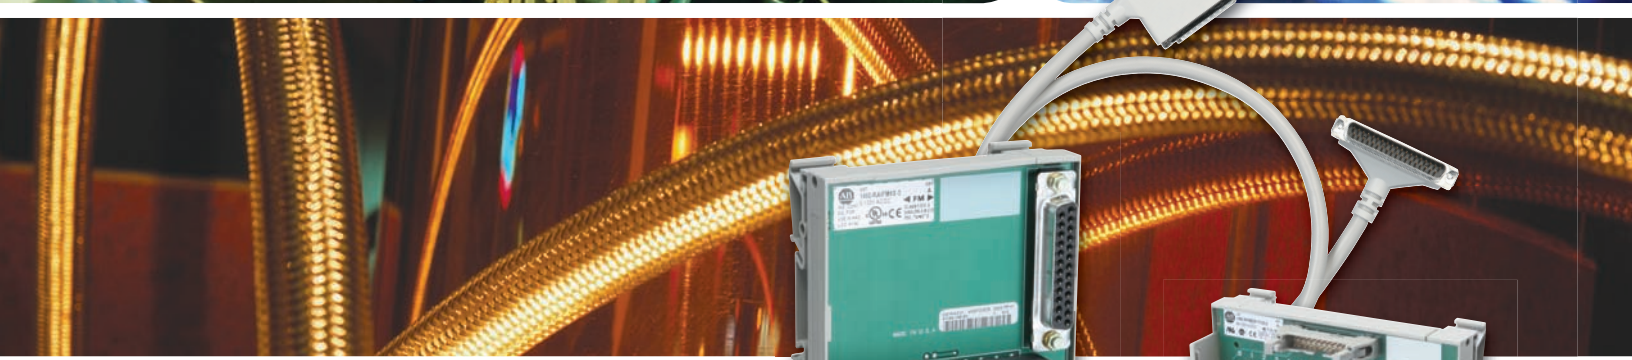
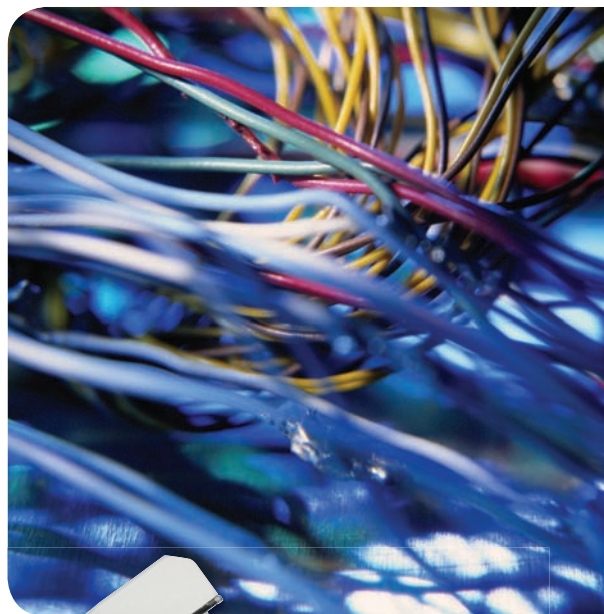


Bulletin 1492 In-Panel I/O Wiring System Modules and Cables for Allen-Bradley Programmable Controllers

Reduced Wiring Time, Accurate Connections

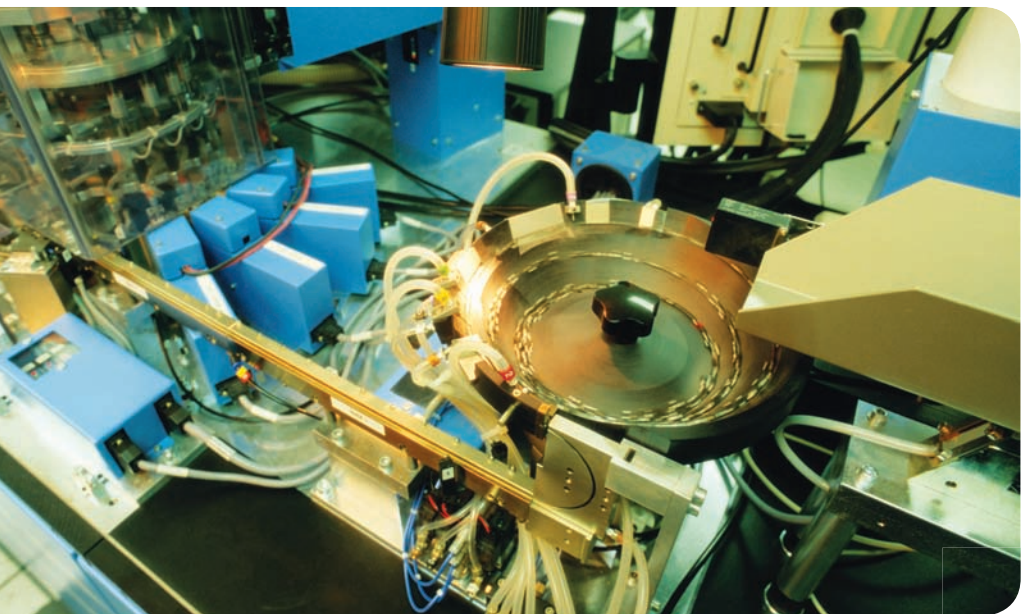

LISTEN.
THINK.
SOLVE.®

 Allen-Bradley • Rockwell Software

**Rockwell
Automation**

Simplify Your Wiring and Reduce Errors

Let's face it: in business, time is money. The last thing you can afford is costly downtime due to incorrect field wiring and troubleshooting your field operations. Quick and easy field wiring solutions not only help reduce your wiring time and maintenance costs, but they allow for more accurate connections.

Let us help you meet your project deadlines with our versatile line of Allen-Bradley I/O field wiring interface modules and cables that can help reduce in-panel programmable controller wiring to discrete (on/off) or analog field devices by up to 75%. This means quicker, more accurate connections between control and factory devices when compared to traditional wiring methods.


Have you struggled with assembling rails of terminal blocks or cutting stripping, labeling and terminating your 20 to 40 control wires per I/O module? With an Allen-Bradley Bulletin 1492 wiring systems solution you simply mount the interface module (IFM) onto a Standard DIN #3 rail. Then, attach the 1492 cable with its pre-wired programmable controller removable terminal block to the programmable controller I/O module and plug the connector into the IFM. In addition, a select group of modules have field Removable Terminal blocks (RTBs) to further simplify initial installation and replacement. It's a snap!

Are wiring errors your concern? We can help you by providing point-to-point connections which reduce the likelihood


of mistakes. Not only will you finish installation more quickly, but you're most likely to be up and running the first time you start up your application.

Troubleshooting an assembled wiring system is easy should an I/O problem arise. Simply pinpoint the problem by looking for glowing LEDs or blown-fuse indicators on selected IFMs.

You'll see troubleshooting in a whole new light. What have you got to lose? Except maybe more time with another wiring method.

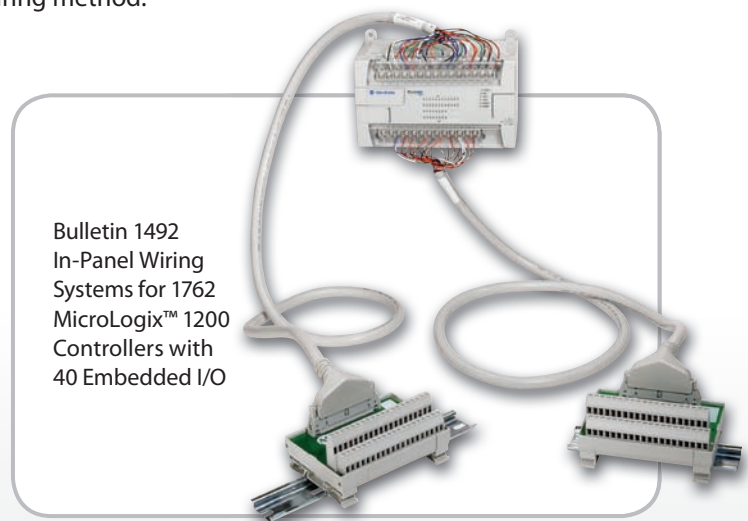



Bulletin 1492
In-Panel Wiring
Systems for 1762
MicroLogix™ 1200
Controllers with
40 Embedded I/O

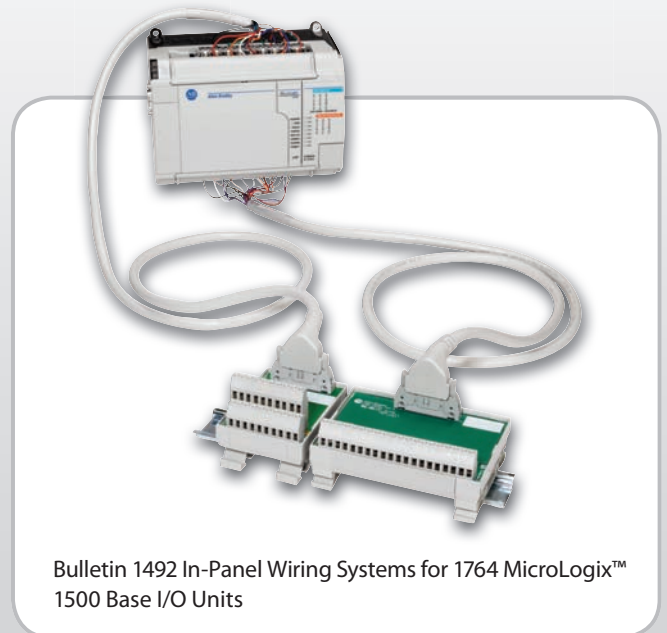


Bulletin 1492 In-Panel Wiring Systems for 1764 MicroLogix™
1500 Base I/O Units




Bulletin 1492 In-Panel Wiring Systems for Flex™ I/O
using Flex d-shell base modules

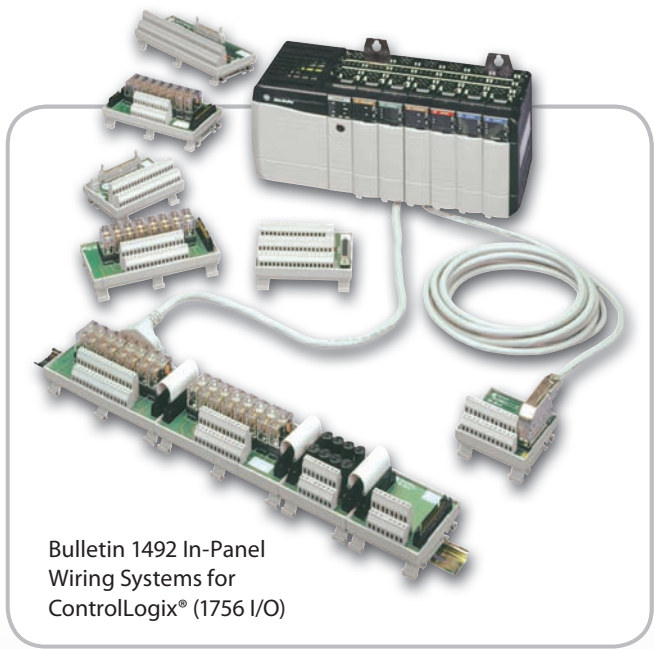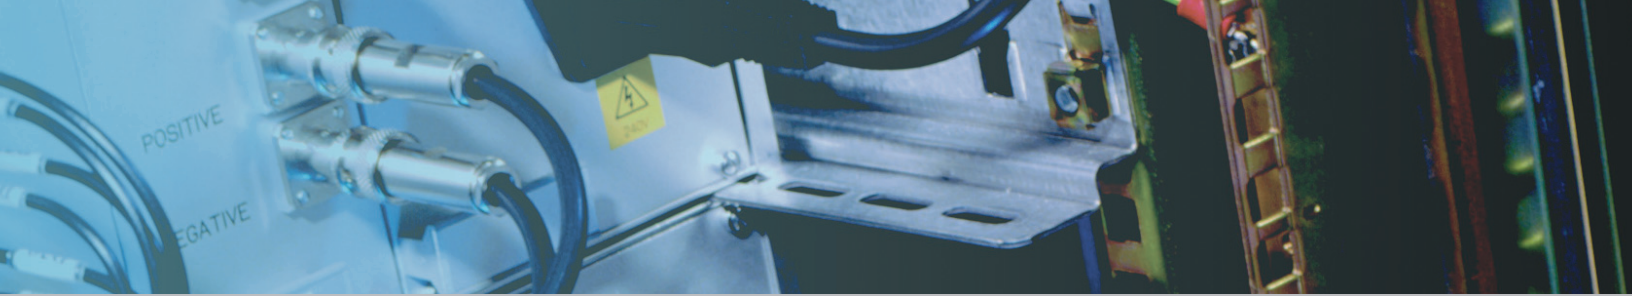


Bulletin 1492 In-Panel
Wiring Systems for
ControlLogix® (1756 I/O)

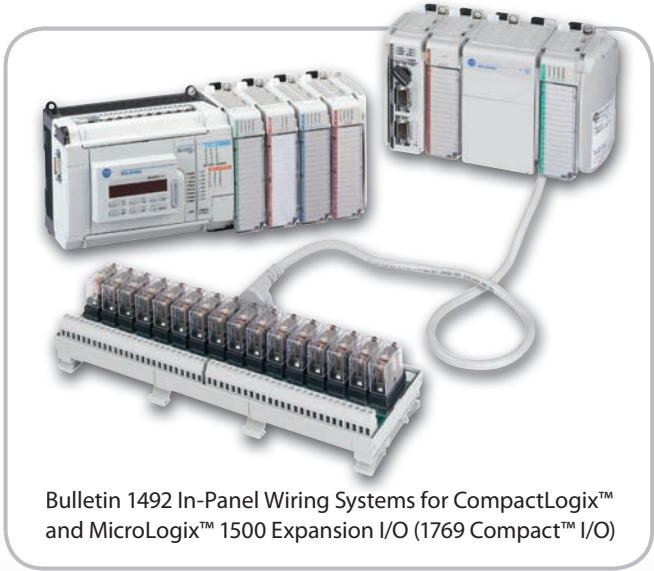

Bulletin 1492 In-Panel Wiring Systems for CompactLogix™
and MicroLogix™ 1500 Expansion I/O (1769 Compact™ I/O)

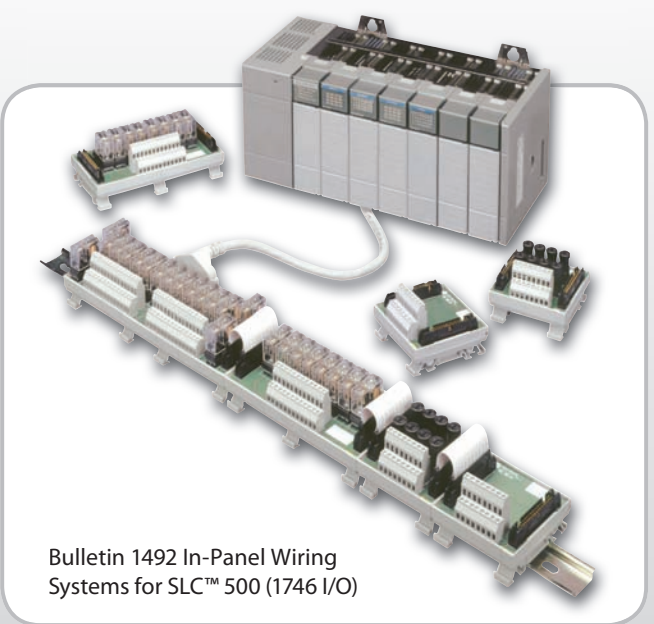

Bulletin 1492 In-Panel Wiring
Systems for SLC™ 500 (1746 I/O)

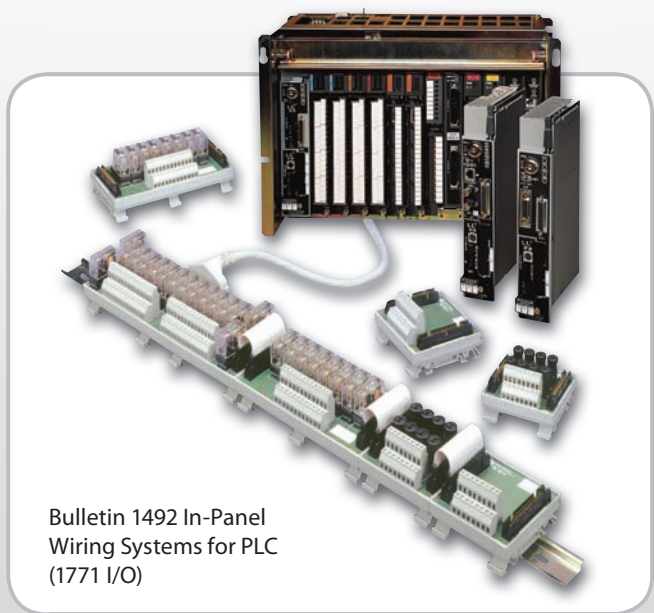

Bulletin 1492 In-Panel
Wiring Systems for PLC
(1771 I/O)

NOTE: In addition to the above Allen-Bradley PLCs, a select group of Bulletin 1492 wiring system modules interface to PowerFlex® 700S and 700H drive control I/O.

Reduce Control I/O Wiring Time and Errors

See for yourself some snapshots showing the benefits of faster point to point I/O wiring installation using a Bulletin 1492 wiring system compared with the traditional terminal block method.


Traditional I/O Wiring Assembly Process

0:23



The assembler begins the arduous task of measuring, and cutting each control wire.

0:36

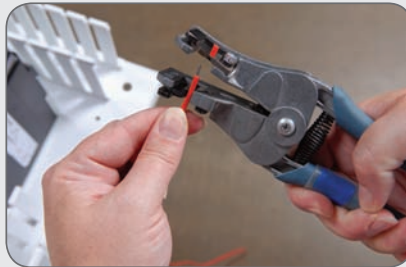

Continuing to measure and cut each control wire.

0:45



Continuing to measure and cut each control wire.

1:08



The assembler using the traditional method has measured and cut about 10 of the 18 wires needed for the same job. And there are numerous steps remaining.

14:58



Still not done with wiring PLC module.

18:04



Assembler has begun the tagging process.

24:37



Finally half of the process is complete and PLC Module is wired and snapped into place.

34:34




Assembler begins tagging each wire before connecting it to the terminal blocks.

37:00




Wiring each terminal block one at a time.

46:30

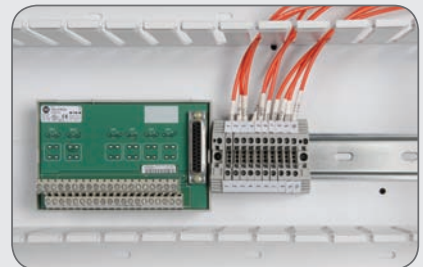

Traditional wiring process is now complete.

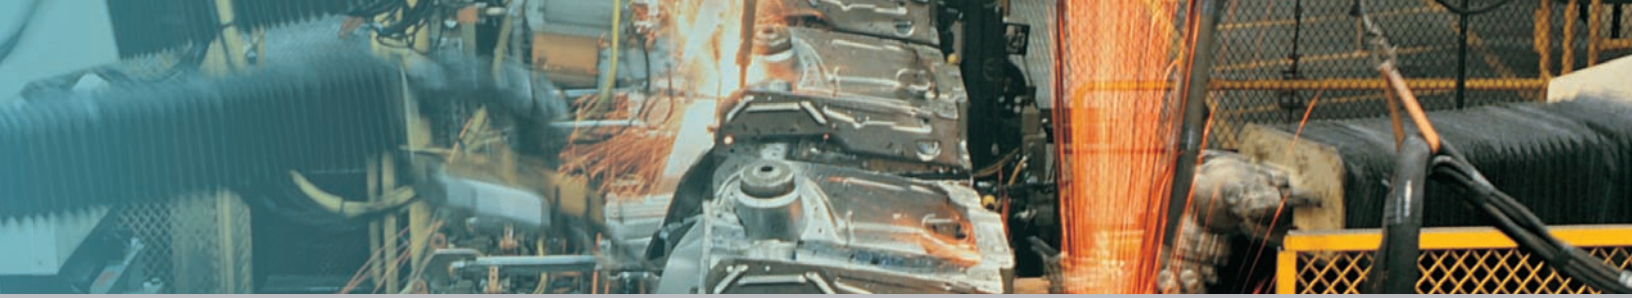

Bulletin 1492 I/O Wiring System Assembly Process

0:23



The assembler removes the Bulletin 1492 Interface Module (IFM) from its box and applies the supplied preprinted labels to mark the terminals.

0:36



Simply snaps the 1492 module to the DIN rail.

0:45



Assembler removes pre-wired 1492 cable from the box and connects the PLC end of the cable to the PLC.

1:04



Then routes the cable through the wire duct and snaps the other end of cable to the 1492 IFM Module.

1:08



Now the process is complete.

Time is Money!

You can achieve up to 75% savings on your control wiring time and reduce wiring errors when using a Bulletin 1492 Wiring System compared with wiring to traditional terminal blocks. To see a video comparing the two wiring methods go to www.ab.com/industrialcontrols/products/terminal_blocks_and_wiring/wiring/digital_interface.html and click on 1492 PLC Wiring System Timesaver Video under "Related Links."

1492

1492

1492

1492

1492

BULLETIN 1492 WIRING SYSTEMS



Type

- 1492 Digital Feedthrough Interface Module

- 1492 Digital LED Interface Module

- 1492 Digital Fused Interface Module

- 1492 Digital Relay Output and Expansion Module

- 1492 Analog Interface Module Feedthrough

Description

- 8/16/32 Point Input and Output Feedthrough Interface Modules

- 8/16/32 Point Input and Output LED Interface Modules

- 8/16/32 Point Input and Output Fused Interface Modules

- 8/16/32 Point Output Relay and Expansion Interface Modules

- 4/8/16 Channel Input and Output Feedthrough Interface Modules

Features

- 20 or 40 Pin Latch Header
- Supports 8/16/32 point AC and DC inputs and output digital modules (Sink & Source)
- Supports 1756, 1769, 1746, 1794 and 1771 Modular I/O
- Also supports all MicroLogix 1764 base I/O, 1762-L40XX base I/O, 700H and 700S PowerFlex Control I/O

- LED's support field wire indication
- 20 or 40 Pin Latch Header
- Supports 16/32 point AC and DC inputs and output digital modules (Sink & Source)
- Supports 1756, 1769, 1746, 1794 and 1771 I/O Platform

- Fuse holders support circuit protection (optional fuse blown indication)
- 20 or 40 Pin Latch Header
- Supports 16/32 point AC and DC inputs and output digital modules (Sink & Source)
- Supports 1756, 1769, 1746, 1794 and 1771 I/O Platform

- Masters Modules – Relay and relay with fused output common
- Relays rated at 12 Amps per pair
- Expansion Modules – relays, fused and feedthrough
- 20 or 40 Pin Latch Header
- Supports 16/32 point AC and DC digital output modules
- Supports 1756, 1769, 1746, 1794 and 1771 I/O Platform

- 15 or 25 Pin D-Shell to I/O with shield
- Supports inputs and output analog modules
- Supports 1756, 1769, 1746, 1794 and 1771 I/O Platforms, 700H and 700S PowerFlex Control I/O

Field Side Terminal Types

- Standard
- Extra Terminal
- Sensor
- Fixed and Removable (Removable as screw or push-in style)

- Standard
- Extra Terminal
- Sensor
- Fixed and Removable (Removable as screw or push-in style)

- Standard
- Extra Terminal
- Fixed and Removable (Removable as screw or push-in style)

- Standard
- Fixed and Removable (Removable as screw or push-in style)

- Extra Terminal
- Fixed and Removable (Removable as screw or push-in style)

Rated Voltage

- 0...265V AC/DC

- 10...30V AC/DC
- 85...132V AC

- 10...30V AC/DC
- 85...132V AC

- 20...28V DC
- 85...132V AC

- 10...30V DC
- 100...132V AC

Maximum Current

- 12 A per module
- 2 A per Circuit

- 12 A per module
- 2 A per Circuit

- 12 A per module
- 2 A per Circuit

- 10 A per Relay Output

- 12 A per module
- 2 A per Circuit

Degree of Protection

- IP20

- IP20

- IP20

- IP20

- IP20

I/O Connection Pin Count

- 20 and 40 Latch Header

- 20 and 40 Latch Header

- 20 and 40 Latch Header

- 20 and 40

- D-Shell 15 and 25

Connector/Body Dimensions

- 210 mm (max) to 60 mm (min) x 83 mm x 50...75 mm

- 210 mm (max) to 110 mm (min) x 83 mm x 50...75 mm

- 210 mm (max) to 110 mm (min) x 83 mm x 50...75 mm

- 280 mm (max) to 160 mm (min) x 83 mm x 65 mm

- 114.5 mm x 83 mm x 50...65 mm

Cable O.D.

—

—

—

—

—

Field Terminal Wire Range (Rated Cross Reference)

- #22...#12 AWG
- (0.2...4 mm²)

- #22...#12 AWG
- (0.2...4 mm²)

- #22...#12 AWG
- (0.2...4 mm²)

- #22...#12 AWG
- (0.2...4 mm²)

- #22...#12 AWG
- (0.2...4 mm²)

Indicator Circuit Current (Nominal)

—

- 2.0...2.6 mA

- 1.2...2.5 mA

—

—

Certifications

- cULus: Hazardous Locations Class I DIV 2, CE, Factory Mutual

- cULus: Hazardous Locations Class I DIV 2, CE, Factory Mutual

- cULus: Hazardous Locations Class I DIV 2, CE, Factory Mutual

- cULus: Standard Locations, CE

- cULus: Hazardous Locations Class I DIV 2, CE, Factory Mutual

1492

1492

1492

1492

1492

1492



- 1492 Analog Interface Module Fuse

- 4/8/16 Channel Input Fused Interface Modules

- 15 or 25 Pin D-Shell to I/O with shield
- Supports inputs analog modules
- Supports 1756, 1769, 1746, 1794 and 1771 I/O Platforms, 700H and 700S PowerFlex Control I/O

- Extra Terminal

- 10...30V DC
- 10...132V AC

- 12 A per module
- 2 A per Circuit

- IP20

- D-Shell 15 and 25

- 114.5 mm x 83 mm x 43 mm (out) & 38 mm (in)

- #22...#12 AWG
- (0.2...4 mm²)

- cULus: Hazardous Locations Class I DIV 2, CE, Factory Mutual



- 1492 Analog Interface Module (Thermocouple)

- 6 Channel Thermocouple Input Module for 1756

- 25 Pin D-Shell to I/O with shield
- Supports thermocouple input analog module
- Supports 1756 I/O Platform

- Extra Terminal

- 10...30V DC

- 12 A per module
- 2 A per Circuit

- IP20

- D-Shell 25

- 114.5 mm x 83 mm x 65 mm

- #22...#12 AWG
- (0.2...4 mm²)

- cULus: Hazardous Locations Class I DIV 2, CE, Factory Mutual



- 1492 CABLE & 1492-CAB

- 1492 to PLC Pre-Wired Digital I/O Cables

- 20 or 40 pin
- Standard length cables – 0.5, 1.0, 2.5, 5.0 mm
- 20 or 40 pin build to order length cables
- Supports 1756, 1769, 1746, 1794, and 1771 I/O Platforms
- #22 AWG Wire

- 300V 80°C

- 2 A per connector

- 9.0 mm (0.36") 20 Pin
- 11.7 mm (0.46") 40 Pin

- cULus: Hazardous Locations Class I DIV 2



- 1492-ACABLE & 1492-ACAB

- 1492 to PLC Pre-Wired Digital I/O Cables

- 15 and 25 pin
- Standard length cables with shield – 0.5, 1.0, 2.5, 5.0 mm
- 15 and 25 pin build to order length cables with shield
- Supports 1756, 1769, 1746, 1794 and 1771 I/O Platforms
- #22 AWG Wire

- 300V 80°C

- 2 A per connector

- 6.78 mm (0.267")
- 7.44 mm (0.293")
- 8.43 mm (0.332")
- 10.2 mm (0.40")
- 11.5 mm (0.45")

- cULus: Hazardous Locations Class I DIV 2



- IFM Ready

- 1492 IFM Ready Cables for Digital I/O


- 20 or 40 pin IFM
- Standard Length cables with flying leads – 1.0, 2.5, 5.0 mm
- 20 or 40 pin build to order length cables with flying leads
- Supports 1756, 1769, 1746, 1794, 1771 and other or non-Allen-Bradley I/O Platforms
- #18 and #22 AWG Wire

- 300V 80°C

- 2 A per connector

- 9.0 mm (0.36")
- 11.4 mm (0.45")
- 14.1 mm (0.56")

- cULus: Hazardous Locations Class I DIV 2



- I/O Ready

- 1492 I/O Ready Cables for Digital I/O

- I/O ready 20 or 40 connection standard length cables with flying leads 1.0, 2.5, 5.0 mm
- I/O Ready 20 or 40 connection build to order length cables
- Supports 1756, 1769, 1746, 1794 and 1771 I/O Platforms
- #18 and #22 AWG Wire

- 300V 80°C

- 2 A per connector

- 9.0 mm (0.36")

- cULus: Hazardous Locations Class I DIV 2

Selection Overview

Please refer to the Bulletin 1492 Wiring Systems Technical Data and the Allen-Bradley Industrial Controls catalog for detailed information and catalog number explanations.

Types of Controllers:

Programmable Automation Controllers:

CompactLogix, ControlLogix and FlexLogix™

- Merge PC-based and PLC architecture
- Provide multidiscipline automation (i.e., process, discrete, motion, drive and batch) within a single hardware and software platform
- Provide scalability and application portability within an open, modular architecture (number) and the column (I/O module). The "Letter Code" represents the suffix of the pre-wired cable.

Programmable Logic Controllers are:

MicroLogix, PLC-5®, SLC500

Implement specific functions such as:

- I/O control
- logic
- timing
- communication
- report generation
- data file manipulation
- arithmetic
- counting

Modules:

IFM – Interface Module

RTB – Removable Terminal Block

RIFM – RTB Style IFM

XIM – Relay Master/Expander

RXIM – RTB Style XIM

AIFM – Analog IFM

RAIFM – RTB Style Analog IFM

Product Selection Tools

Great tools for you to use for easier product selection.

1. Bulletin 1492 Wiring Systems Technical Data Publication# 1492-TD008D-EN-P
2. On-line catalog at www.ab.com
3. Product Selection Toolbox at: <http://www.rockwellautomation.com/en/e-tools/>
4. Industrial Controls Catalog

Allen-Bradley and Rockwell Software are trademarks of Rockwell Automation, Inc.

www.rockwellautomation.com

Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

Europe/Middle East/Africa: Rockwell Automation, Vorstlaan/Boulevard du Souverain 36, 1170 Brussels, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846