

Rittal – The System.

Faster – better – everywhere.

Compact light – SZ 4140.020

Date : Apr 14, 2016

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Compact light – SZ 4140.020

created : 14.04.2016 build on www.rittal.com/uk-en

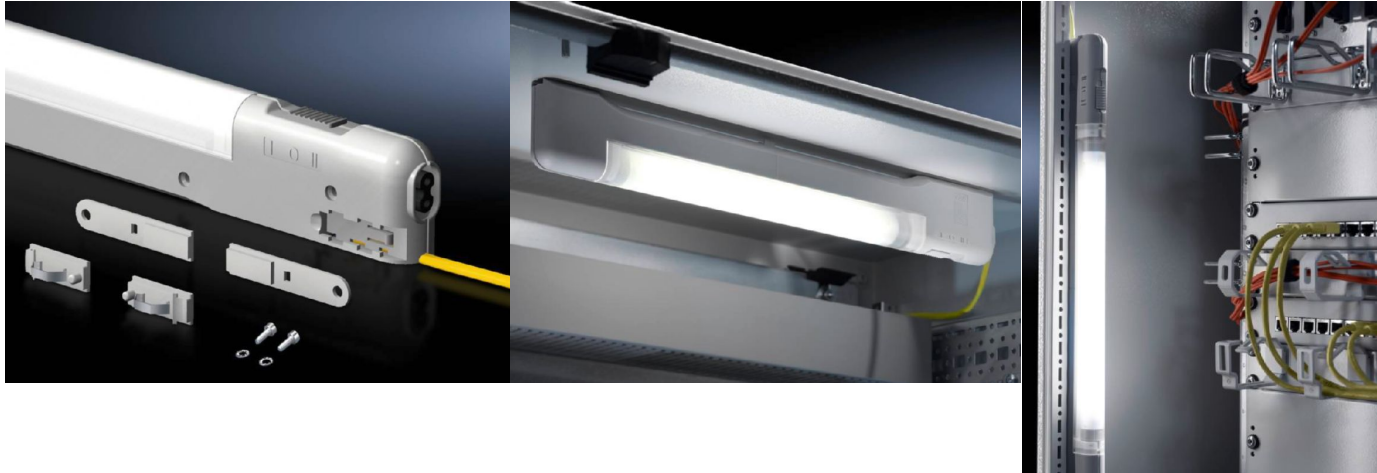

Product description

Benefits:

- Slimmer: Around 50% less height and depth and therefore around 75% less volume than conventional lights
- Faster: Universal fast attachment to the TS slots via clips, screws, or powerful magnets (optional). Simply slide in at the side or rear, fit the light, and it's done!
- Door-operated switch can also be connected via a 2-pole connector
- Transparent light cover, grooved on the inside

Colour: Similar to RAL 7035

**Protection category
IP to IEC 60 529:** IP 20

Supply includes:

- Compact light with clip and screw mounting kits
- Light
- Light cover
- Connection cable
- Assembly parts

Note: Door-operated switch can also be connected via a 2-pole connector

Note on Model No.: Cable deflector across rear possible

Packs of: 1 pc(s).

EAN: 4028177522749

**Customs tariff
number:** 94054095

eCl@ss 5.1: 27189241

eCl@ss 7.0: 27189241

ETIM 6.0: EC000321

Product features

Dimensions: Width: 705 mm
Height: 59 mm
Depth: 24 mm

Rated operating voltage: 100 V - 240 V, 1~, 50 Hz/60 Hz
Voltage tolerance: $\pm 10\%$

Installation options: TS horizontal section of the roof frame: direct
TS, SE vertical section: direct
SE extrusions at the front and rear of the roof frame: direct
SE extrusions at the side of the roof frame: direct
AE, CM, TP: with magnetic attachment
AE: with rail for interior installation

Mounting dimensions: Mounting distance – clip/magnet: 650 mm
Mounting distance – screw attachment: 725 mm

Operating temperature: Operation (environment): $-15^{\circ}\text{C} \dots +45^{\circ}\text{C}$
Bearing: $-20^{\circ}\text{C} \dots +70^{\circ}\text{C}$

Rated current: At 230 V/50 Hz: 0,073 A - 0,127 A
At 110 V/60 Hz: 0,149 A - 0,216 A

Power consumption: 14 W

Equipment (electrical): Ballast: Wide-range electronic ballast
Light: Fluorescent lamp T5
Length of connection cable: 3 m
Colour of cable: Yellow
Switch (type): Integral, on/off/door-operated switch mode

Rated insulation voltage: 500 V DC/3.75 A

Rated impulse withstand voltage, phase to earth: 1000 V AC

Rated impulse withstand voltage, phase to phase: 500 V AC

Light – installation type: Screw-fastening
Clip attachment
Magnetic attachment (accessory)

Cable deflector across rear possible: yes


Light cover: yes

Weight/pack: 0.78 kg

Approvals

Declarations:  [Declaration of conformity \(EN, DE\)](#)

Downloads

Documentation:  [Instructions \(SE, DE, EN, FR, NL, IT, JP\)](#)

CAD drawings: Request
