

Rittal – The System.

Faster – better – everywhere.

Door-operated switch – SZ 4315.320

Date : Jan 25, 2019

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Door-operated switch – SZ 4315.320

created: 25.01.2019 build on www.rittal.com/uk-en

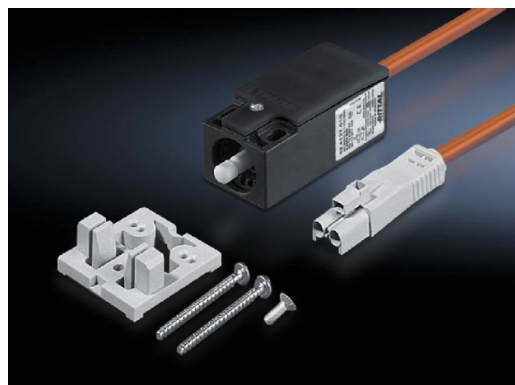

Product features

Dimensions:	Length: 1000 mm
Rated operating voltage:	400 V
Installation options:	for standard and courtesy light without integral door-operated switch
For rated current (max.):	240 V AC, 6 A
Equipment (electrical):	Colour of cable: Orange
Rated insulation voltage:	400 V AC
Rated impulse withstand voltage, phase to phase:	6000 V AC
Packs of:	1 pc(s).
Weight/pack:	0.14 kg
EAN:	4028177581333
Customs tariff number:	85444290
ETIM 6.0:	EC002626
ETIM 5.0:	EC002626

eCl@ss 8.0/8.1:	27189266
eCl@ss 7.0/7.1:	27119116
eCl@ss 6.0/6.1:	27119116
eCl@ss 5.1/5.1.4:	27189241
Product description:	SZ Door-operated switch, with connection wire, L: 1000 mm, orange
Approvals	
Approvals:	CCC
Certificates:	EAC
Declarations:	Declaration of conformity