

Secure High-Availability Remote Access to Industrial Devices



- The SiteManager™ itself and its monitored devices are all centrally managed and accessible from the GateManager server
- Built-in serial, USB and Ethernet access agents for most PLC, HMI and Servo vendors in the market, as well as agent templates for video, voice, PC and Scada systems (including support for Siemens PPI and MPI)
- Firewall friendly communication,- uses standard web protocols, and only inside-out
- No requirement for public or fixed IP address. SiteManager is by default DHCP enabled. No need to re-configure the PLC with gateway address etc.
- Can operate as carrier of alarms, email alerts etc. between devices and central logging servers over the Internet
- Built-in firewall, AES and x.509 certificates for maximum security
- All configuration, firmware and feature upgrades are done remotely through an intuitive web GUI
- User-configurable email alerts for status monitoring and configurable I/O ports for custom alarms.
- Integrated WiFi for connecting to the Internet via a local Access Point.
- Can operate as WiFi access point via Secomea USB WiFi adapter option
- Optional Internet access via a standard 4G/3G/GPRS modem installed in the USB port
- Includes the unique Secomea EasyTunnel Client feature for allowing easy enrollment in a VPN network
- Security certified in accordance with leading standards methodologies specified by NIST, ISA/IEC, BSI and ISECOM

SiteManager™ is an off-the-shelf component in the Secomea Industrial Communications Solution program that in combination with Secomea's GateManager™ and LinkManager™ ensures unified, uninterrupted and secure access to remote devices.

SiteManager™ is security certified according to the highest industry standards of the industry, performed by the independent security organisation ProtectEM GmbH in Germany in close cooperation with the Deggendorf Institute of Technology.

The SiteManager™ 1149 and 3349 are robust DIN mountable appliances that installs in the machine control panel, and provides remote access for on-demand servicing and programming of equipment, concurrently with static connections for monitoring and logging.

The SiteManager™ 1149 and 3349 provide remote access to all types of industrial equipment via Ethernet,- Serial- or USB, using the equipment's native protocols (e.g. Modbus, PROFINET, EtherCAT; EtherNet/IP etc.).

The SiteManager™ 1149 and 3349 establish access to the Internet through the firewall of the existing wired network infrastructure, or wirelessly by the integrated WiFi option. Additionally the SiteManager features static VPN powered by the unique Secomea EasyTunnel™ concept.

Unique Specifications



Local Access Management and logging

The SiteManager allows local administered access management via its Web GUI or digital ports, in addition to the central user access management. On top of this, all user connections made to the SiteManager and its connected devices are logged centrally on the GateManager.

Drivers for any type device

The SiteManager has built-in preconfigured drivers "agents" for remote accessing any type of device such as PLCs, HMIs, IPCs, Robots, Servos, etc. In addition to this, it is possible to customize an agent for other requirements regardless of it being Serial, Ethernet, WiFi or USB attached.

WiFi operation in both Client and Access Point mode

The SiteManager 1149 and 3349 feature a built-in WiFi module, which can be used for accessing the Internet via a local access point. Applying an external USB adapter will allow operation as an access point for providing remote access to WiFi client enabled devices at the location.

4G/3G/GPRS Option with Wake-on-SMS



The SiteManager 1149 and 3349 feature an optional USB port for attaching a 4G/3G/GPRS adapter for connecting to the Internet. This feature is useful in cases where no local infrastructure exists for connecting to the Internet. In addition the SiteManager supports a Wake-on-SMS that prevent consuming data traffic charges when in idle mode.

Fail-over / Fail-back (Wired / Wireless)

When enabling both the wired and wireless Uplink (WiFi or optional broadband modem), the SiteManager can perform fail-over and thereby ensure maximum uptime. By prioritizing the wired uplink, the SiteManager will automatically fail-back to the wired connection, thus reducing consumption of broadband data charges.

Flexible Alert notification system

Any SiteManager can be used as gateway for alerts generated by local devices via Ethernet, Serial or digital input triggers, by the GateManager monitoring status of the SiteManager and local devices. Alerts are administered by the central GateManager from where they can be sent as SMS or Email. In addition all generated alert are centrally logged.

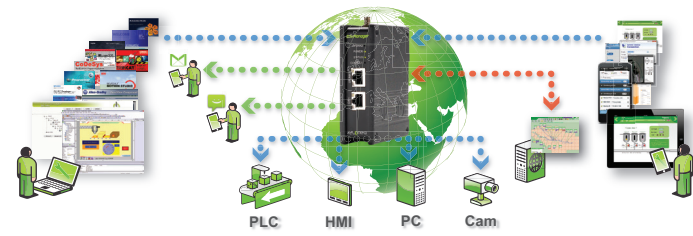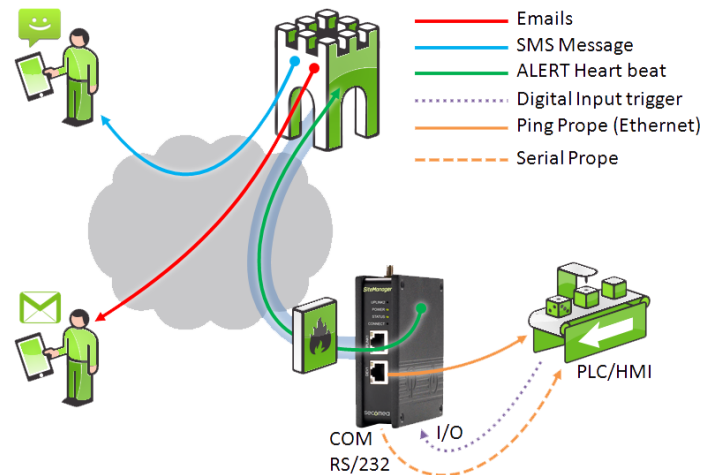

GateManager™ Enabled

GateManager™ enabled for easy, centralized configuration, backup, monitoring and access for remote service and maintenance of Secomea SiteManager and industrial devices. The GateManager is available both as a hosted service and as a stand-alone software package.

LinkManager™ Enabled

The LinkManager is a one-step installation Windows application that runs on the support engineer PC. Working with GateManager™ it provides secure on-demand access to remote Serial, IP or USB devices through the SiteManagers. Once connected, it makes the remote device appear to the field engineer as if the Windows PC was connected directly to the device. So with LinkManager, any remote device is just a few mouse clicks away.

LinkManager™ Mobile Enabled

The LinkManager Mobile is designed for accessing your devices via a tablet, mobile phone or PC without needing installation of software. LinkManager Mobile allows access to devices using Web browser, VNC/RDP Remote Desktop clients and selected iOS and Android Remote HMI apps.

Static Device/Server Relays connections

The SiteManager allows Static relays to a GateManager enabling a central server or SCADA system to monitor devices real-time, or to allow devices to push status updates back to the central server.

Configurable Routing/Forwarding rules

The SiteManager can be configured to port forward or route connections between its Uplink and Device network ports. It can even be used as secure Internet router via an integrated Web proxy.

Optional EasyTunnel™ VPN support

The SiteManager supports the unique Secomea EasyTunnel VPN concept. Enabling the included EasyTunnel Client in the SiteManager, will allow enrollment in a VPN network controlled by a TrustGate concentrator. EasyTunnel works like ordinary IPSec VPN, but without the need for juggling certificates or keys. Simply enter the serial number of the SiteManager, and it is instantly enrolled in the VPN network.

State-of-the-Art Security

The SiteManager solutions are using state-of-the-art security standards. This includes a built-in stateful Inspection Firewall, authentications using x.509 digital certificate and encryption using the strong AES standard with up to 256-bit. The entire solution is Security certified according to the most current standards of the industry.

Firewall Friendly

The end-user network security is priority number 1. With the SiteManager and the security standard that this includes, it is important that end-user do not need to compromise their own corporate security standards. Therefore all communication is encrypted, even when using port 80 from the inside and out.

Technical Specifications



Electrical Characteristics

- 536 Mhz ARM Cortex A5 CPU
- Input 12 - 24 V/DC, via screw terminals
- Network Interfaces: 2 x 10/100 Mbit Ethernet (UPLINK, DEVI) – RJ45 connection
- 2 x USB 2.0 full speed (Host)
- 1 x RS232 DB9 Serial port with full flow control
- Power consumption: max 3W excl. any optional USB device.s (Calculate with a total of 8W incl. USB devices)
- 2 x digital input ports
- 1 x output relay (max 0,5A), 1 x digital output open drain (max 0,2A)
- Integrated 2.4GHz WiFi module for Client mode, IEEE 802.11 b/g/n (AP mode requires external WiFi USB adapter installed)
- WiFi antenna connector, RP-SMA Female

Regulations

- CE (EN 61000-6-2, EN 61000-6-4, EN 301 489-1, EN 301 489-3)
- FCC 47 cfr part 15
- UL Listed (file #E35854), ITE 4ZP8)
- IEC certified (CB certificat DK-30193-A2-UL)
- RCM approval (Available June 2015)

Physical Characteristics

- Operating temperature: -25° - +60C°, 5 to 95% RH
- Dimensions, unpacked: 107(H) x 32(W) x 97(D) mm, 500 g

Secomea A/S
Denmark
E-mail: info@secomea.com
www.secomea.com

- DIN mount bracket
- Aluminium Chassis
- 2-years Warranty

Networking Capabilities

- Choice of Uplink (WAN) Internet access:
 - Ethernet
 - WiFi
 - Optional 3G/4G/GPRS USB modem
- Choice of Uplink IP-assignment mode: DHCP client, PPPoE client, manual/static
- Telnet to Serial routing (rfc2217). Siemens MPI/PPI is supported via an adapter
- DHCP server on Device LAN by Ethernet or as access point via external WiFi USB adapter.
- USB port for remote accessing USB enabled devices (directly or via USB hub)
- EasyTunnel™ support for enabling VPN via Secomea TrustGate
- Support for remote access by any UDP/TCP based protocol

Monitoring and Logging Features

- System log with System Watchdog
- Automatic event logging on GateManager™
- Alert notifications generated by SiteManager or GateManager and sent as email or SMS

Configuration and Management

- Appliance Launcher for easy initial contact and connection to GateManager™
- Configuration and maintenance of SiteManager™ via browser (HTTPS/SSL - local or remote from GateManager™)
- Includes a Setup Assistant Wizard for guided configuration via the Web GUI
- Easy configuration with pre-defined configuration using a USB stick
- Configuration backup management (via GateManager™) including scheduled backup and fast hardware replacement (cold backup)
- Configuration export and import (XML)
- Pre-defined Device Agents for easy setup of access to all PCs, web devices and all common PLCs and HMIs

LED Signaling and I/Os

- 4 LEDs for signalling Power, Status, WiFi status and LinkManager connection
- Digital Input port for site operator control of remote access
- Digital or Relay output for signalling active LinkManager connections, and GateManager connection status
- Configurable digital input port for custom Email/SMS alert triggering
- Output port for custom toggling from the SiteManager GUI

Partnumbers	Description
30102	SiteManager 1149 including 5 Device Agents
30103	SiteManager 3349 including 25 Device Agents
27101	Secomea WiFi USB adapter for operation as Access Point
27250	Secomea WiFi USB adapter with SMA adapter (for operation as Access Point)
26940	MPI/PPI adapter (Ethernet)

