




DESCRIPTION:

Easy Entry Pre-Insulated Crimp Terminals are made from oxygen-free high conductivity copper. They are electro-tin plated for excellent conductivity and resistance to corrosion. Push-On terminals are made from brass, while the insulated types benefit from an additional internal copper sleeve, ensuring insulation support and a good crimp joint. The terminals are available in a choice of insulation material: PVC or nylon.

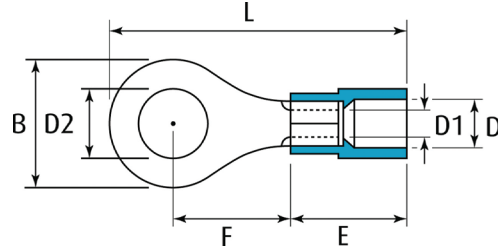

SPECIFICATION:

PVC:

MATERIAL: Electro-tin plated copper
INSULATION: Polyvinyl Chloride
APPROVALS: UL, E211389, RoHS compliant
MAX TEMPERATURE: 75°C
MAX VOLTAGE: 600V



NYLON:

MATERIAL: Electro-tin plated copper
INSULATION: Nylon
APPROVALS: UL, E211389, RoHS compliant
MAX TEMPERATURE: 105°C
MAX VOLTAGE: 600V



PART NUMBERS:

COLOUR/ WIRE Ø mm ²	PART NO.		Max. elect. rating (A)	STUD SIZE D2	DIMENSIONS (mm)						PACK QTY
	PVC	NYLON			B	L	F	E	D	D1	
0.5 - 1.5 RED	CIR1-2	CNIR1-2	19	2.2	6.6	19.6	6.3	10.0	4.1	1.7	100
	CIR1-3	CNIR1-3	19	3.2	5.5	16.7	4.0	10.0	4.1	1.7	100
	CIR1-3.5	CNIR1-3.5	19	3.7	5.5	16.7	4.0	10.0	4.1	1.7	100
	CIR1-4	CNIR1-4	19	4.3	8.0	21.0	7.0	10.0	4.1	1.7	100
	CIR1-5	CNIR1-5	19	5.3	8.0	21.0	7.0	10.0	4.1	1.7	100
	CIR1-6	CNIR1-6	19	6.5	11.6	26.8	11.1	10.0	4.1	1.7	100
	CIR1-8	CNIR1-8	19	8.4	11.6	26.8	11.1	10.0	4.1	1.7	100
	CIR1-10	CNIR1-10	19	10.5	13.6	30.7	13.9	10.0	4.1	1.7	100
	CIR1-12	CNIR1-12	19	13.0	19.2	35.6	16.0	10.0	4.1	1.7	100
1.5 - 2.5 BLUE	CIR2-3	CNIR2-3	27	3.2	6.4	17.5	4.3	10.0	4.5	2.3	100
	CIR2-3.5	CNIR2-3.5	27	3.7	6.4	17.5	4.3	10.0	4.5	2.3	100
	CIR2-4	CNIR2-4	27	4.3	8.5	22.0	7.8	10.0	4.5	2.3	100
	CIR2-5	CNIR2-5	27	5.3	9.5	22.0	7.3	10.0	4.5	2.3	100
	CIR2-6	CNIR2-6	27	6.5	12.0	27.0	11.0	10.0	4.5	2.3	100
	CIR2-8	CNIR2-8	27	8.4	12.0	27.0	11.0	10.0	4.5	2.3	100
	CIR2-10	CNIR2-10	27	10.5	13.6	30.7	13.9	10.0	4.5	2.3	100
	CIR2-12	CNIR2-12	27	13.0	19.2	35.6	16.0	10.0	4.5	2.3	50



CABLECRAFT™
creative wiring solutions



INVESTORS
IN PEOPLE



CABLECRAFT COMPANY

Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297



PART NUMBERS:

COLOUR/ WIRE Ø mm ²	PART NO.		Max. elect. rating (A)	STUD SIZE D2 mm	DIMENSIONS (mm)						PACK QTY
	PVC	NYLON			B	L	F	E	D	D1	
	4 - 6 YELLOW	CIR3-3.5			CNIR3-3.5	48	3.7	9.5	25.5	8.3	
CIR3-4		CNIR3-4	48	4.3	9.5	25.5	8.3	12.5	6.5	3.4	50
CIR3-5		CNIR3-5	48	5.3	9.5	25.5	8.3	12.5	6.5	3.4	50
CIR3-6		CNIR3-6	48	6.5	12.0	29.0	10.5	12.5	6.5	3.4	50
CIR3-8		CNIR3-8	48	8.4	15.0	33.7	13.7	12.5	6.5	3.4	50
CIR3-10		CNIR3-10	48	10.5	15.0	33.7	13.7	12.5	6.5	3.4	50
CIR3-12		CNIR3-12	48	13.0	19.2	38.1	16.0	12.5	6.5	3.4	50



Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297