



DESCRIPTION:

Our range of uninsulated cord end terminals covers cable sizes from 0.5mm² to 150mm². Designed to terminate the end of a cable, prior to fitting into screw type terminal blocks or connectors. The crimped on uninsulated cord end terminal protects the exposed wire strands from damage from the screw, this results in a stronger connection.

SPECIFICATION:


MATERIAL: Tin Plated Electrolytic Copper

HEAT RESISTANCE: Up to 125°C

STANDARDS: DIN 46228 Part 1. RoHS 2 compliant.

PART NUMBERS:

PART NUMBER	SIZE (mm ²)	L1 (mm)	D1 (mm)	S (mm)	PACK QTY.
UNINSULATED CORD END TERMINALS					
CUT0.14-7	0.14	7	0.65	0.15	1000
CUT0.25-7	0.25	7	0.75	0.15	1000
CUT0.34-7	0.34	7	0.85	0.15	1000
CUT0.5-6	0.50	6	1	0.15	1000
CUT0.5-10	0.50	10	1	0.15	1000
CUT0.75-6	0.75	6	1.2	0.15	1000
CUT0.75-10	0.75	10	1.2	0.15	1000
CUT1.0-6	1.00	6	1.4	0.15	1000
CUT1.0-10	1.00	10	1.4	0.15	1000
CUT1.5-7	1.50	7	1.7	0.15	1000
CUT1.5-10	1.50	10	1.7	0.15	1000
CUT2.5-7	2.50	7	2.2	0.15	1000
CUT2.5-10	2.50	10	2.2	0.15	1000
CUT4.0-9	4.00	9	2.8	0.20	1000
CUT4.0-12	4.00	12	2.8	0.20	1000
CUT6.0-15	6.00	15	3.5	0.20	100
CUT10-15	10.00	15	4.5	0.20	100
CUT10-18	10.00	18	4.5	0.20	100
CUT16-15	16.00	15	5.8	0.20	100
CUT16-18	16.00	18	5.8	0.20	100
CUT25-15	25.00	15	7.3	0.20	100
CUT25-18	25.00	18	7.3	0.20	100
CUT35-18	35.00	18	8.3	0.20	100
CUT35-25	35.00	25	8.3	0.20	100
CUT50	50.00	25	10.3	0.30	50
CUT70	70.00	25	12.5	0.35	50
CUT95	95.00	30	14.5	0.35	50
CUT120	120.00	34	16.5	0.45	10
CUT150	150.00	38	18.5	0.50	10
CUT185	185.00	40	20.0	23.0	25
CUT240	240.00	40	22.8	25.80	25

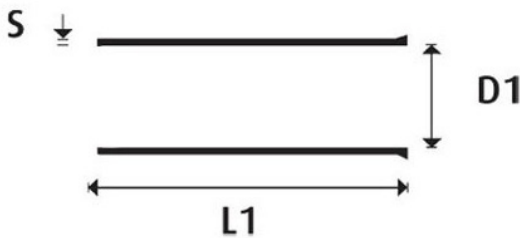

CABLECRAFT™
creative wiring solutions



Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • Fax: 01582 606063 • Email: sales@cablecraft.co.uk • Web: www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297